



State: RELEASE - Document is released and under formal Change Control. Changes are subject to the ECR/ECO Process.
See the GEMS ePDM System to determine the status of this document.

1	2	3	4	5	6	
A						A
B	SHEET_NAME SHT_NUM REV BLOCK 2 INPUT 3 HVDC 4 AXIAL DRIVE 5 LVAC 6 CUSTOMER I/O 7 REVISION PCN NUMBER DATE SIGN OFF					B
C						C
D	标记 REV QTY 改单号 FZ2 No. 签字 MADE BY 日期 DATE 描述 DESCRIPTION GEHW MEDICAL SYSTEMS 名称 NGPDU-3 SCH 设计 DECIGNER 比例 SCALE 文件代号 DOC.NO 审核 CHECKER 复审 RECHECKER 标准 STANDARD 批准 APPROVAL sheet 1 of 7 2326492-3SCH					D
1	2	3	4	5	6	

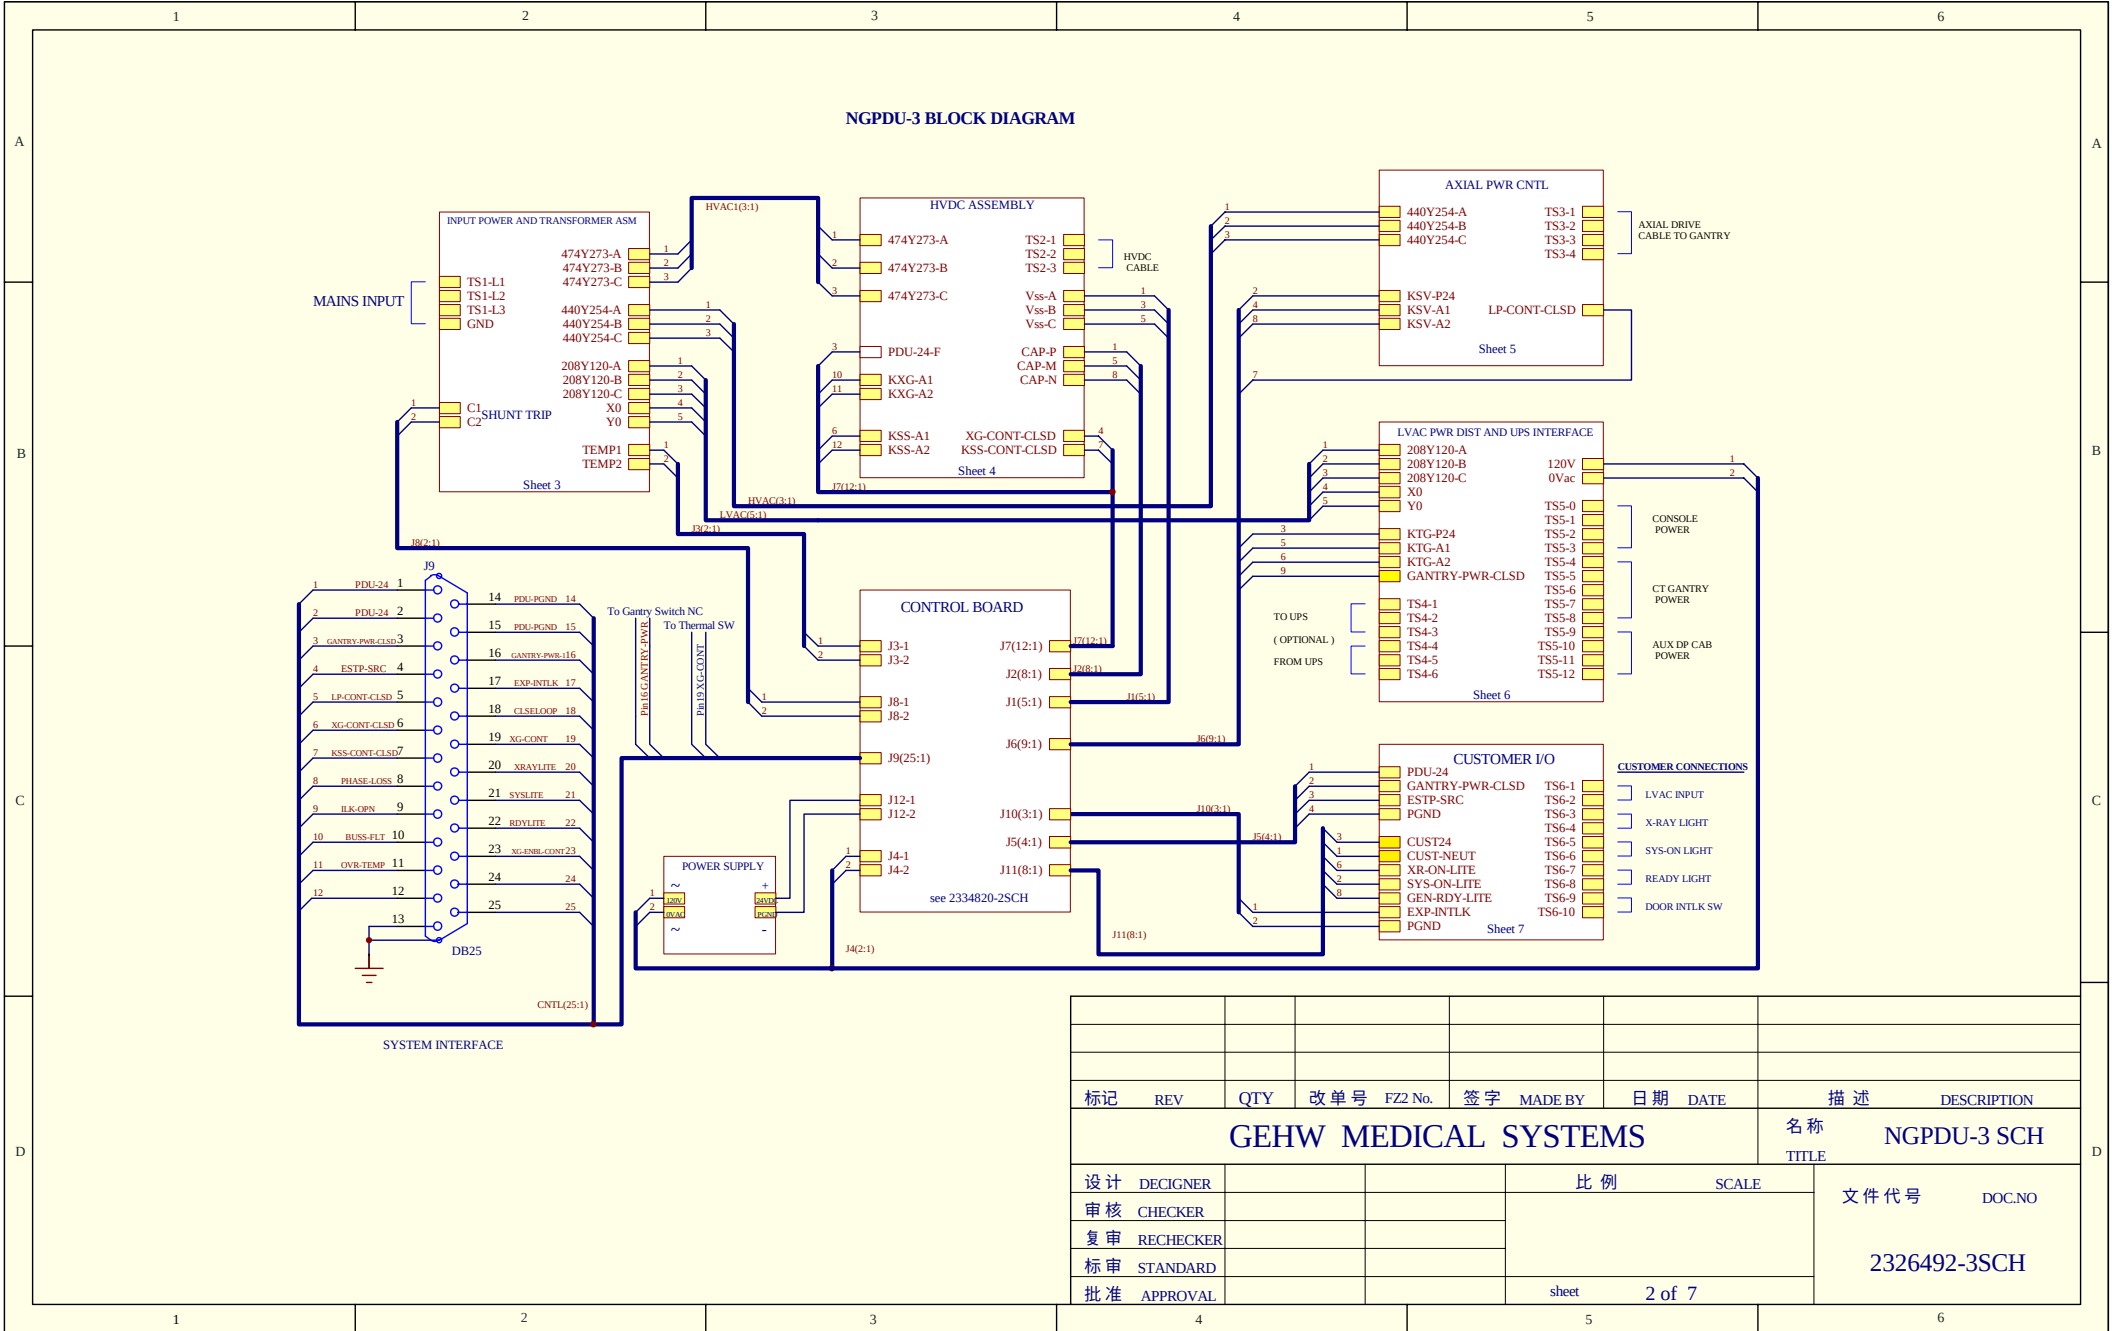

INPUT POWER AND TRANSFORMER ASSEMBLY




FLOATING WYE CONFIGURATION
REQUIRED FOR EMC PREVENTION
GE97F9595, OR MALLORY C32FD3706 OR EQUAL

JUMP SHOWN IN 480V CONNECTION

PRIMARY			SECONDARY	
VOLTAGE	LEAD CONNECTION		VOLTAGE	LEAD CONNECTION
380v	2-6		208Y120	X1,X2,X3,X0
400v	2-5			
420v	2-4			
440v	3-6		474Y273	Y1,Y2,Y3,Y0
460	3-5			
480v	3-4			
				440Y253


标记	REV	QTY	改单号 FZ2 No.	签字 MADE BY	日期 DATE	描述	DESCRIPTION
GEHW MEDICAL SYSTEMS						名称 TITLE	NGPDU-3 SCH
设计	DECIGNER			比例		文件代号	DOC.NO 2326492-3SCH
审核	CHECKER						
复审	RECHECKER						
标审	STANDARD						
批准	APPROVAL			sheet	3 of 7		

State: RELEASE - Document is released and under formal Change Control. Changes are subject to the ECR/ECO Process.
See the GEMS ePDM System to determine the status of this document.

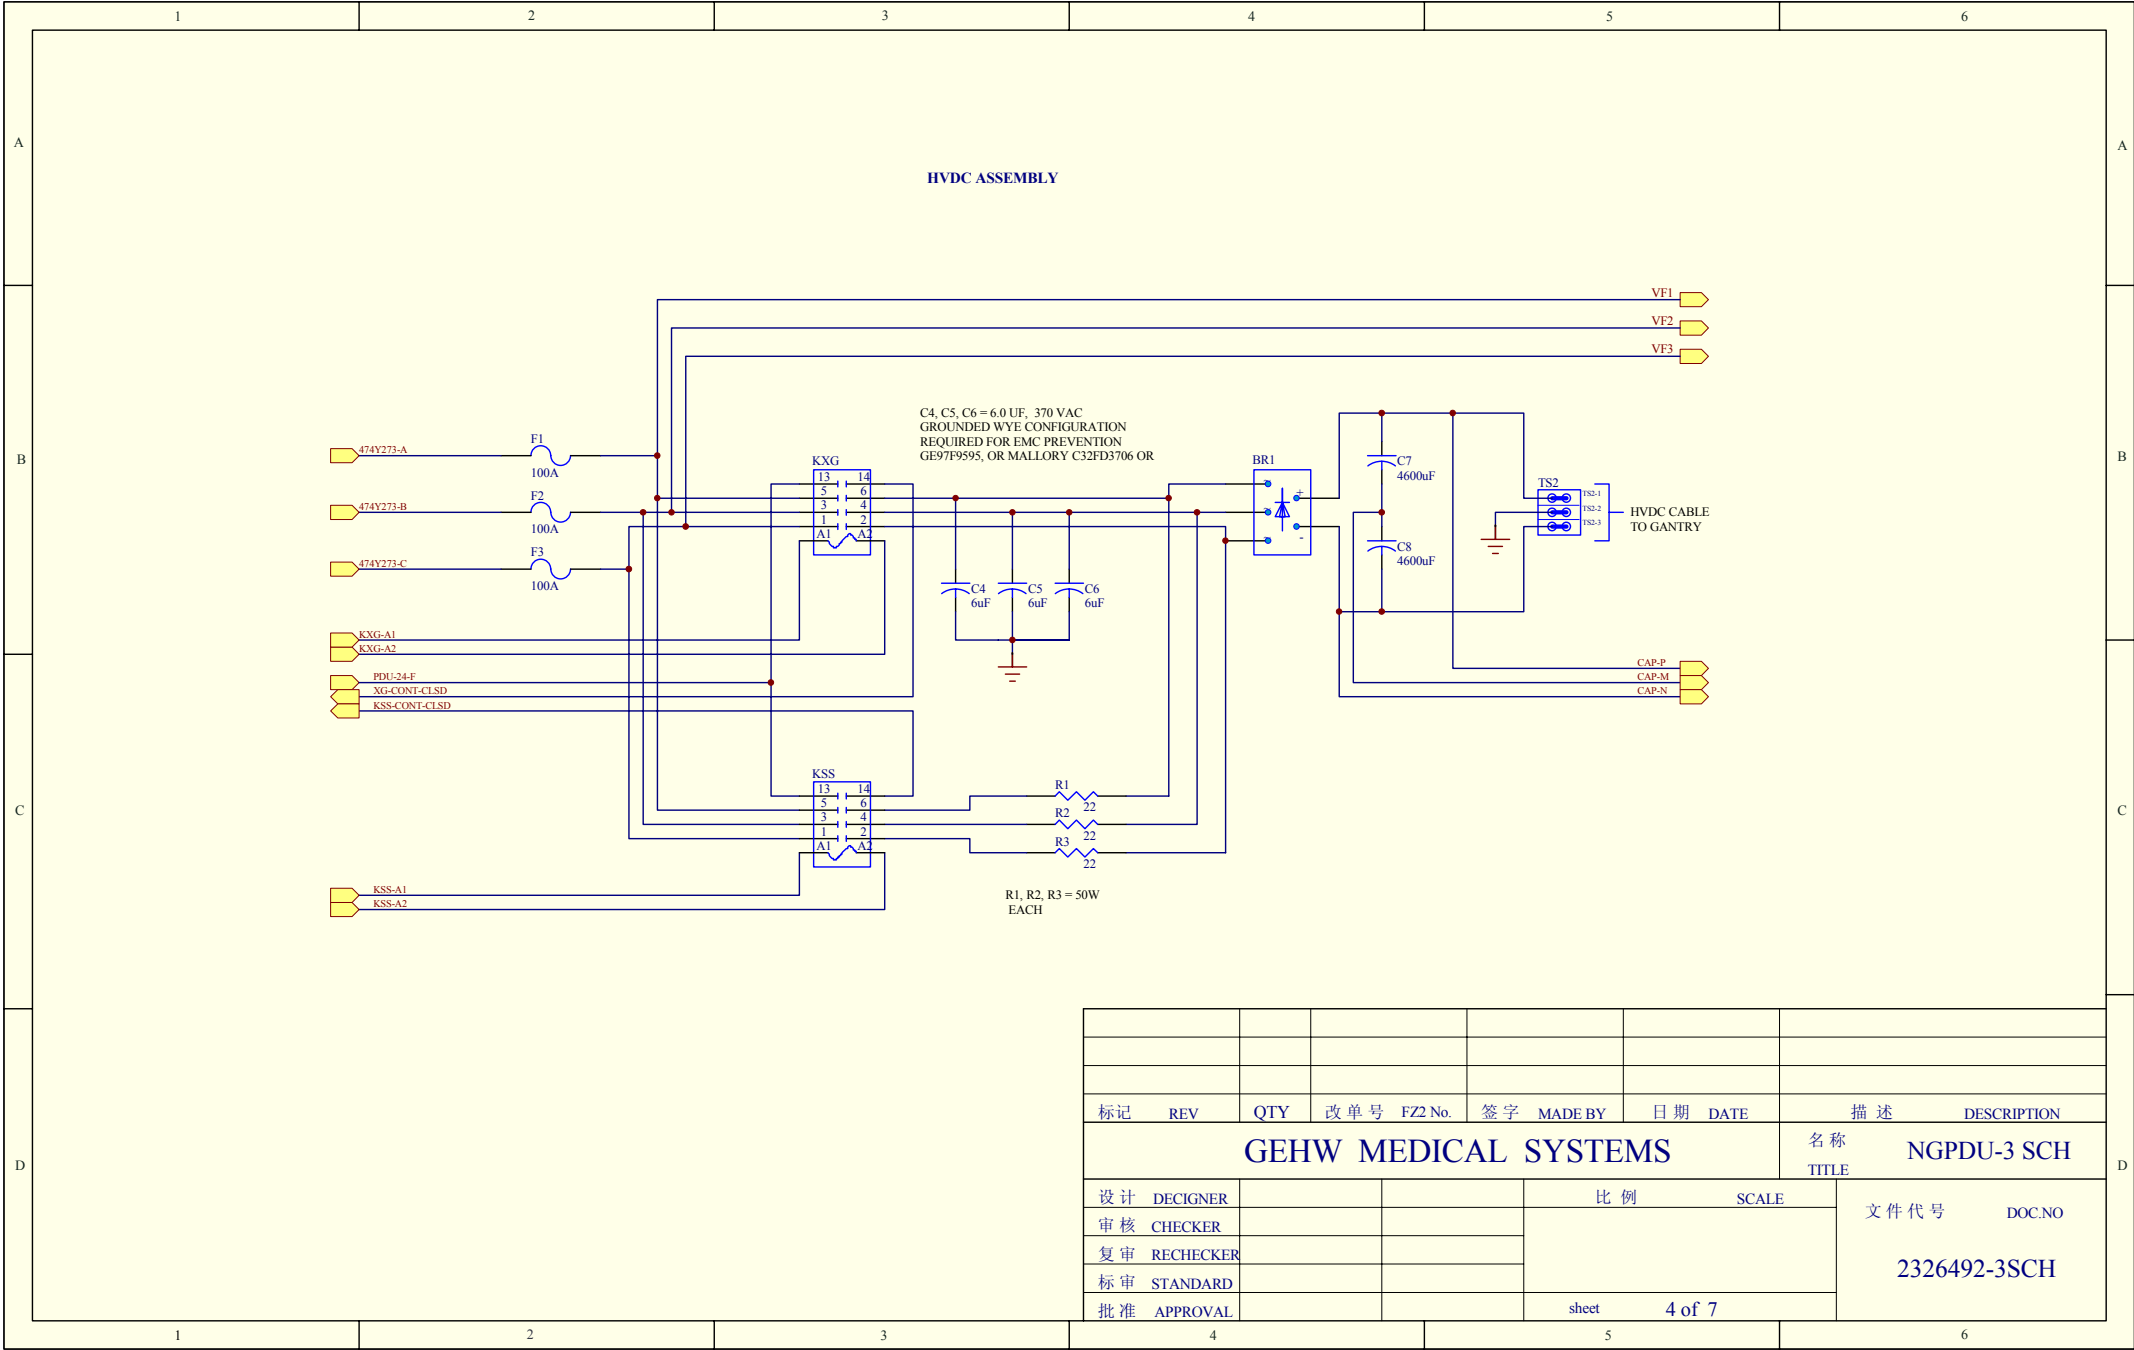

标记	REV	QTY	改单号	FZ2 No.	签字	MADE BY	日期	DATE	描述 DESCRIPTION
GEHW MEDICAL SYSTEMS								名称 TITLE	NGPDU-3 SCH
设计	DECIGNER						比例	SCALE	文件代号 DOC.NO
审核	CHECKER								
复审	RECHECKER								
标审	STANDARD								
批准	APPROVAL						sheet	4 of 7	2326492-3SCH

State: RELEASE - Document is released and under formal Change Control. Changes are subject to the ECR/ECO Process.
See the GEMS ePDM System to determine the status of this document.

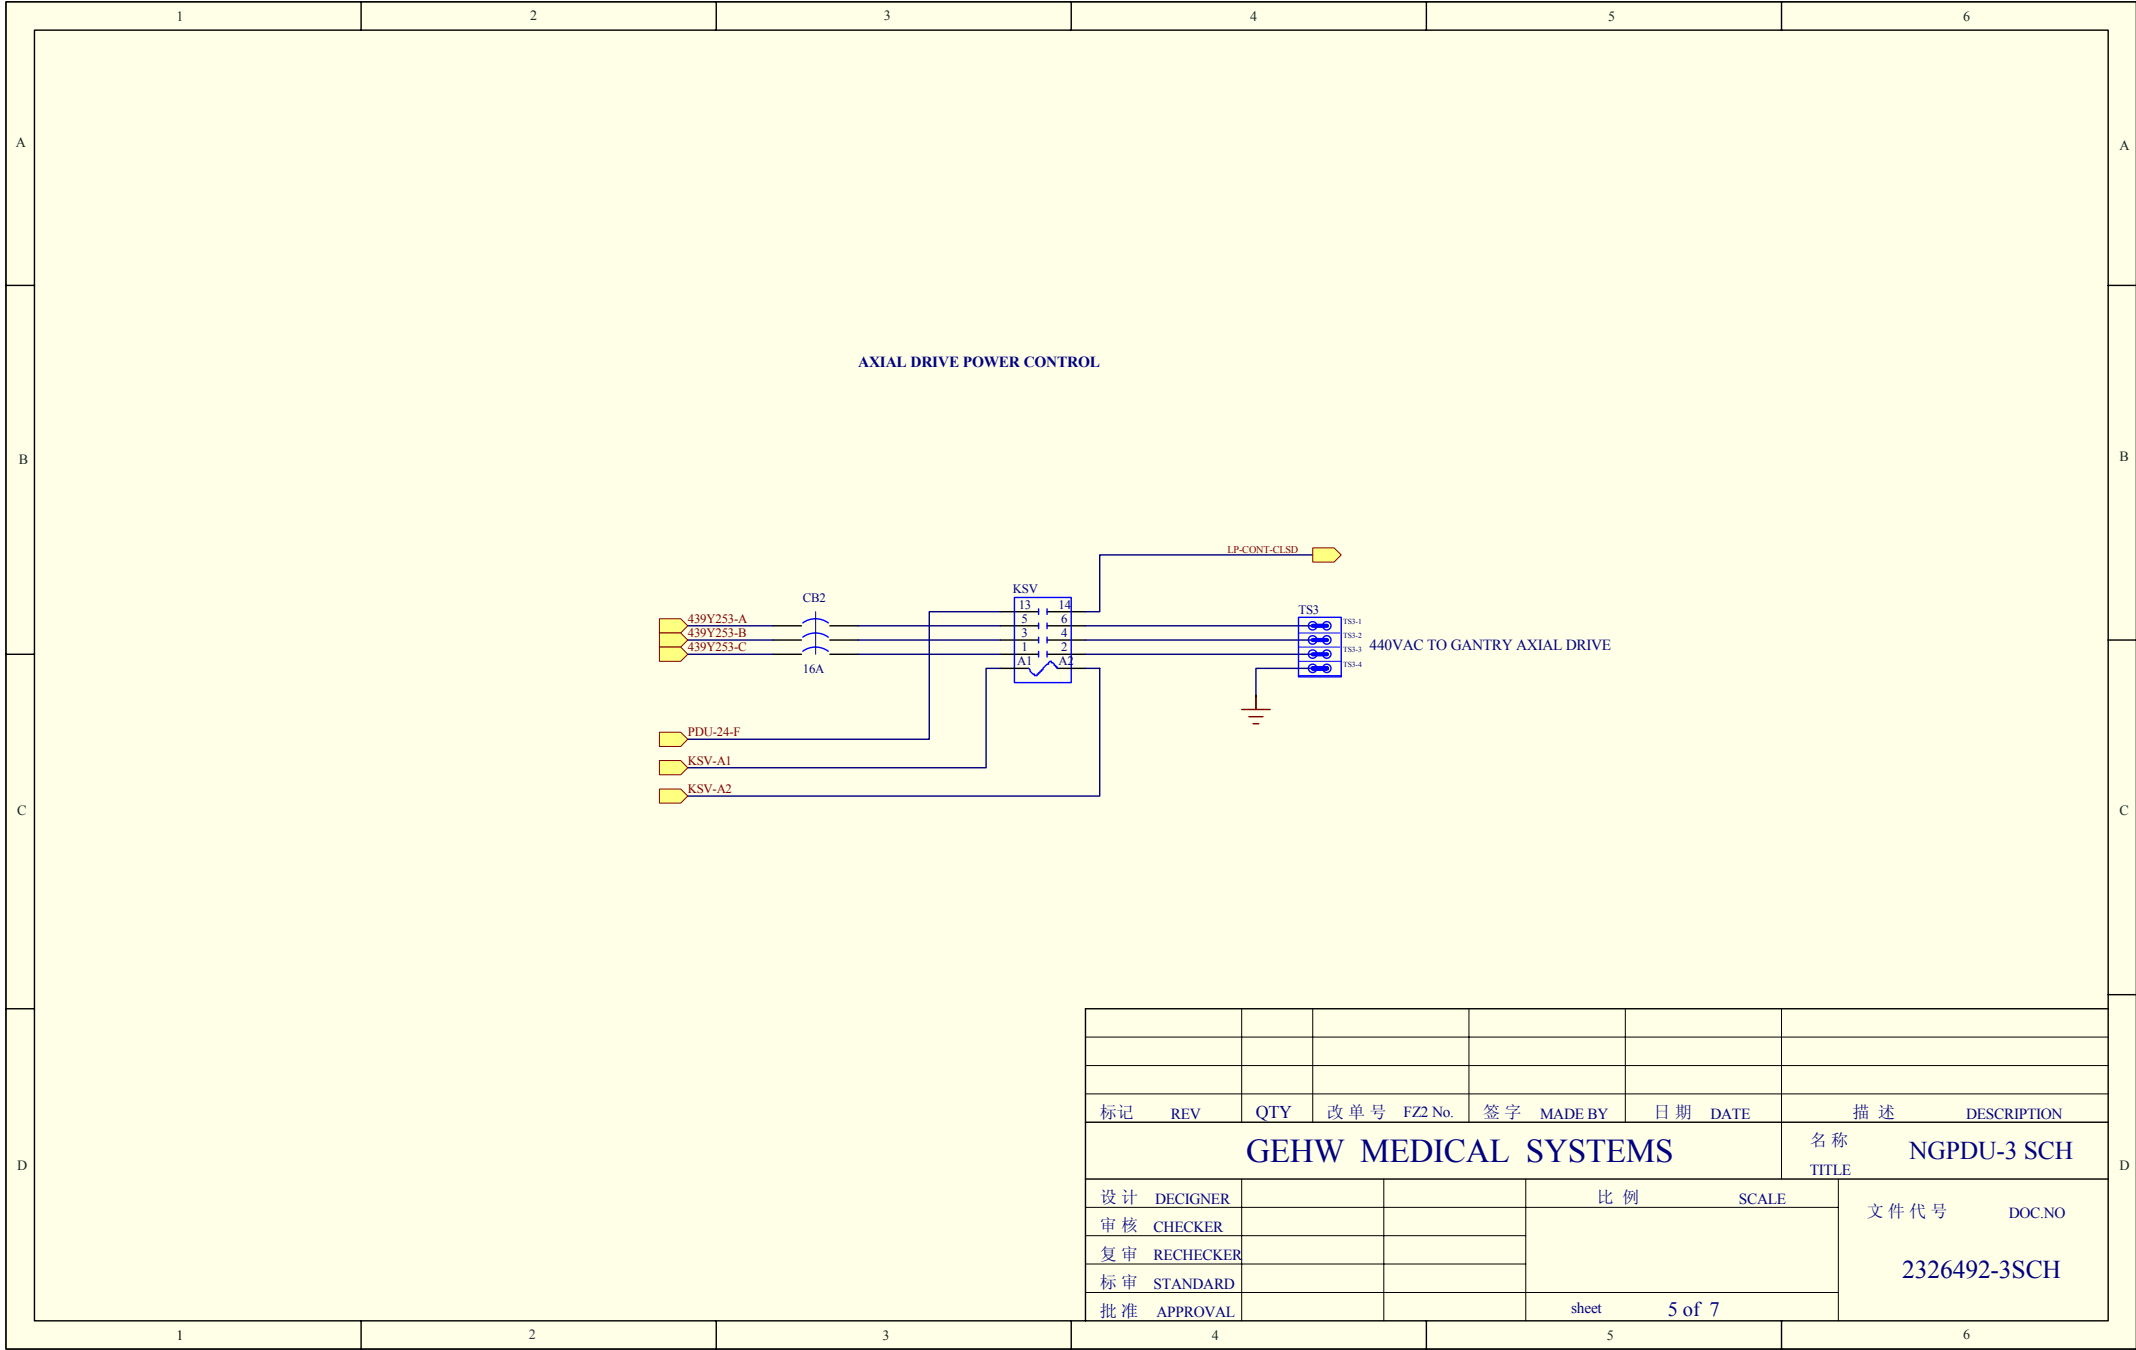

1 2 3 4 5 6

A

B

C

D

1 2 3 4 5 6

LVAC POWER DISTRIBUTION

208Y120-A
208Y120-B
208Y120-C
40A

CB3

TS4

TS4-1
TS4-2
TS4-3
TS4-4
TS4-5
TS4-6
TS4-7
TS4-8
A
B
C

120V-A
120V-B
120V-C

CB9
4A

CB7
20A

CB6
16A

CB8
32A

CB5
40A

CB4
10A

GANTRY POWER CONTACTOR

KTG

13
5
3
1
A1

14
6
4
2
A2

120F

0VAC

TS5

TS5-1
TS5-2
TS5-3

CONSOLE POWER

TS5

TS5-4
TS5-5
TS5-6
TS5-7
TS5-8

CT GANTRY POWER

TS5

TS5-9
TS5-10
TS5-11

PET GANTRY POWER

NEUTRAL

GROUND

X0

Y0

UPS POWER INTERFACE

PDU SHIPPED WITH JUMPERS
IN PLACE AS SHOWN.

TO CONNECT TWO PHASE UPS (CT ONLY):

- 1 - REMOVE JUMPERS "A" & "C"
- 2 - CONNECT INPUT POWER TO UPS TO 1 AND 3
- 3 - CONNECT UPS OUTPUT POWER TO 6 AND 8
- 4 - CONNECT INPUT & OUTPUT NEUTRAL & GROUND

KTG-P24
KTG-A1
KTG-A2
GANTRY-PWR CLSD

State: RELEASE - Document is released and under formal Change Control. Changes are subject to the ECR/ECO Process.
See the GEMS ePDM System to determine the status of this document.

