TPPA PAYMENTS

Kiosk custodian guide

Looking after a TPPA kiosk in staff mode: cash collection, paper, faults and the day's figures.

For: Kiosk custodians, and branch managers and admins who service kiosks

Version 1.0 · 2026-11-10

The screenshots come from a demonstration system: every name, account, amount and code in them is made up.

Contents

1 About this guide

What a custodian can and cannot do

In the console

2 Getting started: staff mode

Opening the service door

Signing in

Signing out

3 The staff menu

4 Collecting the cash

5 Loading paper

6 Reprinting a receipt or credit slip

7 Today: figures, the day end and readings

8 Testing the acceptors

9 Taking the kiosk out of service and bringing it back

Head office's own out of service

10 Faults and what to do

11 What is recorded and reported to head office

12 A kiosk that was reset or is not recognised

13 Safety and good practice

14 When something is not right

15 Quick reference

1. About this guide

A kiosk custodian looks after the self-service kiosks of their branch: collects the cash, loads paper, clears faults, reprints a receipt or credit slip, and takes a kiosk out of service when it must stop. All of this is done at the kiosk, in **staff mode**, behind the locked service door.

How customers pay at a kiosk, and every screen they see, is in the **Kiosk guide**. Read it first if you have not: you will often be asked about it.

The screenshots come from a demonstration kiosk (Kiosk 05 at Main Branch 0001, custodian Marco Dela Cruz, branch manager Lea Garcia): every name, amount and code in them is made up.


What a custodian can and cannot do

A custodian can	A custodian cannot
Open staff mode at the kiosks of their own branch	Sign in at a kiosk of another branch
Collect the cash (swap the cash box)	Count the box: the office counts it, never its collector
Load paper and print a test	Take payments: staff mode takes none
Reprint today's receipts and credit slips	Reprint older ones (a counter or head office does)
See today's figures and print the X- and Z-reading	Close the day: the kiosk does it at midnight
Test the acceptors and check the faults again	Bring back a kiosk that **head office** took out of service
Take the kiosk out of service and bring it back	Change the kiosk's settings (head office does)
See the Kiosks page of the console, read-only	Count a box, record one from a slip, or take a kiosk out of service in the console

Branch managers (for their own branch) and admins can do everything in staff mode that a custodian can. Tellers cannot sign in at a kiosk.

In the console


A custodian can also sign in to the web console (how to sign in is in the **Overview and first steps** guide). The menu has only two pages: **Overview** and, under Daily work, **Kiosks**.

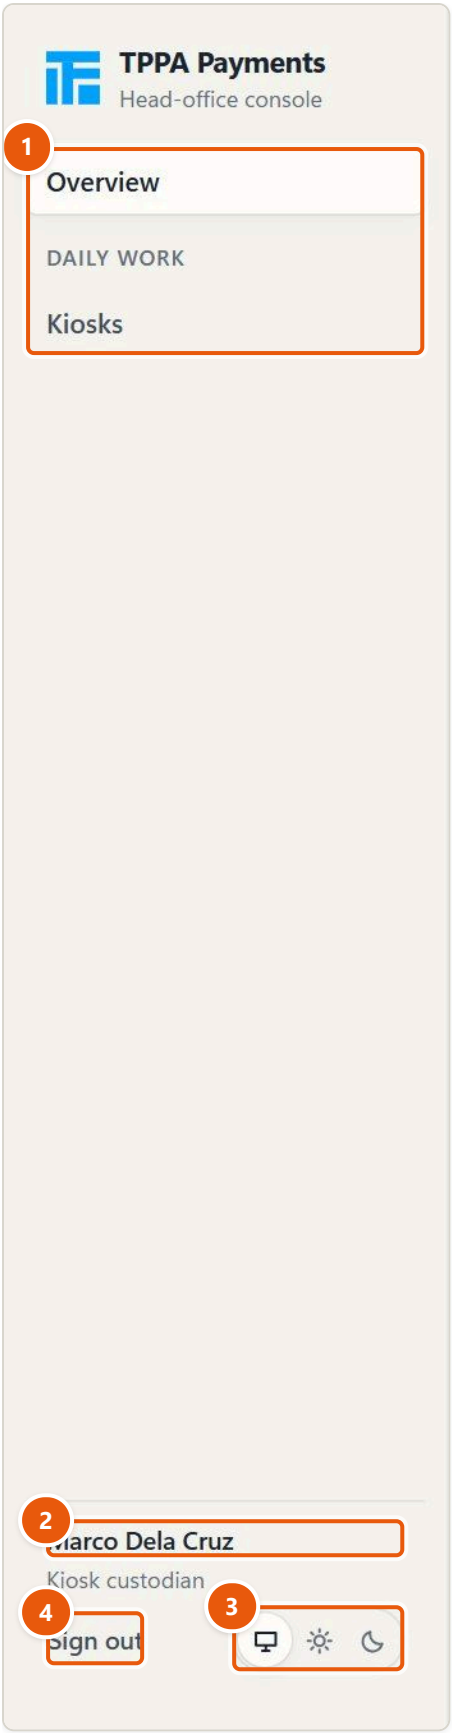

1. The menu: only the pages your role may use
2. Who is signed in, and the role
3. Light, dark or as this computer
4. Sign out

The menu of a kiosk custodian.

The **Overview** has no daily figures for this role (1). Under "Needs your attention" (2) it lists your branch's kiosks that need someone: a kiosk out of service, a kiosk offline (not synced for more than 10 minutes), a cash box to collect (at 75 % of its limit), and collected boxes waiting for the office count.

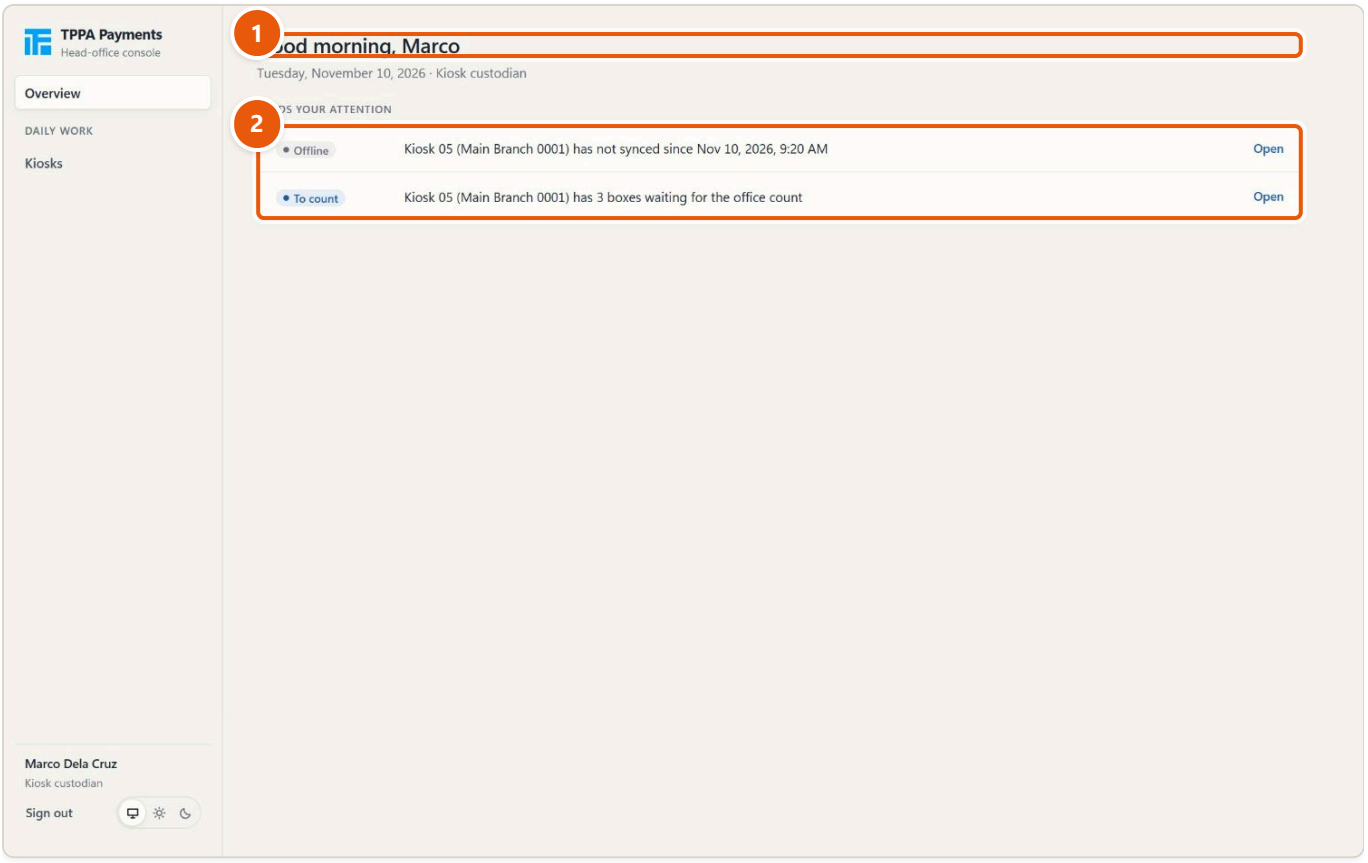


1 No daily figures for this role

2 Your kiosks

Overview as a kiosk custodian.

Kiosks shows each kiosk of your branch (1): in service or why not, the cash box against its limit (with a mark at 75 %), today's payments, the last payment, when it last synced, paper, doors and the boxes still to count. **Details** (2) opens one kiosk with the box by note and coin, the recent activity and its collections. The page is read-only for you: there is no **Take out of service** button.

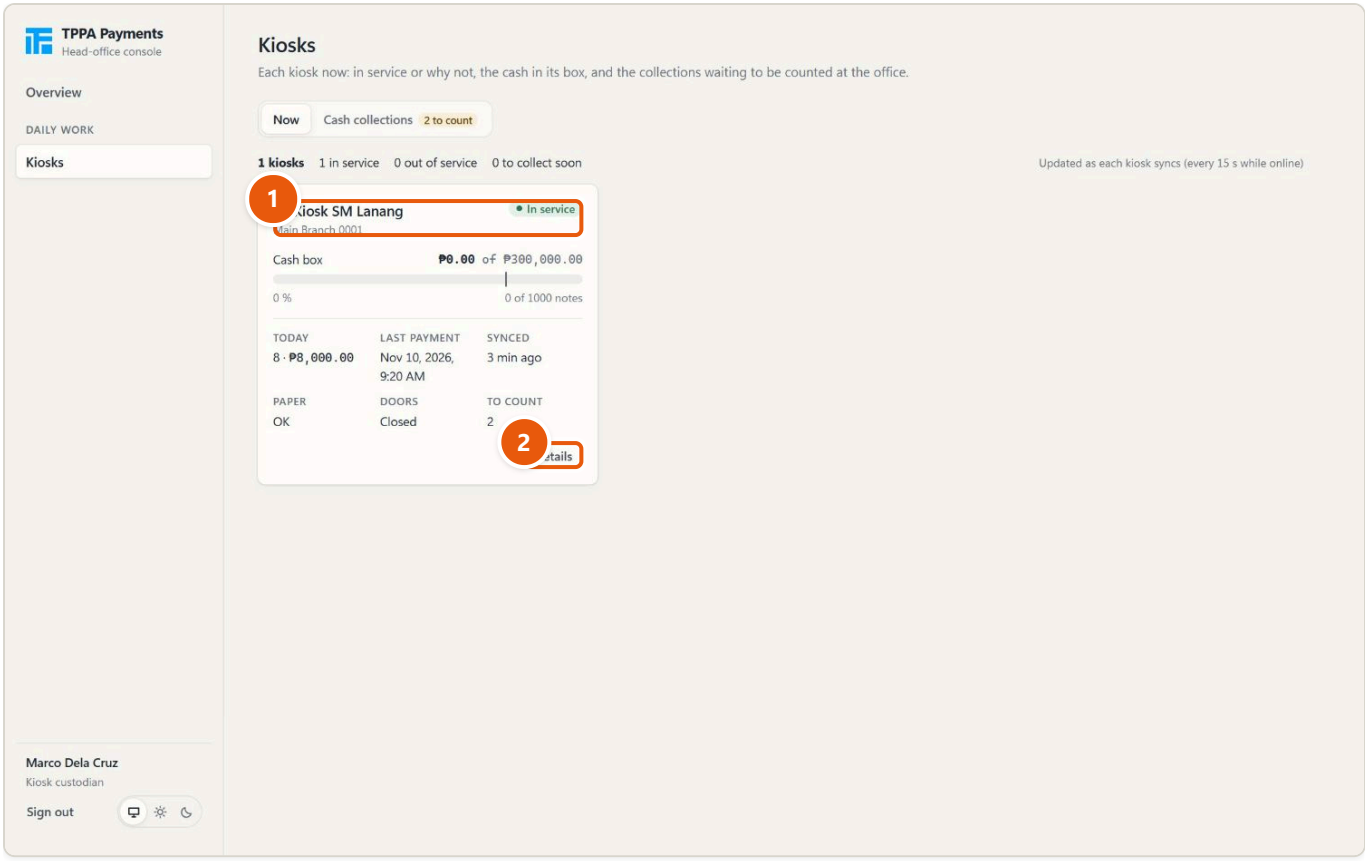


1 Your branch's kiosks only

2 Details (no out-of-service button)

Kiosks as a kiosk custodian: read only.

The **Cash collections** tab lists every box collected, with who collected it (1), the amount expected and, once the office has counted it, the count and any difference. The office counts them (2): you have no **Enter the count** or **Record from a slip** button.

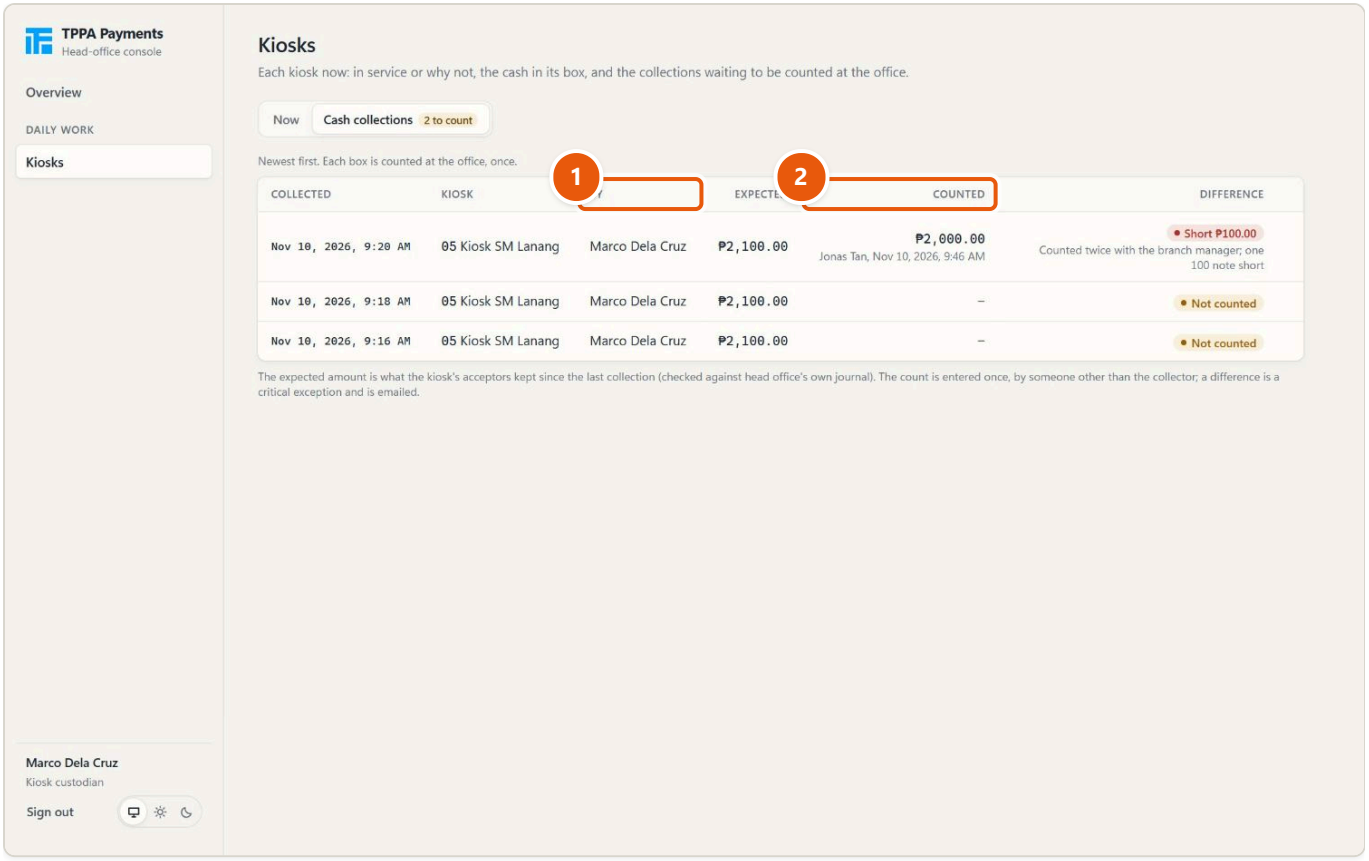

1 Collected by: you

2 The office counts them

The custodian sees the collections, but cannot count or record them.

2. Getting started: staff mode

Opening the service door


Staff mode opens **only** while the kiosk's **service door** is open. There is no hidden button on the customer screen. While the door is open the kiosk takes no payments and the screen shows "Staff mode" and "Service door open".

1. Check that no customer is using the kiosk. Opening the service door switches the screen to staff mode at once.
2. Unlock and open the service door. The sign-in screen appears.

The kiosk has a second door, the **cash door**, in front of the cash box. Open it only after you have signed in (see "Collecting the cash"): opening it with nobody signed in is a critical alert at head office.

Signing in


Sign in with **your own** username and password, never someone else's.

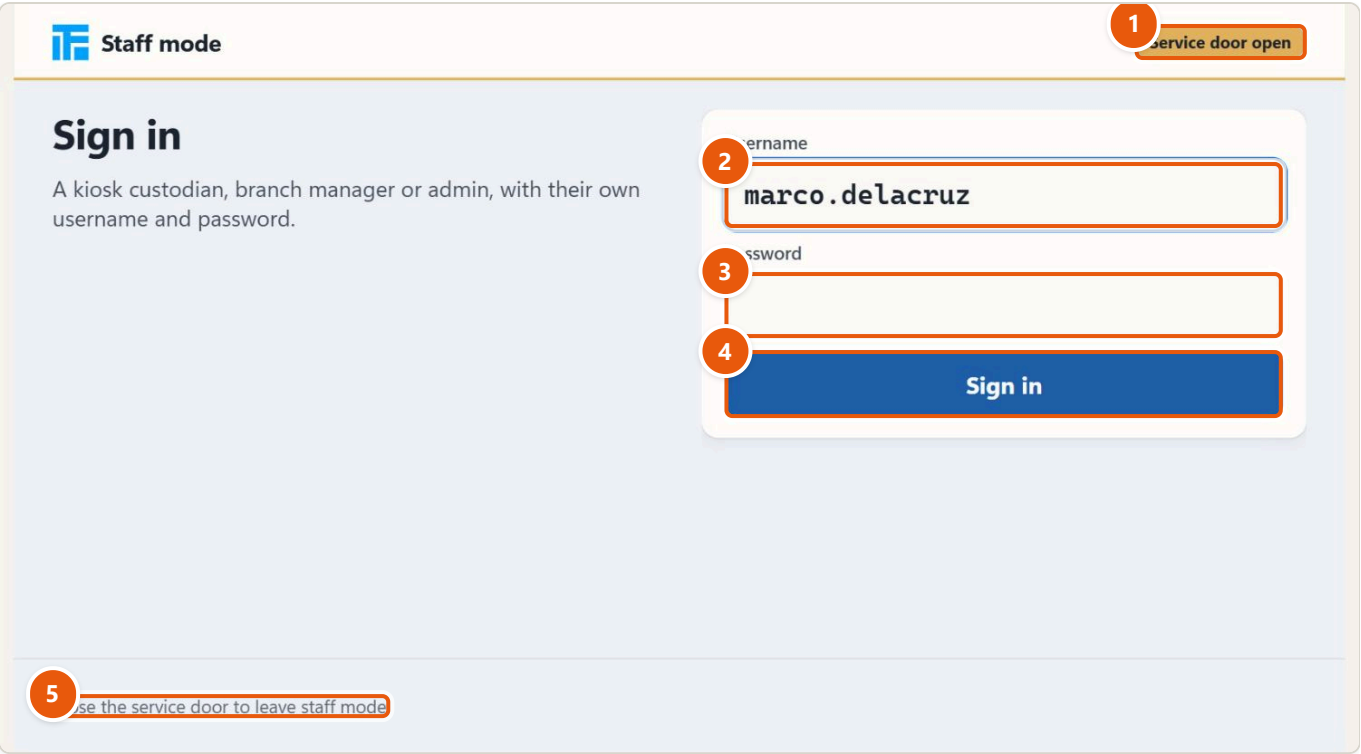

1. Service door open: staff mode
2. Your own username
3. Your password
4. Sign in
5. Close the door to leave

1. Type your **Username** (2) and **Password** (3).
2. Tap **Sign in** (4). The staff menu opens.

Who may sign in: "A kiosk custodian, branch manager or admin, with their own username and password." Custodians and branch managers only at the kiosks of **their own branch**; admins at any kiosk. Anyone else is refused with "Only kiosk custodians, the branch manager of this branch and admins can sign in here.", for example a teller:

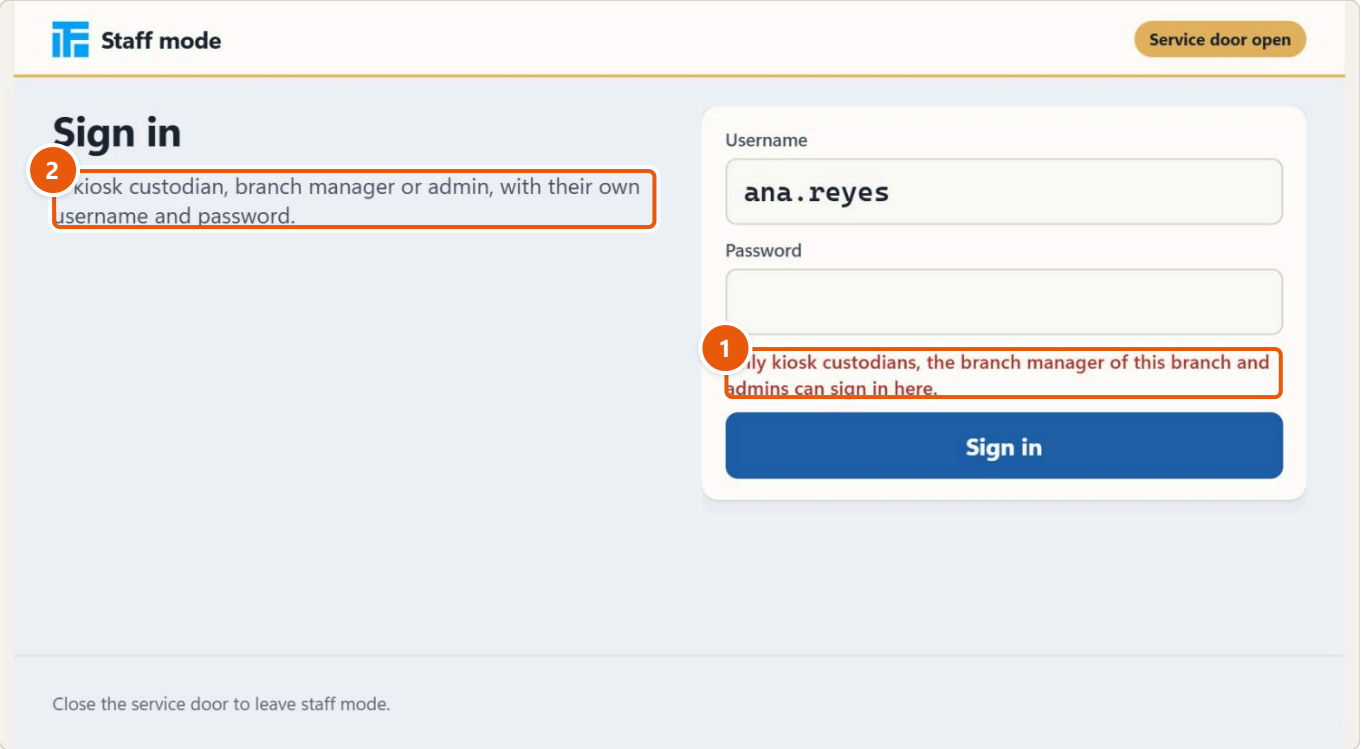

1 A teller is refused

2 Who may sign in

The sign-in is checked by head office. When the kiosk is offline, a custodian or branch manager who signed in at this kiosk while it was online can still sign in (as at a teller counter); an admin cannot sign in offline.


Signing out

Close the service door to leave staff mode: "Close the service door to leave staff mode." The kiosk signs you out within a second and goes back to customers (or to "Out of service" if something still needs fixing). **Sign out** in the footer signs you out with the door still open, for example to let a colleague sign in.

Every task is refused with the door closed or nobody signed in.

3. The staff menu


After signing in you see the menu:

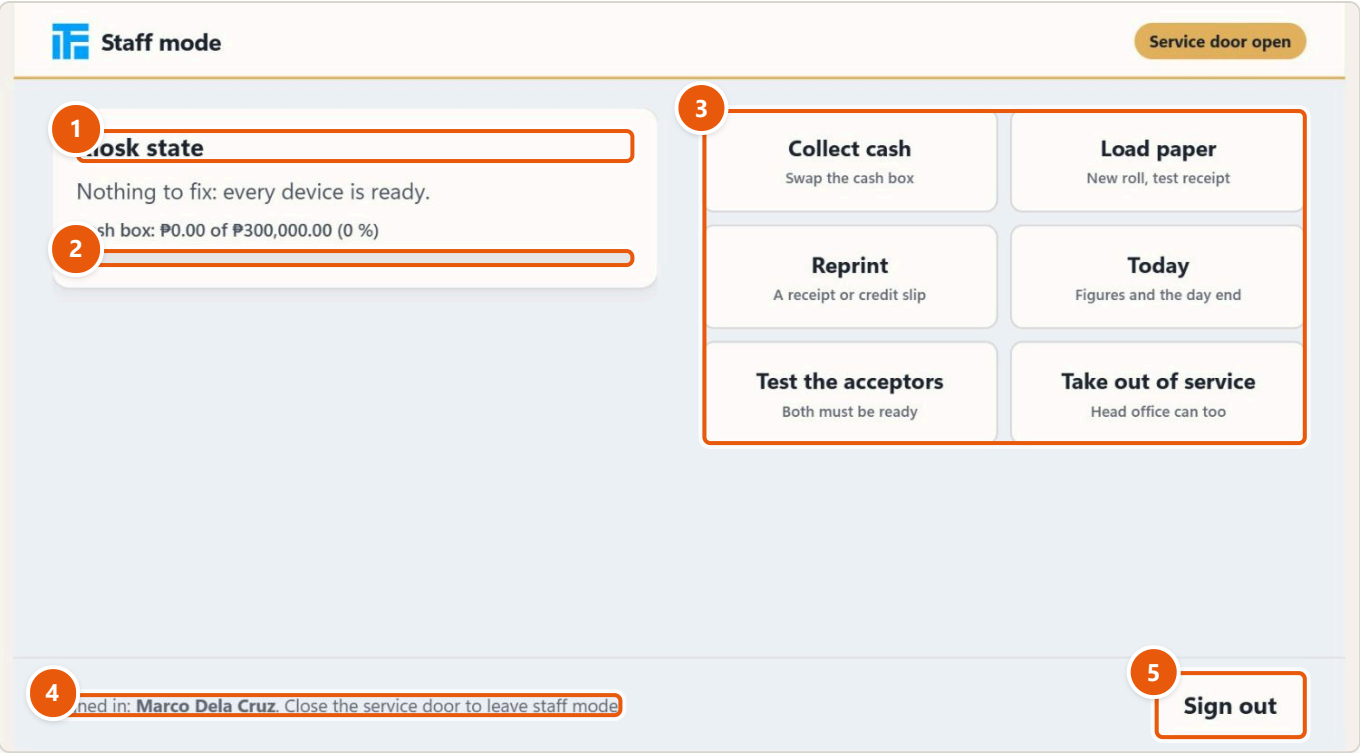

1. What needs fixing, or the kiosk state
2. Cash box meter
3. The six tasks
4. Who is signed in
5. Sign out

- **Kiosk state** (1): "Nothing to fix: every device is ready." When something needs fixing, this becomes **What needs fixing**: each problem, with a button to fix it (see below).
- **The cash box meter** (2): "Cash box: ₱0.00 of ₱300,000.00 (0 %)": the cash in the box against its limit. The bar is green, amber from 75 % and red from 90 %.
- **The six tasks** (3): **Collect cash** (Swap the cash box), **Load paper** (New roll, test receipt), **Reprint** (A receipt or credit slip), **Today** (Figures and the day end), **Test the acceptors** (Both must be ready) and **Take out of service** (Head office can too).
- **Who is signed in** (4), and **Sign out** (5).

When there are problems, each one is listed with its own button: here the paper is near its end (**Load paper**) and the cash box is at its limit (**Collect cash**).

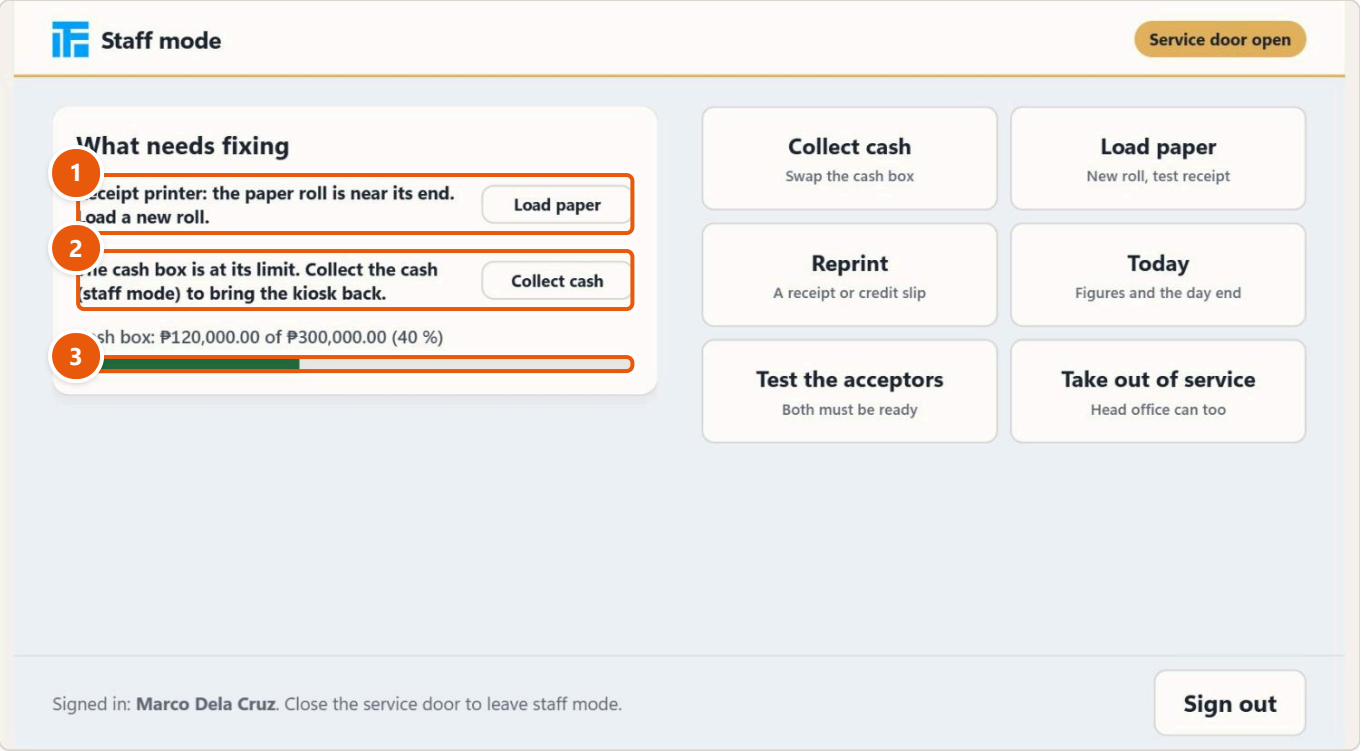


1 A fault and its fix
2 Another fault and its fix
3 Cash box meter

The cash box here is at 40 % of its money limit but full in notes: the kiosk also stops at 90 % of the notes the box holds. "Faults and what to do" lists every problem.

4. Collecting the cash


Collect the cash when the box is getting full (head office is told at 75 % of the limit), when the kiosk says "The cash box is at its limit", and as your branch schedules it. The kiosk counts every note and coin it keeps; at collection it says what the box should hold, and the office counts the box to check it.

1. On the menu, tap **Collect cash**. The screen lists what is in the box, counted by the acceptors, note by note and coin by coin (2), and the **Expected** total (3).

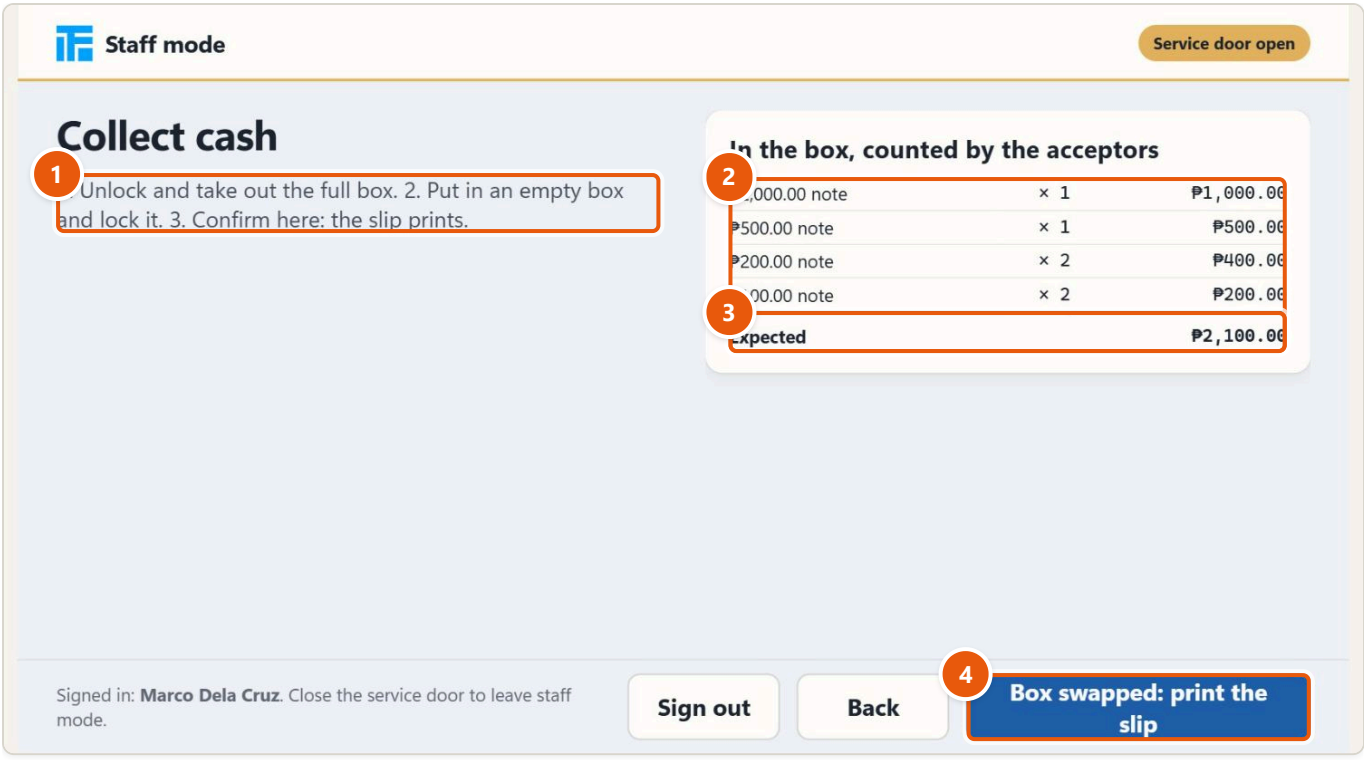

1. Swap the box: three steps
2. In the box, by note and coin
3. Expected total
4. Box swapped: print the slip

2. Open the cash door. Unlock and take out the full box.
3. Put in an empty box and lock it. Close the cash door.
4. Tap **Box swapped: print the slip** (4). The collection slip prints, and the screen says "Cash collected" with "Collected: ₱2,100.00 expected. Put the slip in the box's bag." (2)

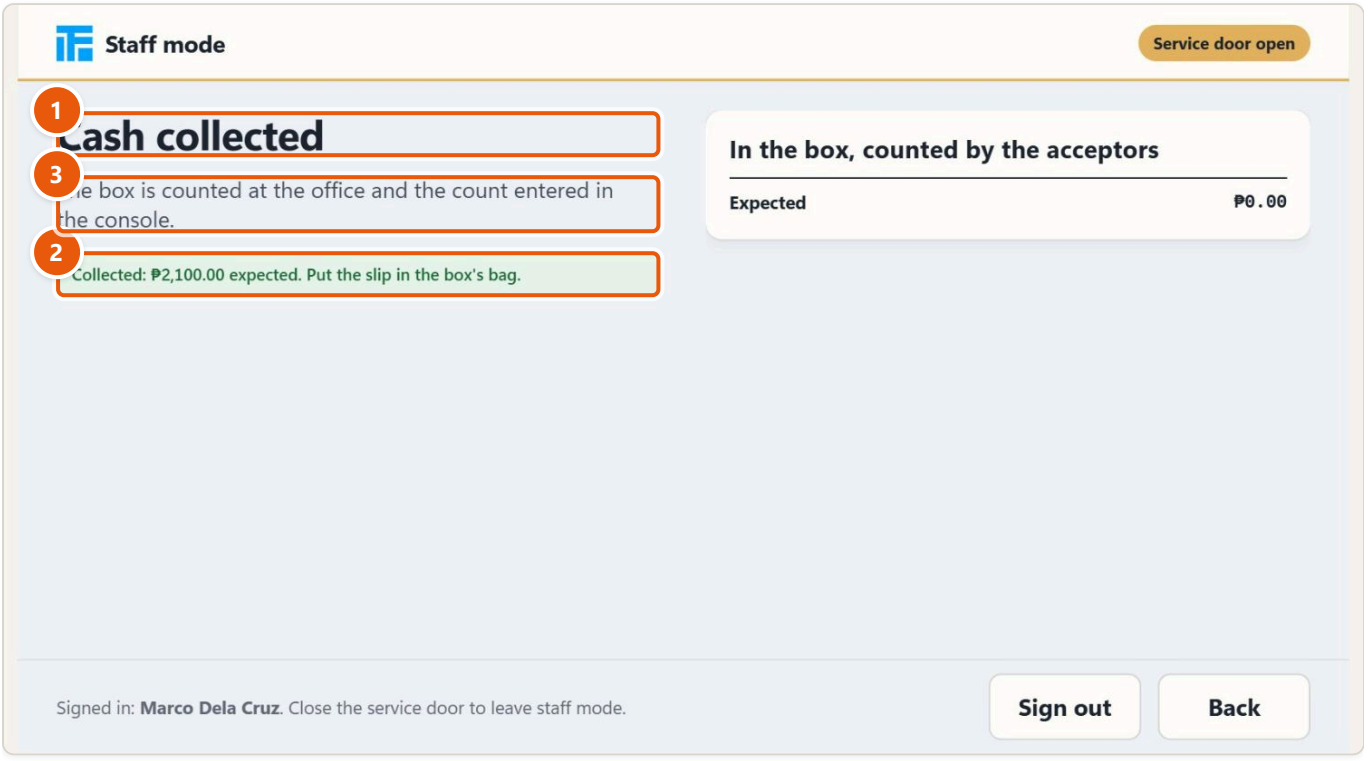

1. Cash collected
2. Put the slip in the bag
3. The box is counted at the office

5. Put the slip in the box's bag, seal it and take it to the office, as your branch does.

The kiosk's count of the box starts again from zero (the screen now shows Expected ₱0.00, and the meter 0 %). A kiosk that stopped because the box was full comes back into service by itself.

Box swapped: print the slip is greyed out while the box is empty: there is nothing to collect.

The slip:

```
TRANS PILIPINAS
Power & Automation Inc.
Building 1, Quimpo Compound
Jail Road Maa, Davao City, Philippines
VAT REG. TIN 120001
Tel. (082) 233-4688  www.tppainc.com
Main Branch 0001  Kiosk 05  SN KSK-22-0418
--------------------------------------------
CASH COLLECTION
NOT AN OFFICIAL RECEIPT
--------------------------------------------
Date           : Tue Nov 10 2026 09:21:24
Kiosk          : 05  Main Branch 0001
Collected by   : Marco Dela Cruz
Expected in box: 2,100.00

Count the cash box at the counter. A difference
is reported to head office.
--------------------------------------------
Thank you for paying at TPPA.
```

If the slip does not print, the screen says "The slip did not print: note the amount on the bag." Write the expected amount on the bag.

What happens next. The collection reaches head office with the kiosk's next sync: who collected, the expected amount and the notes and coins. Head office checks it against its own record of the cash the kiosk took. At the office, Accounting (or an admin) counts the box note by note and enters the count in the console, once. **Someone other than you** counts it. A count that differs from the expected amount is a critical exception, emailed to head office.

5. Loading paper

Load a new roll when the kiosk says the paper is near its end or out, and whenever the roll is low.

1. On the menu, tap **Load paper**: "Load a new 80 mm roll, close the printer, then print a test receipt." (1)
2. Open the printer, load a new 80 mm roll and close the printer.
3. Tap **Roll loaded: print a test** (2). A test slip prints: the receipt header, "TEST PRINT", the date and time, and "New roll loaded. Not a receipt.". The screen says "Test printed. Check the header and the cut." (3)
4. Check the test slip: the header is readable and the paper was cut. Then **Back** (4).



1. Load a new 80 mm roll
2. Roll loaded: print a test
3. Check the test print
4. Back to the menu


If the test does not print: "The test did not print. Check the roll and the printer cover." Check that the roll is the right way round and the cover is shut, and print the test again.

A kiosk with paper near its end stops taking new customers, but a receipt already paid still prints.

6. Reprinting a receipt or credit slip

When a customer's receipt or kiosk credit slip did not print, or the customer lost it **today**, you can print a copy.

1. On the menu, tap **Reprint**. The list (1) shows today's receipts and credit slips, newest first: for a receipt the OR number, the name and account (2); for a credit slip its code and "Not an official receipt" (3); each with the amount.
2. Tap **Reprint** (4) on the line. The copy prints marked **REPRINTED**, and the screen says "Printed: OR 0001-05-00000008, marked REPRINTED." (5) For a credit slip: "Printed: credit slip KC-434U-VGR9, marked REPRINTED."

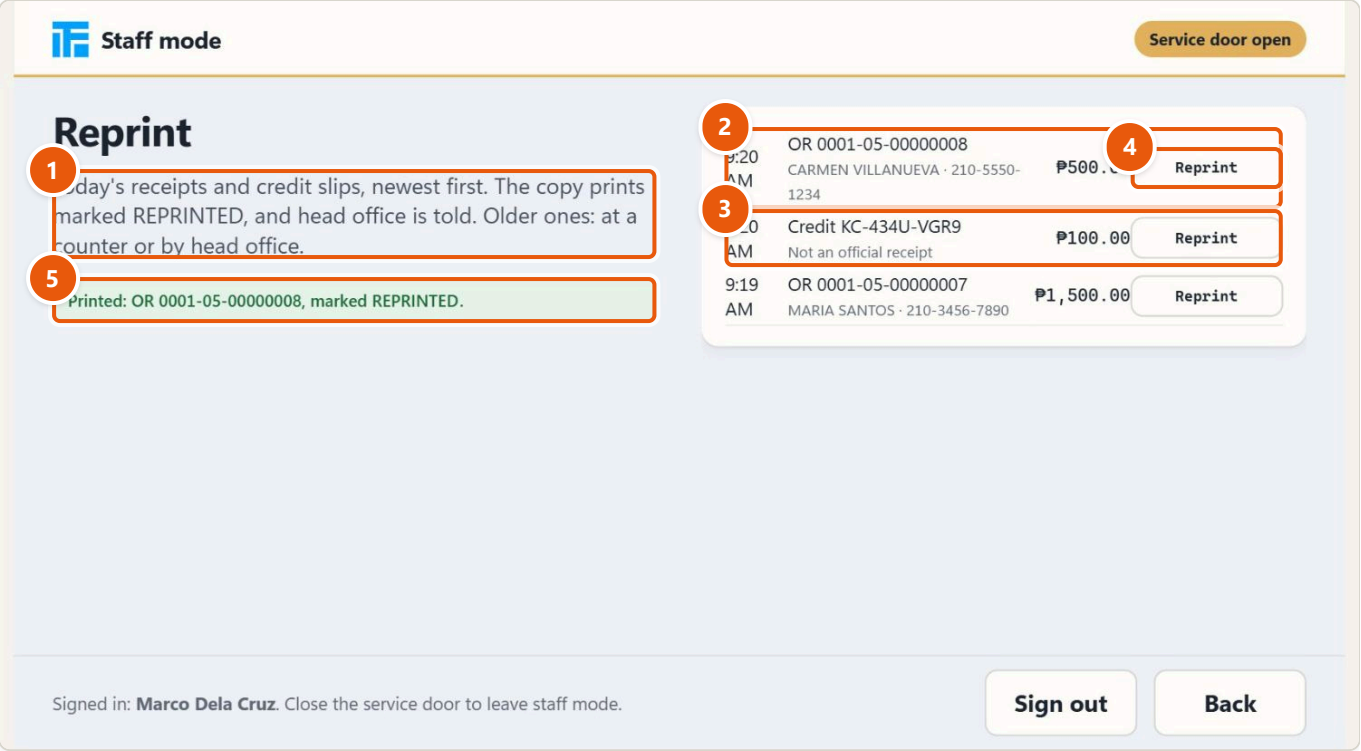


1. Today's receipts and credit slips
2. A receipt: OR, name, account, total
3. A credit slip
4. Reprint
5. Printed, marked REPRINTED

Every reprint is recorded and head office is told. Only today's are reprinted here: "Older ones: at a counter or by head office." With nothing printed yet today the list says "Nothing printed at this kiosk today." If the copy does not print: "The copy did not print. Check the printer, then try again."

7. Today: figures, the day end and readings

Tap **Today** on the menu.

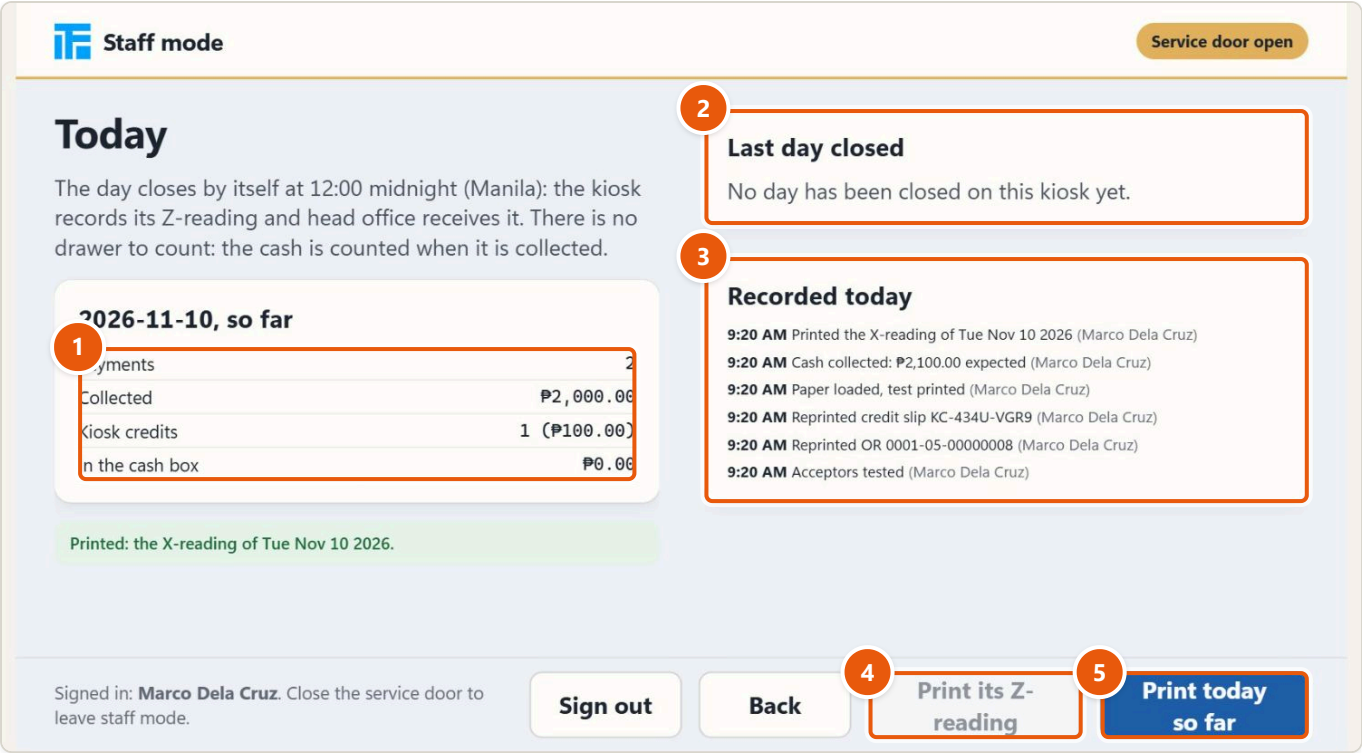

1 Today's figures
2 Last day closed
3 Recorded today
4 Z-reading of the last day closed
5 X-reading: today so far

- **Today's figures** (1): the business date, **Payments** (how many), **Collected** (the total of the payments), **Kiosk credits** (how many, and their total) and **In the cash box**.
- **Last day closed** (2): the last business day the kiosk closed, with its payments and total ("Closed at midnight, by itself."), or "No day has been closed on this kiosk yet."
- **Recorded today** (3): the latest staff actions of the day, with the time and who did them (sign-ins, collections, paper, reprints, readings, tests, out of service and back).
- **Print its Z-reading** (4): the Z-reading of the last day closed. It is greyed out while no day has been closed.
- **Print today so far** (5): the X-reading of today. The screen says "Printed: the X-reading of Tue Nov 10 2026."

The day end is automatic. "The day closes by itself at 12:00 midnight (Manila): the kiosk records its Z-reading and head office receives it. There is no drawer to count: the cash is counted when it is collected." A kiosk that was off at midnight closes the missed day when it starts, before its next payment. You have nothing to do.

The readings are "NOT AN OFFICIAL RECEIPT". In both, **Cash taken** is the payments plus the kiosk credits: all the cash the kiosk kept that day. The X-reading of the demonstration kiosk:

```
------------------------------------------------
X-READING
Today so far
NOT AN OFFICIAL RECEIPT
------------------------------------------------
Business date   : Tue Nov 10 2026
Kiosk           : 05  Main Branch 0001
First OR        : 0001-05-00000007
```


```
Last OR         : 0001-05-00000008
Payments        : 2
Voided          : 0
-----------------------------------------------
VAT Sales               :              2,000.00
Non-VAT Sales           :                 0.00
VAT Zero Related Sales:                   0.00
VAT Amount              :                 0.00
Total                   :              2,000.00
-----------------------------------------------
Kiosk credits issued    :          1 (100.00)
Cash taken              :              2,100.00
Printed         : Tue Nov 10 2026 09:21:24
-----------------------------------------------
Thank you for paying at TPPA.
```

(The header, the same as on the receipt, is left out here.) A Z-reading reads "Z-READING" and "Day closed" at the top, "Closed" with the time the day closed instead of "Printed", and ends with "Closed by the kiosk at midnight.". The Kiosk guide shows a full example.

8. Testing the acceptors

Test the note and coin acceptors after clearing a jam, or when customers say notes are refused.

1. On the menu, tap **Test the acceptors** (1).
2. Read the result (2): "Both acceptors are ready. A note inserted now is returned." (In staff mode the kiosk takes no cash: a note you insert to try it is given back.)

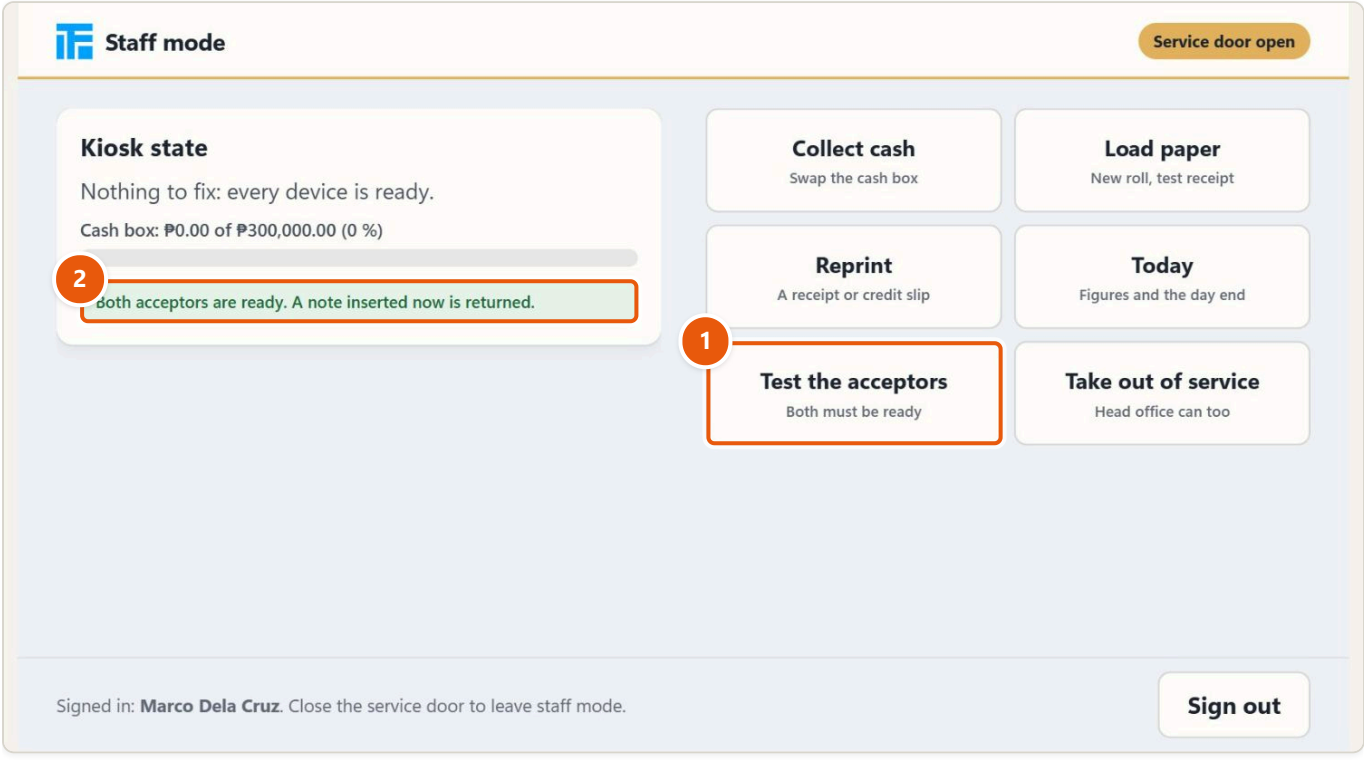

1 Test the acceptors


2 The result

If one is not ready, the kiosk says "An acceptor reports a fault:" followed by the fault's code. See "Faults and what to do".

9. Taking the kiosk out of service and bringing it back

Take the kiosk out of service when it must not take payments though nothing reports a fault: for example damage to the screen or the cabinet, a slot that is blocked, or works around the kiosk.

1. On the menu, tap **Take out of service**. The kiosk says "Out of service until brought back." (2) and the tile becomes **Bring back into service** (1). What needs fixing now shows "Marco Dela Cruz took this kiosk out of service. Bring it back in staff mode."

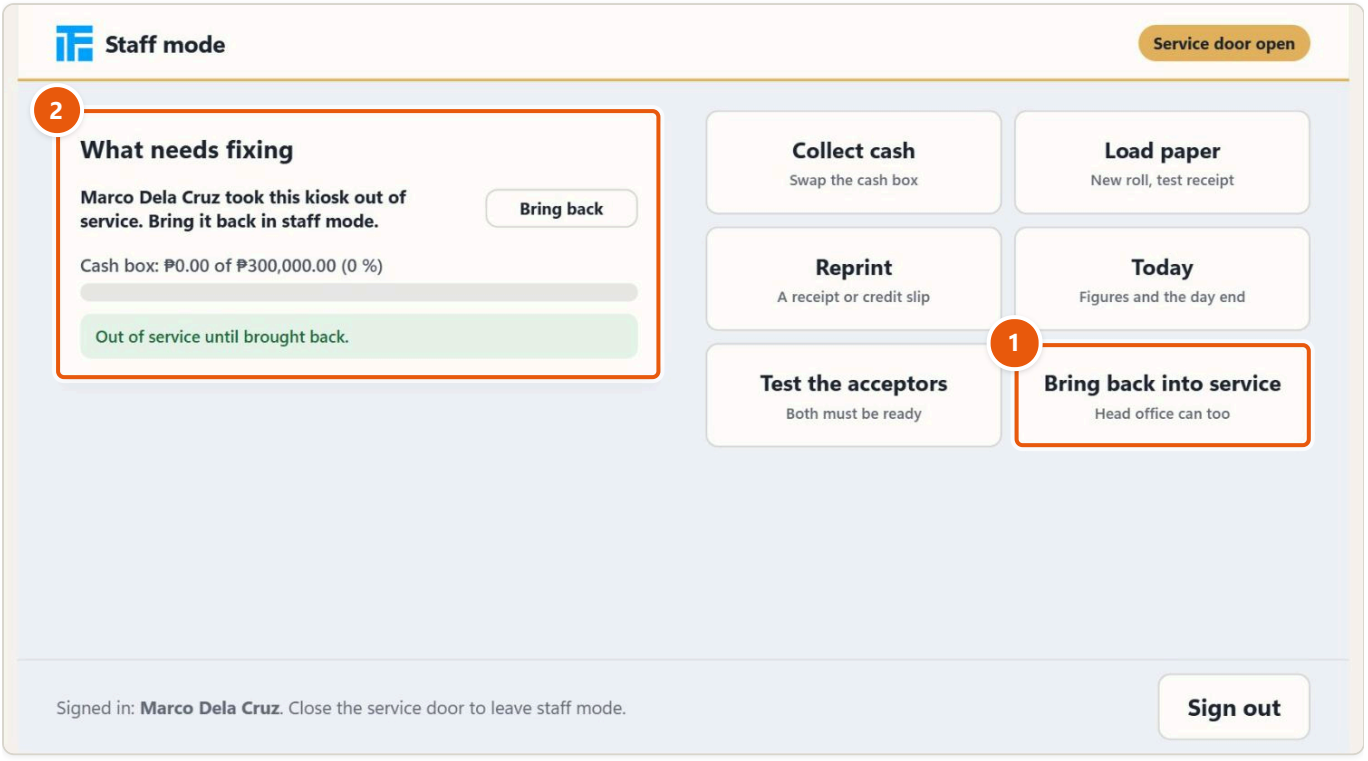

1 Now: Bring back into service

2 Out of service until brought back

2. Close the service door. Customers see "Out of service" and the nearest counter.




1. Out of service for customers
2. The nearest counter
3. Who took it out (development builds only)

On a real kiosk customers see only the heading, the text and the nearest counter. The line naming who took it out (3) is shown in the demonstration build only.

The kiosk stays out of service, even after a restart, until someone brings it back in staff mode.

To bring it back, any custodian of the branch, the branch manager or an admin signs in and taps **Bring back** (on the line in What needs fixing) or **Bring back into service** (2). It need not be the person who took it out: here the branch manager Lea Garcia (3) brings back the kiosk Marco Dela Cruz took out.

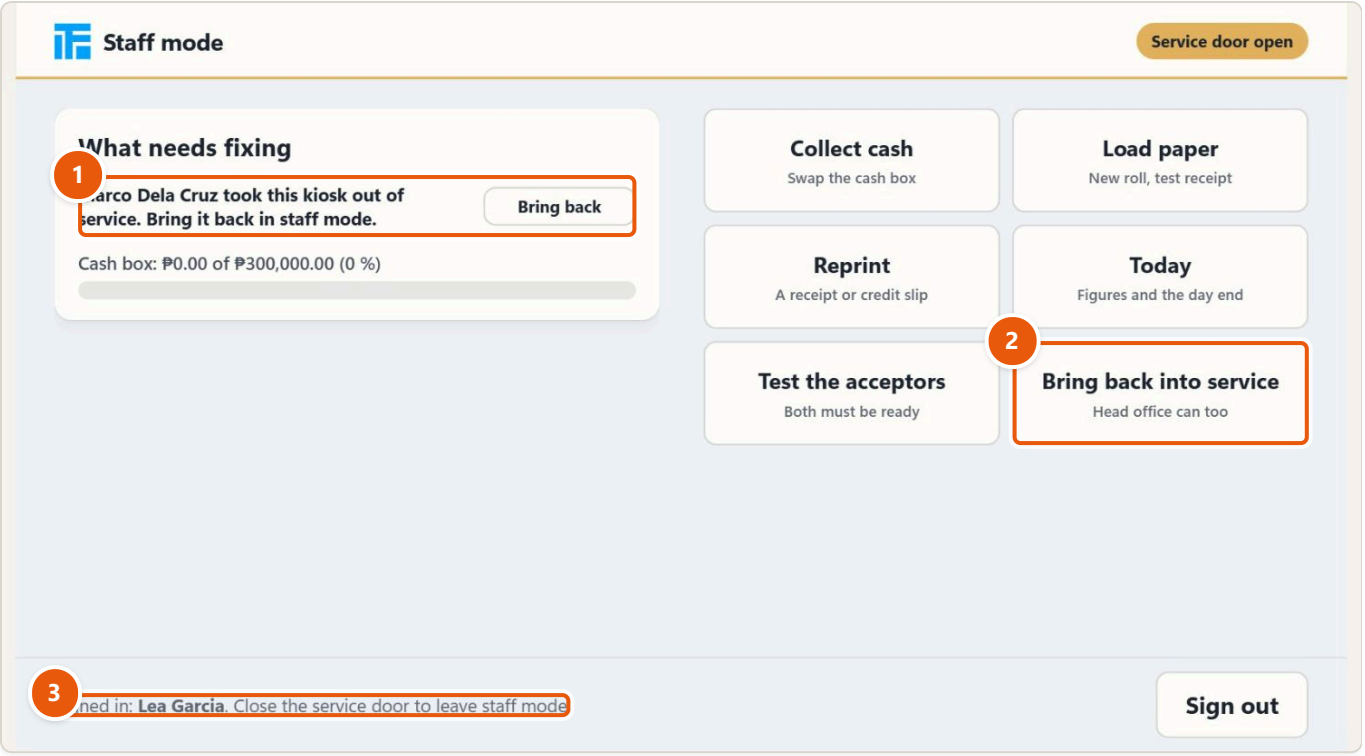


1 Who took it out, and Bring back

2 Bring back into service

3 A branch manager signed in

The kiosk says "Back in service." (1), and the tile is **Take out of service** again (2). Customers can pay as soon as you close the service door.

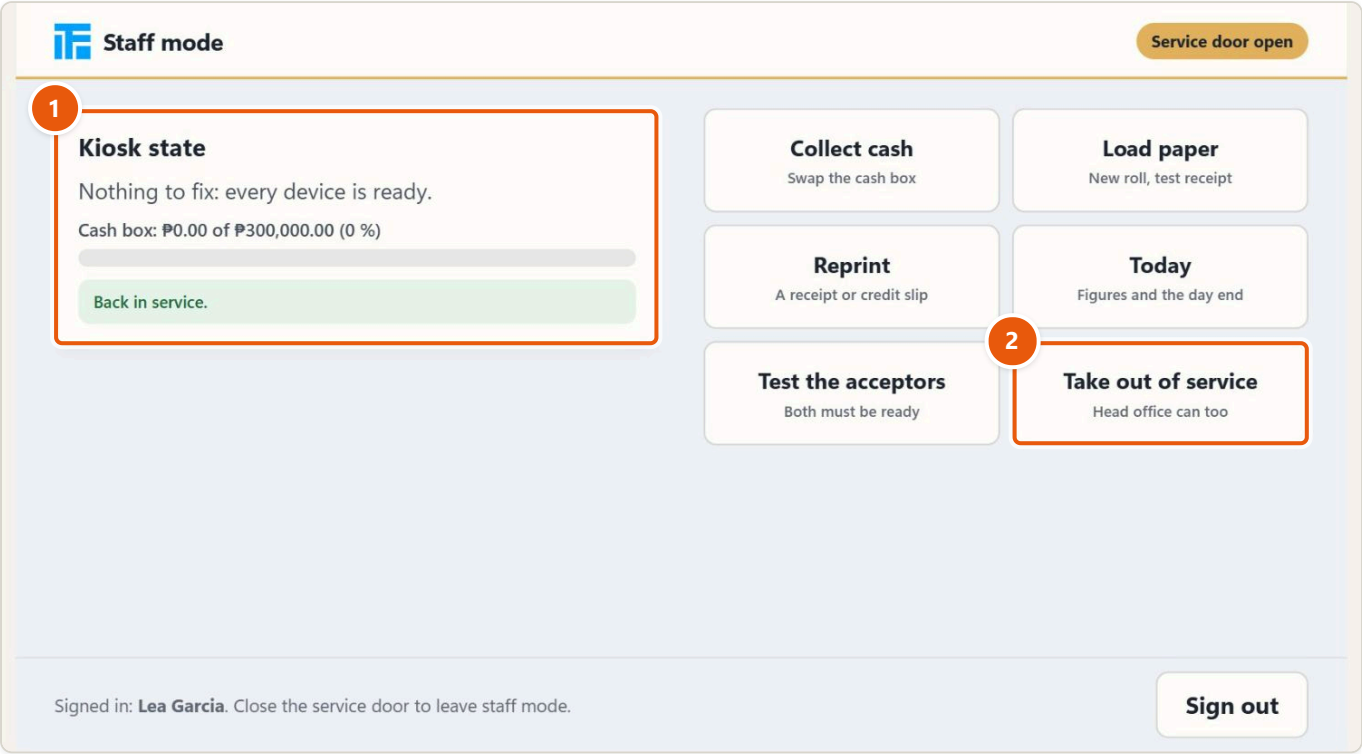

1 Back in service

2 Take out of service again

Head office's own out of service

Head office (an admin, or the branch manager in the console) can also take a kiosk out of service, with a reason. The kiosk applies it at its next sync, after any customer already paying has finished. In staff mode, What needs fixing then shows "Head office (name) took this kiosk out of service: reason. Only the console brings it back."

You **cannot** bring it back in staff mode: only the console can (an admin, or the branch manager of the branch). Your own **Take out of service** and **Bring back into service** are separate: they do not lift head office's.

10. Faults and what to do

The kiosk checks its devices all the time and goes out of service by itself while one has a problem. It comes back by itself once the problem is fixed: you do not need to bring it back. After fixing something without its own button, tap **Check again** on its line: the kiosk checks again and says "Nothing to fix: every device is ready." or "Still 1 to fix."

The kiosk says	What to do	Button
"Receipt printer: the paper roll is near its end. Load a new roll."	Load a new roll and print a test.	**Load paper**
"Receipt printer: out of paper. Load a new roll."	Load a new roll and print a test.	**Load paper**
"Receipt printer: offline or its cover is open."	Close the printer cover; check the printer's power and cable.	**Check again**
"Receipt printer: the paper is jammed."	Open the printer, remove the jammed paper, reload the roll, then print a test.	**Check again**
"Note acceptor: a note is jammed or the acceptor reports a fault."	Clear the jam as the acceptor's maker describes, then test the acceptors.	**Check again**
"Coin acceptor: it reports a fault or a coin jam."	Clear the coin jam, then test the acceptors.	**Check again**
"The cash box is at its limit. Collect the cash (staff mode) to bring the kiosk back."	Collect the cash. The limit is ₱300,000.00 (or as head office set it), or 90 % of the notes the box holds, whichever comes first.	**Collect cash**
"The cash door is open."	Close and lock the cash door.	**Check again**
"(name) took this kiosk out of service. Bring it back in staff mode."	Bring it back when the reason has passed.	**Bring back**
"Head office (name) took this kiosk out of service: … Only the console brings it back."	Nothing at the kiosk. Ask the branch manager or head office.	**Check again**
Anything else (settings not received, the clock, OR numbers, a printer not found)	Note the message and call IT or head office.	**Check again**

Examples of messages for IT: "Sync required. This terminal has not received settings for more than 36 hours, so it cannot know the current fees. Connect to the network; payments resume as soon as settings arrive." or "The computer clock is 12 minutes off. Receipts carry the date and time, so fix the clock before taking payments."

A fault never interrupts a customer who has already put cash in: that payment finishes first.

11. What is recorded and reported to head office

The kiosk records everything in its own journal and sends it to head office whenever it is online. Head office sees it on the console's **Kiosks** page.

- **Doors.** Every opening of the service door and of the cash door, with who was signed in. **The cash door opened with nobody signed in who may service the kiosk is a critical alert**: it is emailed to head office within minutes.
- **The kiosk's state.** Each time it goes out of service or comes back, with the reasons. Staff mode counts as out of service ("The service door is open (staff mode)").
- **Staff actions.** Every sign-in, collection, paper load, test, reprint, reading, check and out of service, with who did it. An action by someone who does not service this branch's kiosks is flagged.
- **Collections.** Who, when, the expected amount and the notes and coins. Head office checks the expected amount against the cash it recorded since the last collection; a difference is a critical exception. The office count follows.
- **Receipts and slips that did not print.**

Head office is also emailed **kiosk notices**: a kiosk out of service for 30 minutes, a cash box at 75 % of its limit, and a kiosk not heard from for an hour. So **close the service door when you have finished**: a door left open keeps the kiosk out of service, and head office will be told.

12. A kiosk that was reset or is not recognised

Sometimes the kiosk cannot tell head office anything: head office reset its registration (for example after its computer was reinstalled), or the server does not recognise it. Customers see "Out of service". When you open the service door, there is **no sign-in**:

"Service door open. The kiosk takes no payments while the door is open. It cannot reach head office as it is, so nobody can sign in: collect the cash here, then set it up again. Close the door to return."

The screen explains the problem: "This kiosk was reset" or "The server does not recognise this kiosk", with what IT needs. Setting the kiosk up again is for IT (see the IT and set-up guide). It cannot be set up again while the cash box holds cash: "Collect the cash first". So the cash comes out first, with a slip marked **NOT SENT**.

To collect the cash in this state:

1. Read the panel **Collect the cash**: "The box holds ₱… . Swap it for an empty box, then print the slip: it says NOT SENT, because this kiosk cannot tell head office. Sign it and give it with the box to the office."
2. Open the cash door, take out the full box, put in an empty box, lock it and close the door.

3. Tap **Box swapped: print the slip**. The panel becomes **Cash collected**: "Collected: ₱… expected. Sign the slip and give it with the box to the office: they record it from the slip."
4. **Sign the slip** on the "Collected by" line and put it in the box's bag with the box.

The slip (the date and amount are an example):

```
------------------------------------------------
CASH COLLECTION
NOT AN OFFICIAL RECEIPT
NOT SENT TO HEAD OFFICE
------------------------------------------------
Date           : Tue Nov 10 2026 09:21:24
Kiosk          : 05  Main Branch 0001
Collected by   : _________________
Expected in box: 2,100.00

This kiosk could not tell head office. Give this
slip with the box: the office records the
collection from it, then counts the box.
------------------------------------------------
Thank you for paying at TPPA.
```

(The header, the same as on the receipt, is left out here.) If the slip does not print, the panel says "The slip did not print: write the amount, the date and your name on the bag for the office." Do so.

What the office does. An admin or Accounting records the collection in the console from the slip (Kiosks, Cash collections, **Record from a slip**: the kiosk, who collected it, when, and the expected amount as on the slip), then counts the box as usual. The collection shows "From slip". The kiosk's count of the box starts again from zero, so its next normal collection counts only the cash after this one.

13. Safety and good practice

- Work on a kiosk only when no customer is using it. Opening the service door switches the screen to staff mode.
- Sign in **before** you open the cash door, and close the cash door before you sign out.
- Use your own username and password. Never tell anyone your password, and never let someone else work under your name: every action is recorded with your name.
- Never leave the kiosk with a door open or unlocked. Close the service door when you have finished; check that the start screen (or "Out of service", if something is still wrong) is back.
- Keep the cash box in its bag with its slip from the kiosk to the office. Never open the box or count it yourself: the office counts it, and you cannot count a box you collected.
- Load only 80 mm rolls, and print a test after each new roll.
- Never give a customer cash from the kiosk. A customer whose payment could not finish has a kiosk credit slip: send them to a TPPA counter.
- Take the kiosk out of service when it must not be used, and bring it back as soon as it can be.

14. When something is not right

Problem	What to do
The service door is open, but staff mode does not appear	Close and open the door again. If it still does not appear, call IT (the door sensor).
"Only kiosk custodians, the branch manager of this branch and admins can sign in here."	Your account may not service this kiosk (another branch, or not a custodian). Ask your branch manager or head office.
A wrong username or password	Type them again. Too many failed sign-ins lock your account for a while ("This account is temporarily locked after too many failed sign-ins"); wait, or ask an admin to unlock it.
You cannot sign in while the kiosk is offline	Only someone who signed in at this kiosk while it was online can sign in offline, and never an admin. Wait for the network, or ask a colleague.
A task says "Sign in first." or "Open the service door (staff mode) first."	Your sign-in ended (the door was closed). Open the door and sign in again.
Box swapped: print the slip is greyed out	The box is empty: there is nothing to collect.
The kiosk stays out of service after a fix	Tap **Check again**. Read What needs fixing: another problem may remain, or head office may have taken it out of service.
"Only the console brings it back."	Head office took it out of service. Ask the branch manager or head office.
A reprint is refused: "Only today's receipts are reprinted here; older ones at a counter or by head office."	Send the customer to a counter, or ask head office.
No sign-in, and "This kiosk was reset" or "The server does not recognise this kiosk"	Collect the cash with the NOT SENT slip, then call IT.

For everything else, see the **Troubleshooting guide**.

15. Quick reference

To	Do
Open staff mode	Open the service door
Sign in	**Username**, **Password**, **Sign in**
Leave staff mode	Close the service door (you are signed out within a second)
Let a colleague sign in	**Sign out**
Collect the cash	**Collect cash**, swap the box, **Box swapped: print the slip**, slip in the bag
Load paper	**Load paper**, new 80 mm roll, **Roll loaded: print a test**
Reprint today's receipt or credit slip	**Reprint**, then **Reprint** on its line

To	Do
See today's figures	**Today**
Print the X-reading	**Today**, **Print today so far**
Print the last Z-reading	**Today**, **Print its Z-reading**
Test the acceptors	**Test the acceptors**
Check the faults again	**Check again** on the fault's line
Stop the kiosk	**Take out of service**
Start it again	**Bring back into service** (or **Bring back**)
Collect from a reset kiosk	**Box swapped: print the slip** on the reset screen; sign the NOT SENT slip
See your branch's kiosks	Console, **Kiosks**

Number	Meaning
75 %	Head office is told to plan a collection; the meter turns amber
90 %	The meter turns red; at 90 % of the box's notes the kiosk stops
₱300,000.00	Default cash-box limit: the kiosk stops until the cash is collected
12:00 midnight	The kiosk closes the day by itself
30 minutes	Out of service this long: head office is emailed