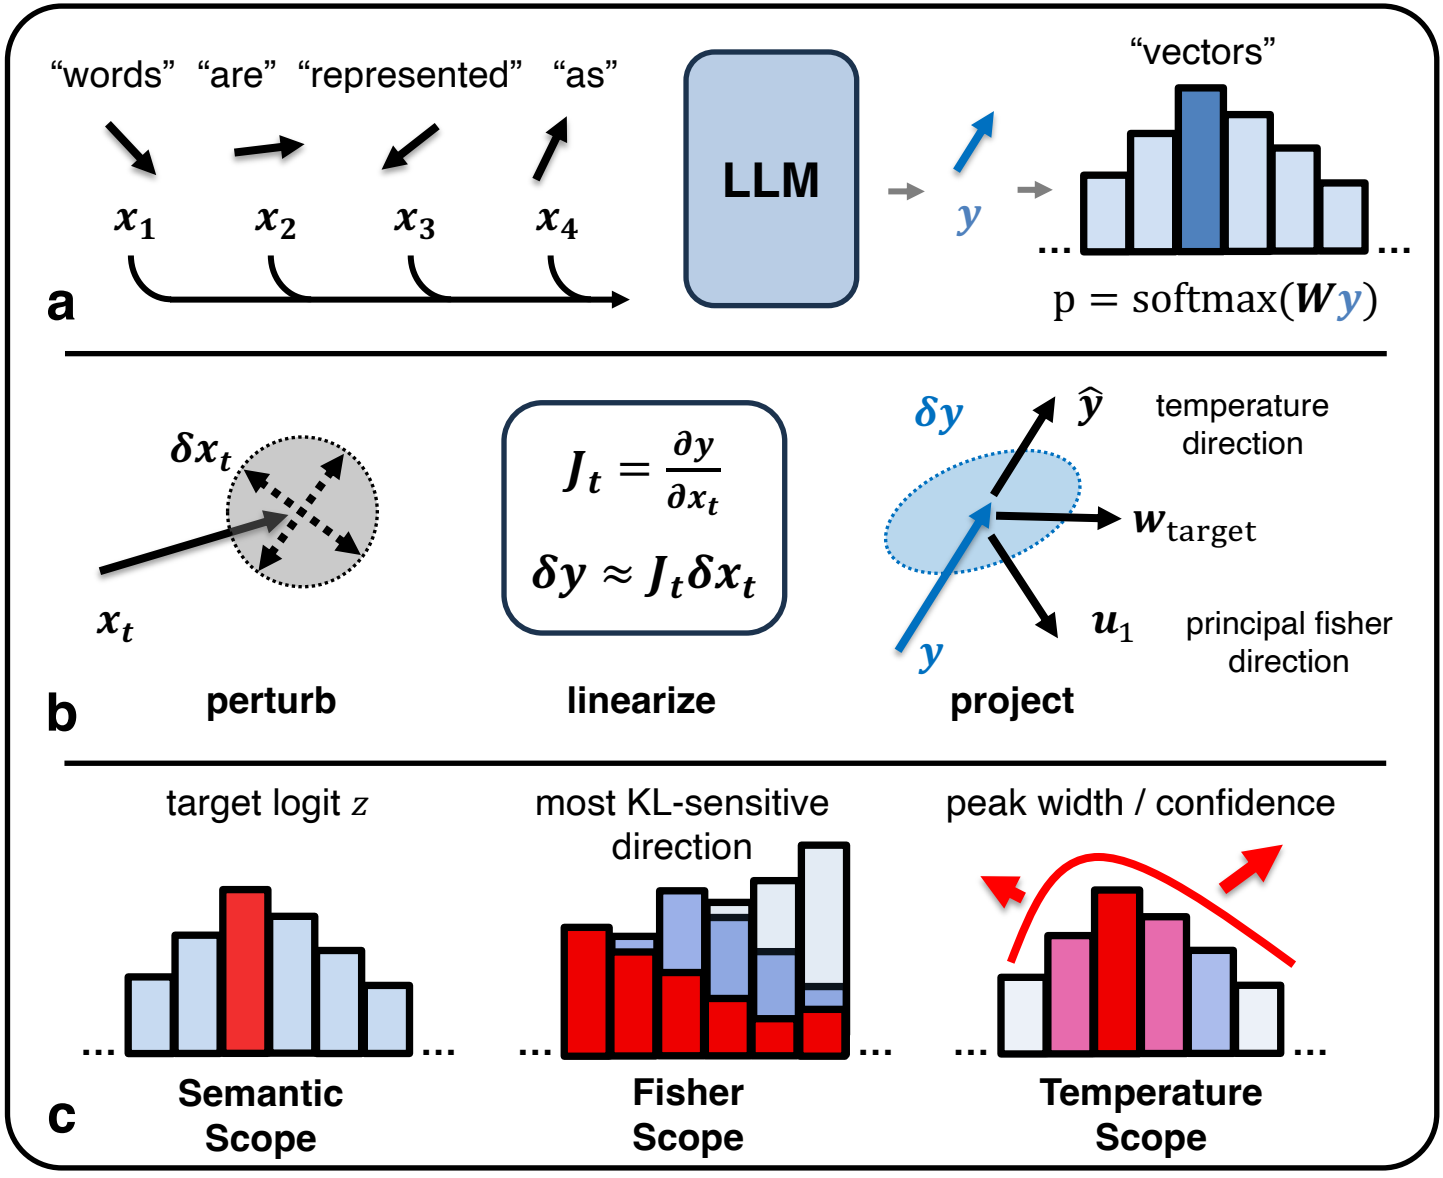

"words" "are" "represented" "as"
x_1 x_2 x_3 x_4
LLM
y
"vectors"
$p = \mathrm{softmax}(Wy)$
a
δx_t
x_t
$J_t = \frac{\partial y}{\partial x_t}$
$\delta y \approx J_t \delta x_t$
δy
$\hat{y}$
temperature direction
w_{target}
u_1
principal fisher direction
y
b
perturb
linearize
project
target logit z
most KL-sensitive direction
peak width / confidence
Semantic Scope
Fisher Scope
Temperature Scope
c