

TECHNICAL BULLETIN



MODEL/DERIVATIVE:

Mini

Bull. N°: 0045

CDS. ref: X6255bu

Issue: 1

Date: 22.03.2000

AFFECTED RANGE:

All

PROBLEM:

USE OF WIRING HARNESS CONNECTORS

Wiring repairs/connections - uncertainty of correct method.

CAUSE:

Unsuitable wiring connectors used for wiring repair resulting in subsequent failure in service.

ACTION:

If wiring rectification is considered necessary and the existing wiring section or connector cannot be replaced, an approved crimp type connector can be used.

The connectors are available in 3 sizes and must be selected to match cable size, the correct fitting procedure must also be applied.

CRIMP CONNECTOR FITTING PROCEDURE:


Tools required:

- Crimping tool (with colour and crimp size identification).
 - Heat gun.
1. Strip wires 7.5mm and insert into crimp barrel of the correct size connector ('a' in Illustration).
 2. Match the colour and size of the crimp connector with the colour and size of the crimp cavity on the crimping tool and apply crimps 'b'.
 3. Apply heat gun to crimp connector until tubing shrinks and seals connector 'c'.

CONNECTOR SIZES:-

Ensure correct crimp connector is selected to match the cable conductor size, refer to *PARTS INFORMATION* to order/select correct connector.

NOTE: Crimp connectors are permissible providing not more than two wires are inserted into any one cavity and connector is of adequate size for total conductor size.

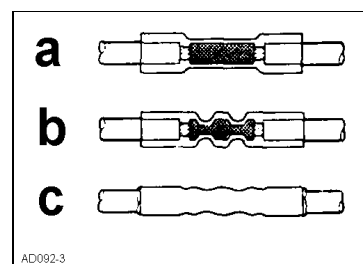

PARTS INFORMATION:

Part number:	Description:	Colour identification:	Conductor size:	Unit of issue
GES165	Connector	Red	0.25 - 1.65 mm²	25
GES166	Connector	Blue	1.04 - 2.63 mm²	25
GES167	Connector	Yellow	2.63 - 6.64 mm²	10

WARRANTY CLAIMS:
Information only.