


FDZ CONNECTOR

2.54 mm pitch/ Connectors for FPC and membrane switch leads/ ZIF type

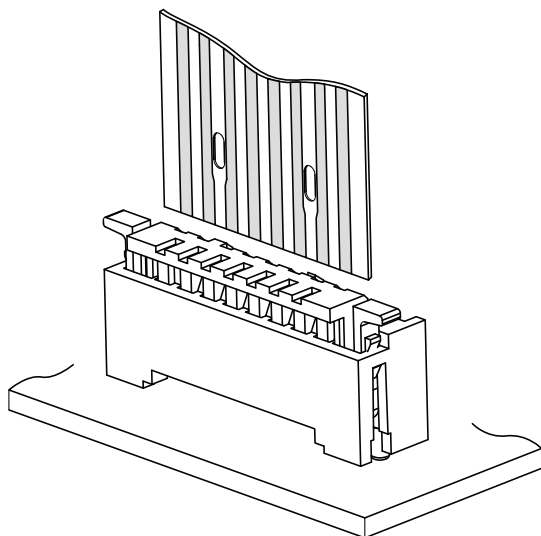

The FDZ connector is a Zero Insertion Force (ZIF) 2.54 mm pitch PCB connector that was developed to connect to FPC and membrane switch leads.

Press the slider to securely lock the membrane switch lead after ZIF installation.

Once locked, there is no misalignment or disconnection of the membrane switch lead, ensuring excellent connection reliability both mechanically and electrically.

- Compatible for use with membrane switch leads
- ZIF (Zero Insertion Force)
Easy ZIF installation with membrane switch leads
- Secure locking mechanism
The membrane switch lead can be locked using the slider.
- Polarization boss
Boss on the bottom prevents incorrect board mounting.

■ Specifications

- Current rating: 50 mA AC/DC
- Voltage rating: 250 V AC/DC
- Temperature range: -40°C to +85°C
(including temperature rise in applying electrical current)
- Contact resistance: Initial value/ 10 Ω max.
After test/ 15 Ω max.
- Insulation resistance: 1,000 MΩ min.
- Withstanding voltage:
There shall be no breakdown or flashover while applying 1,200 VAC for one minute.
- Compatible membrane switch lead:
Conductor materials, surface treatment/
silver paste, carbon coating
Conductor pitch/ 2.54 mm
Conductor width/ 1.3 mm
Mating part thickness / 0.125^{+0.075}_{-0.05} mm
- Applicable PC board thickness: 1.6 mm
- * Please refer to the "Handling Precautions for Terminals and Connectors" on our website (listed in the "Technical Documents" column on the Product Information page) before use.
- * RoHS2 compliance
- * Dimensional unit: mm
- * Contact JST for details.

■ Standards


For information on overseas standard registrations, please refer to the "List of Registered Overseas Standards" on our website (listed in the "Technical Documents" column on the Product Information page).

- * Specifications registered to overseas standards may differ from the general specifications listed above.


Connector

Top entry type

<5, 6, 19 circuits>

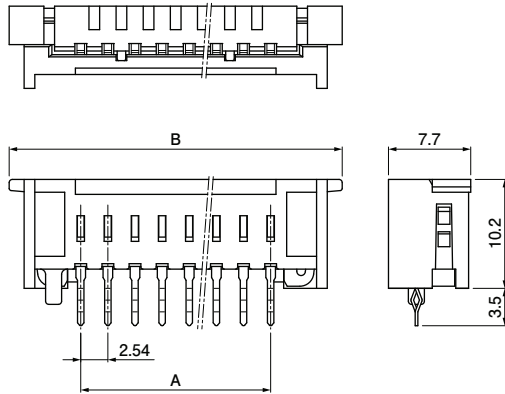


<8 to 13, 17 circuits>

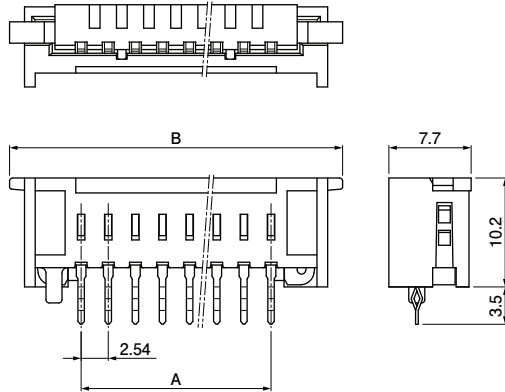


Side entry type

<5, 6 circuits>

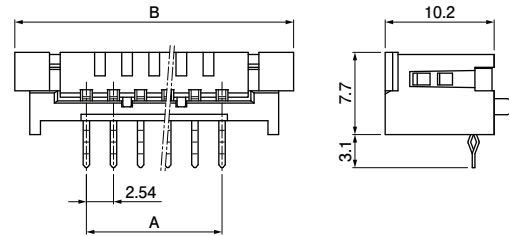

<8 to 13, 17 circuits>

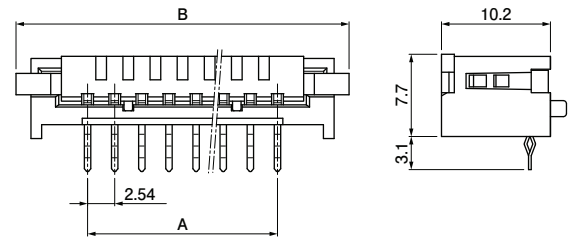


No. of circuits	Model No.		Dimensions (mm)		Q'ty/box
	Top entry type	Side entry type	A	B	
5	05FDZ-BT(S)	05FDZ-ST(S)	10.16	23.56	100
6	06FDZ-BT(S)	06FDZ-ST(S)	12.70	26.10	100
8	08FDZ-BT(S)	08FDZ-ST(S)	17.78	31.18	100
9	09FDZ-BT(S)	09FDZ-ST(S)	20.32	33.72	100
10	10FDZ-BT(S)	10FDZ-ST(S)	22.86	36.26	100
11	11FDZ-BT(S)	11FDZ-ST(S)	25.40	38.80	50
12	12FDZ-BT(S)	12FDZ-ST(S)	27.94	41.34	50
13	13FDZ-BT(S)	13FDZ-ST(S)	30.48	43.88	50
17	17FDZ-BT(S)	17FDZ-ST(S)	40.64	54.04	50
19	19FDZ-BT(S)	—	45.72	59.12	50

Material and Surface finish, etc

Contact: Copper alloy, tin-plated
Housing: PBT, black
Slider : PBT, black

Note: 1. This product displays (LF)(SN) on a label.
2. For flame retardant grade of resin material used, please refer to the "List of Registered Overseas Standards" on our website (listed in the "Technical Documents" column on the Product Information page).


Recommended dimensions for membrane switch lead

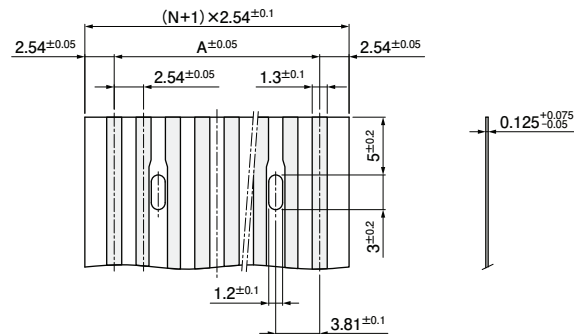


Note: 1. N: Number of circuits
2. Dimensions A: See "Connector" section on page 2.

PC board layout and Assembly layout

Top entry type

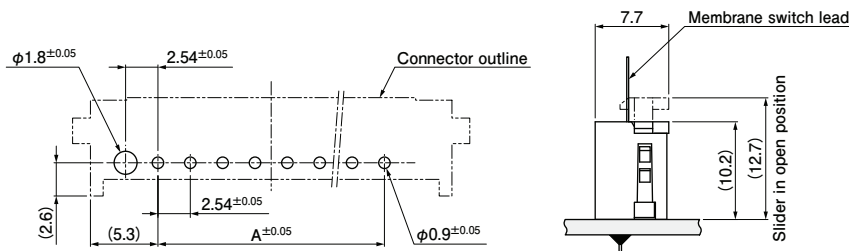

Side entry type

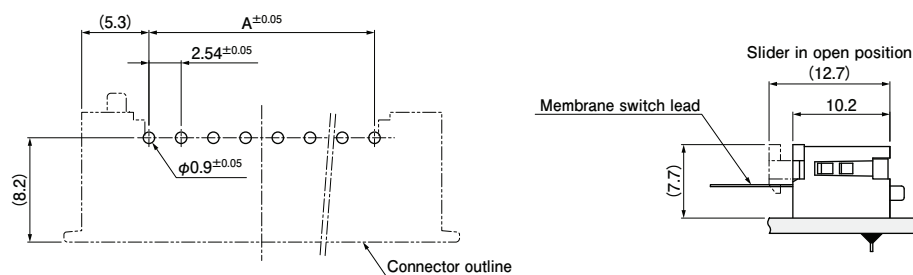

Note: 1. The PC board layout figure shown is viewed from the connector mounting surface.
2. Tolerance for the PCB hole pitch shall be ± 0.05 , and shall not accumulate more than ± 0.05 .
3. Dimensions A: See "Connector" section on page 2.
4. Hole dimensions differ depending on the type of PCB and PCB drilling method.
The above dimensions are for reference only. Please contact JST for further details.