



- Ground
- Power
- LED
- Internal Pin
- SWD Pin
- Digital Pin
- Analog Pin
- Other Pin
- Microcontroller's Port
- Default

- MAXIMUM** current per pin is 7mA
- MAXIMUM** source current is 46mA
- MAXIMUM** sink current is 65mA per pin group

VIN Input voltage to the board.




This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.


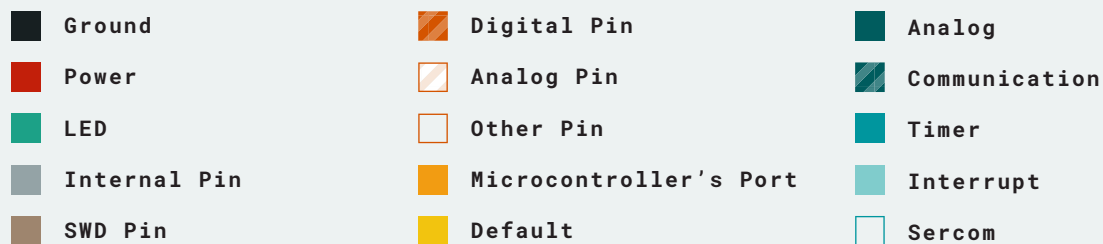


VIN Input voltage to the board.

When in USB OTG mode, VBUS works as output and 5V is generated from the LiPo battery

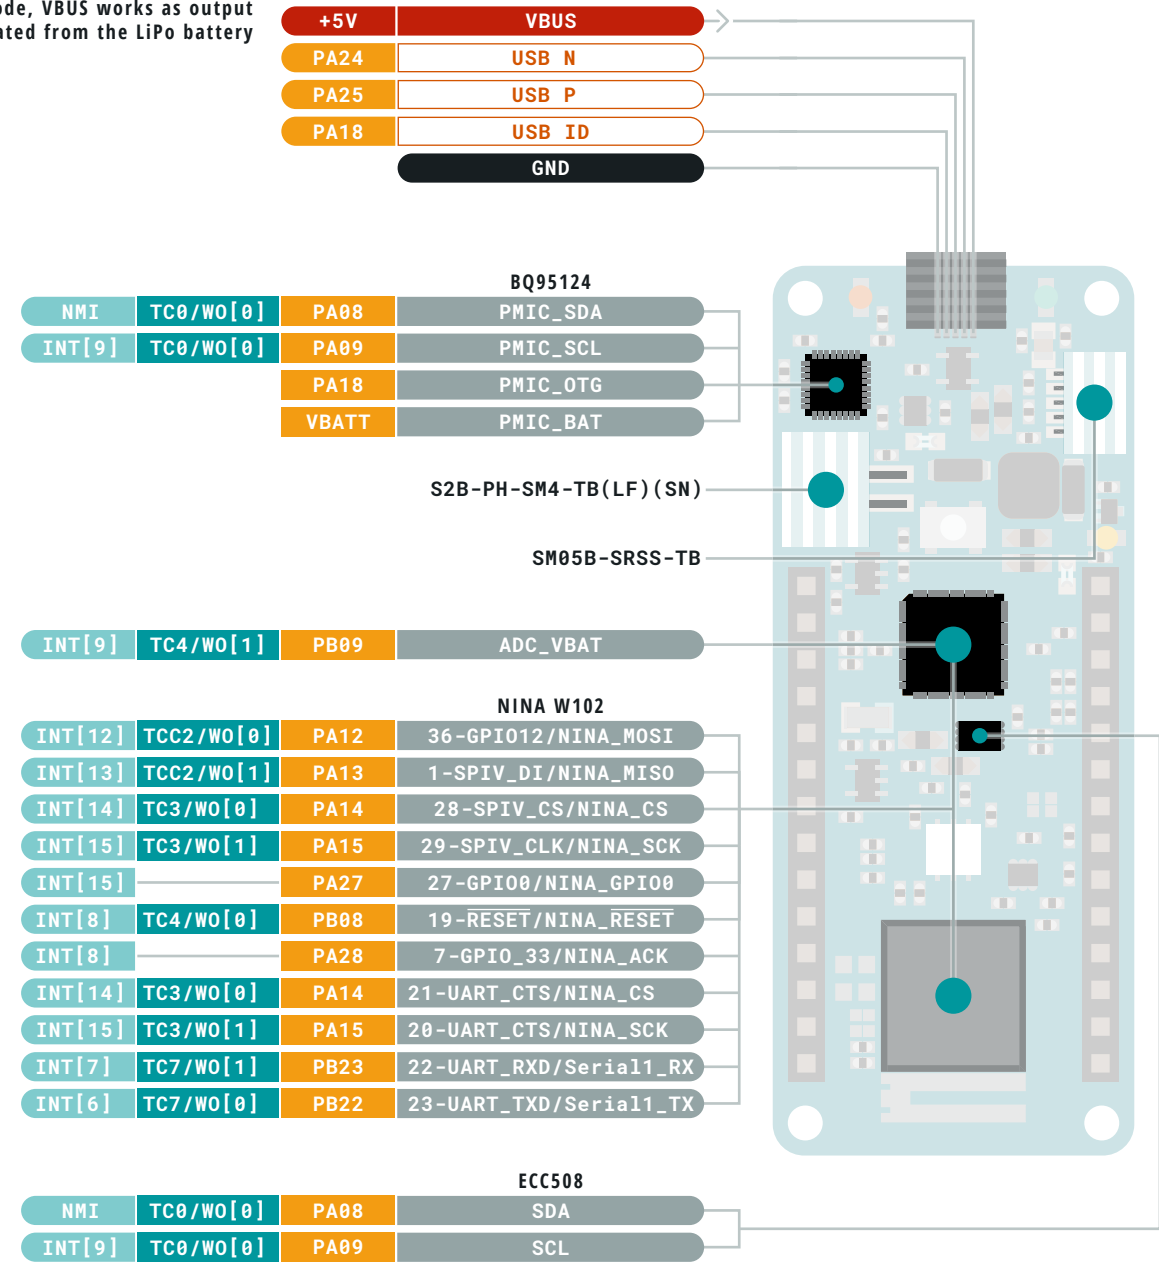

BOTTOM

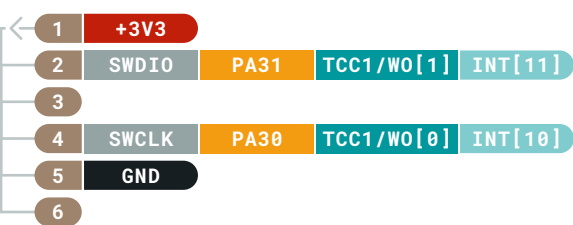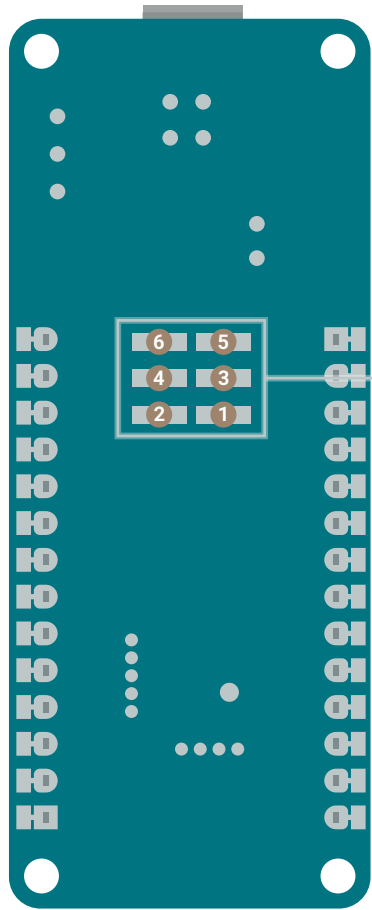

Ground

Power

LED

Internal Pin

SWD Pin

Digital Pin

Analog Pin

Other Pin

Microcontroller's Port

Default

Analog

Communication


Timer

Interrupt

Sercom

- ⚠️ **MAXIMUM** current per pin is 7mA
- ⚠️ **MAXIMUM** source current is 46mA
- ⚠️ **MAXIMUM** sink current is 65mA per pin group

VIN Input voltage to the board.



This work is licensed under the Creative Commons Attribution-ShareAlike 4.0 International License. To view a copy of this license, visit <http://creativecommons.org/licenses/by-sa/4.0/> or send a letter to Creative Commons, PO Box 1866, Mountain View, CA 94042, USA.