

Low Profile Sounder Base



SIGA-LPS

Overview

Low profile design provides aesthetics without the need for a separate surface mount box. The Signature Series SIGA-LPS sounder base adds audible output functions to any Signature Series detector. Bases can operate as independent local alarms, or as part of a zone or system alarm with synchronized audible output.

SIGA-LPS bases provide sounder capability to Signature Series single-function smoke detectors in a low profile design. The sounder provides 3khz constant or temporal tone for fire alarm conditions.

SIGA-LPS sounder base matches the finish of Signature Series devices, and the sound output slots complement the air entry openings of the detector. The result is a compact unit with an attractive appearance.

Standard Features

- **Temporal or steady tone**
Jumper selects steady or synchronized temporal output.
- **High or low dB output**
Jumper selects low or high dBA output.
- **Single or group operation**
Optional polarity reversing module configures base for group alarm output.
- **UL268 and UL464 listed**
UL listing under smoke detector and audible signal standards allows application as smoke alarm and/or audible signal.
- **Attractive installation**
Low profile design provides aesthetics without the need for a separate surface mount box

Application

Signature Series SIGA-LPS sounder bases are for use with Signature Series detectors in applications where localized or group alarm signalling is required. They are listed by Underwriters Laboratories under the UL268 and UL464 standards, allowing their application where both life safety alarms and/or notification appliances are required.

Programming and Field Configuration

Each SIGA-LPS base uses the same address and programming label as the detector it supports.

SIGA-LPS sounder bases can be set to simply operate according to the state of its detector, or configured through system programming to operate in conjunction with all sounder bases on the same circuit. They can also be controlled by program rules. Available operating modes are determined by the system that supports the Signature data loop.

Bases may be configured in the field for either high or low dB output. When used for fire alarm-only applications (i.e.: not with CO detectors), Bases may be configured for steady or temporal output. The default setting is high dB with temporal output.


Group Activation and Synchronization

SIGA-LPS sounder bases on the same circuit may be activated as a group or zone with the use of a SIGA-CRR polarity reversal module, and the group or zone may be synchronized audible output with the use of a G1M-RM signal master.


Installation and Mounting

Mounting

The SIGA-LPS sounder base flush mounts to a standard European 20 mm square electric boxes, a BESA box or a European single gang box. The terminal block makes field wire connections fast and efficient. After wiring, a simple push and twist motion locks the Signature detector into the base.

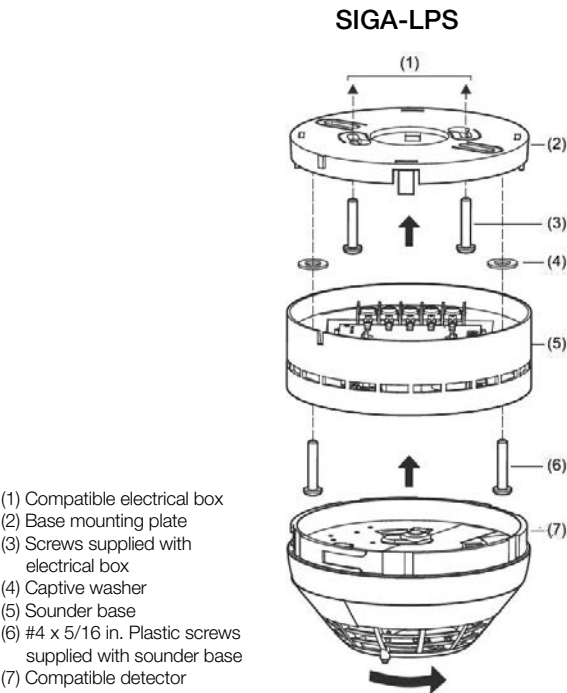

Configuration and Wiring

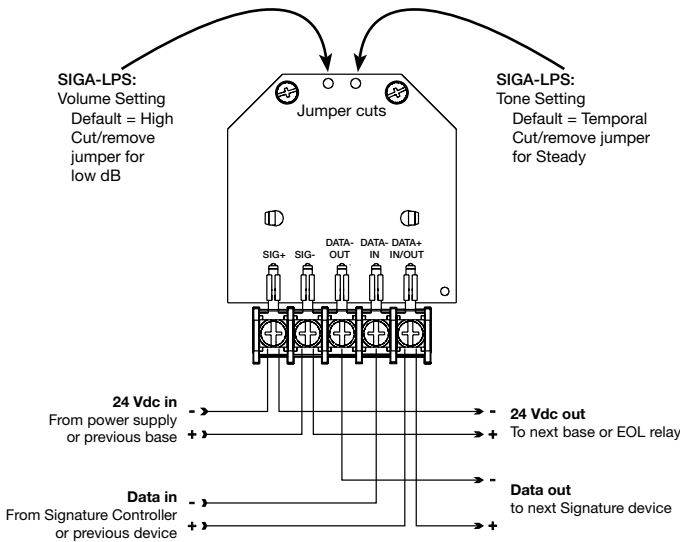


EDWARDS recommends that fire alarm systems and their devices always be installed in accordance with the latest recognized edition of national and local fire alarm codes.

Typical Wiring, Fire mode

SIGA-LPS sounder base


Detector operates the base

The base follows the state of the detector, going into and out of alarm with the detector. The Signature CR module is optional, and is used to silence the bases on the line.

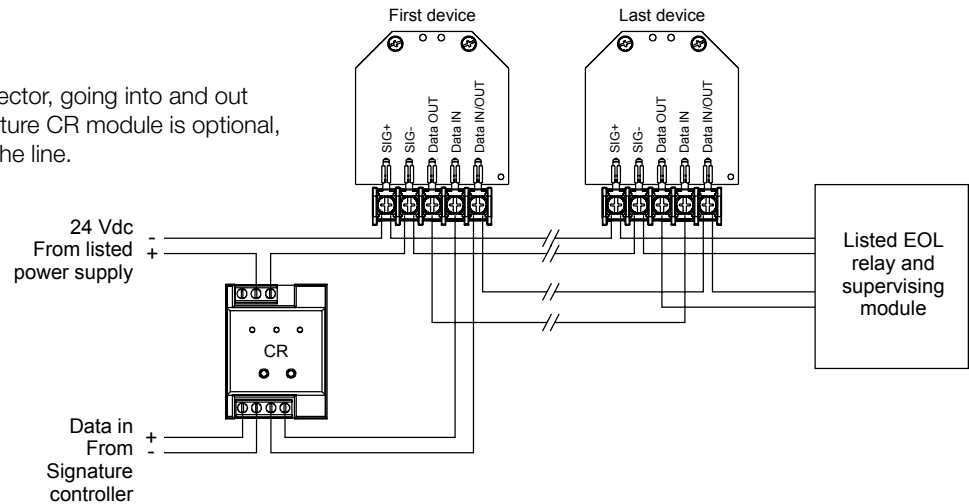


System turns on all bases

All bases on the line can be activated by system programming that triggers the Signature CRR to reverse the supplied polarity. The Signature CR module is optional, and is used to silence the bases on the line.

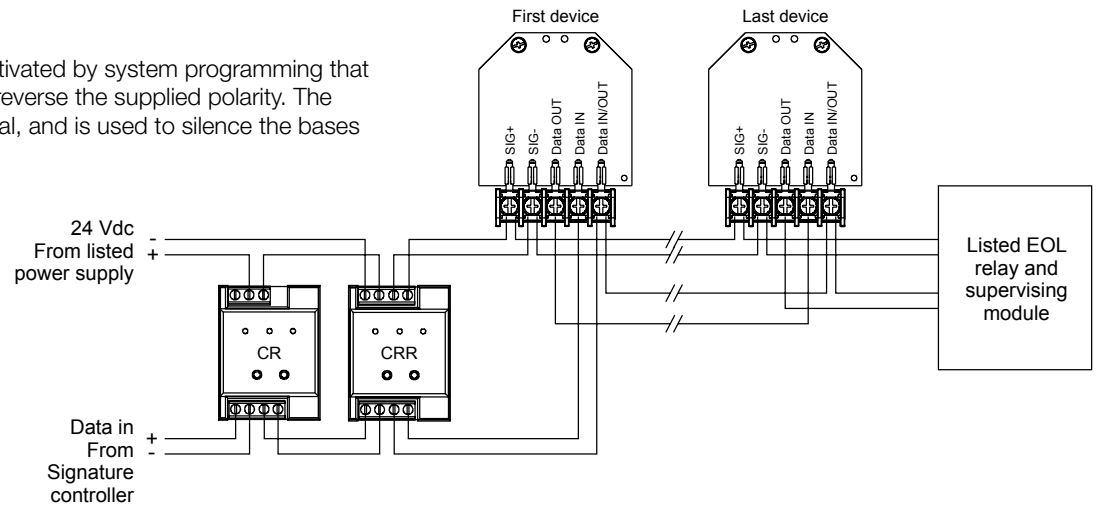

System turns on bases with synchronization

All bases on the line are activated by system programming that triggers the Signature CRR module. The temporal output is synchronized by the G1M-RM. If the Signature CRR module is not activated, each detector can still operate its base, but the bases will not be synchronized. The Signature CR module is optional, and is used to silence the bases on the line.

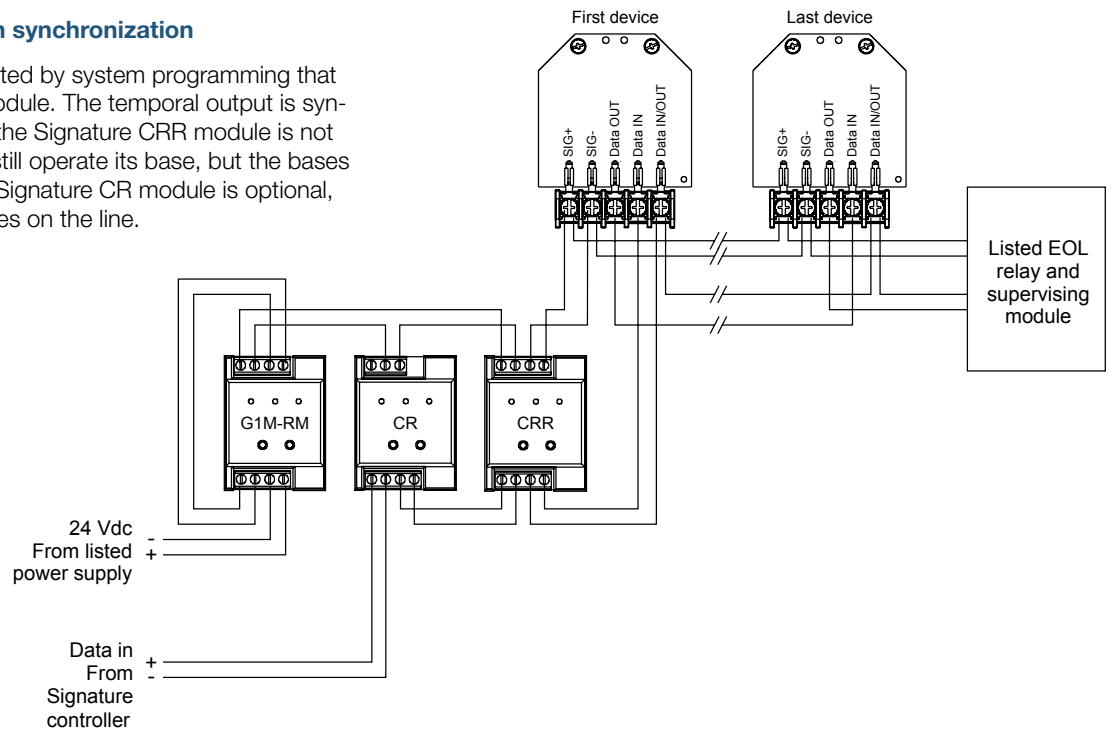



LIFE SAFETY & INCIDENT MANAGEMENT

Contact us

Phone: 800-655-4497 (Option 4)
 Email: edwards.fire@carrier.com
 Website: edwardsfiresafety.com

8985 Town Center Pkwy
 Bradenton, FL 34202

© 2021 Carrier
 All rights reserved.

Specifications

SIGA-LPS	
Riser operating voltage	16 to 33 VDC
Operating Current	See tables on previous page
Supervisory Current	DC = 1.46 mA, FWR = 2.15 mA
Default Output Volume	High dBA
Default Tone	Temporal
Resonant frequency	3.2 kHz
Temporal pattern	0.5 s on, 0.5 s off, 0.5 s on, 0.5 s off, 0.5 s on, 1.5 s off, repeat cycle
Compatible detectors	All Signature Series detectors
Compatible electrical boxes	Standard European 20 mm box, BESA box European single gang box
Wire size	12 to 18 AWG (0.75 to 2.50 mm ²)
Base diameter	6.8 in. (173 mm)
Base height from box	0.8 in. (21 mm)
Maximum distance from ceiling	Wall mount — 12 in. (305 mm)
Environment type	Indoor only
Operating environment	
Temperature	32 to 120°F (0 to 49°C)
Relative humidity	0 to 93% non condensing
Storage temperature	-4 to 140°F (-20 to 60°C)
Listings	UL

Ordering Information

Catalog Number	Description	Ship Wt., lb. (kg)
SIGA-LPS	Low Profile Sounder Base for Fire Detectors	0.3 (0.15)

Related Equipment

SIGA-MCRR	Polarity Reversal Relay (Plug-in UIO module)	0.18 (0.08)
SIGA-CRR	Polarity Reversal Relay (Standard mount module)	0.2 (0.1)
SIGA-MCR	Control Relay Module (Plug-in UIO module)	0.18 (0.08)
SIGA-CR	Control Relay Module (Standard mount module)	0.2 (0.1)
SIGA-RM1	Riser Monitor Module	0.2 (0.1)
G1M-RM	Signal Master (1-gang remote mount)	0.2 (0.1)

Sound Level Output, SIGA-LPS

Signal	Voltage	Low dBA	High dBA	Signal	Voltage	Low dBA	High dBA
Reverberant room per UL 464*				Reverberant room per UL 268			
Temporal	16 Vdc	71.5	78.1	Temporal	16 Vdc	77.5	84.1
	24 Vdc	75.5	80.7		24 Vdc	81.5	86.7
	33 Vdc	78.5	83.1		33 Vdc	84.5	89.1
Steady	16 Vdc	75.5	81.7	Steady	16 Vdc	81.5	87.7
	24 Vdc	79.5	84.5		24 Vdc	85.5	90.5
	33 Vdc	81.8	86.5		33 Vdc	87.8	92.5

dBA = Decibels, A-weighted

*For UL 464 applications low dBA settings are for private mode only.

Operating Current (RMS), SIGA-LPS

Voltage	Low dBA	High dBA	Notes
16 VDC	17	28	VDC = Volts direct current, regulated and filtered
24 VDC	24	41	
33 VDC	31	52	
16 VFWR	41	48	VFWR = Volts full wave rectified
24 VFWR	51	60	
33 VFWR	60	66	