

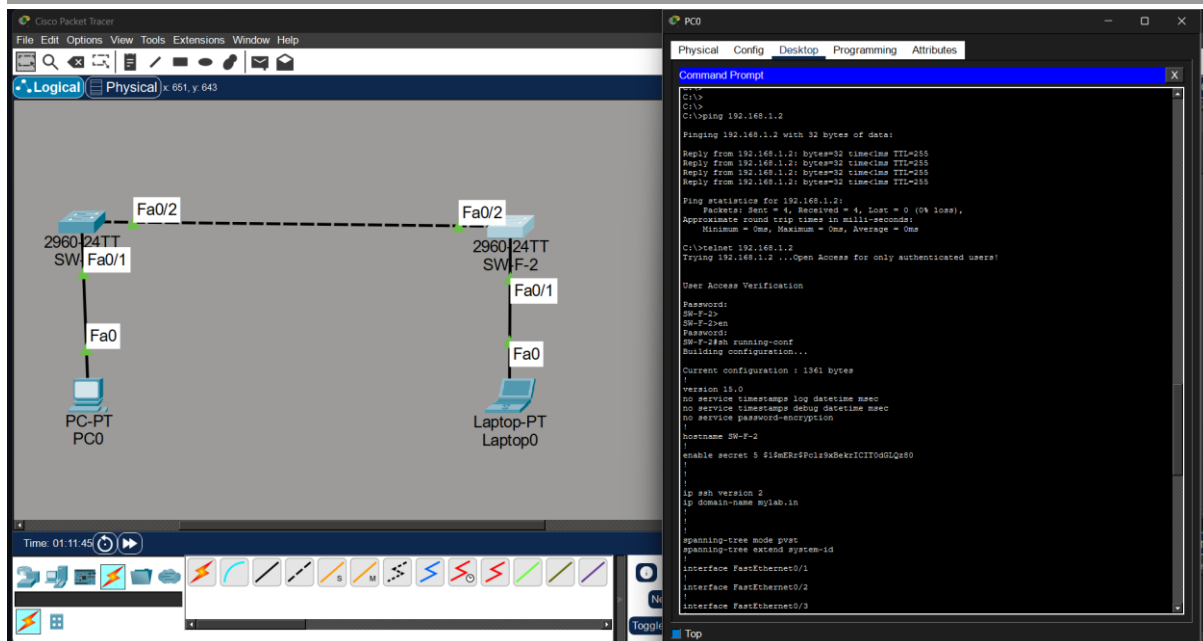
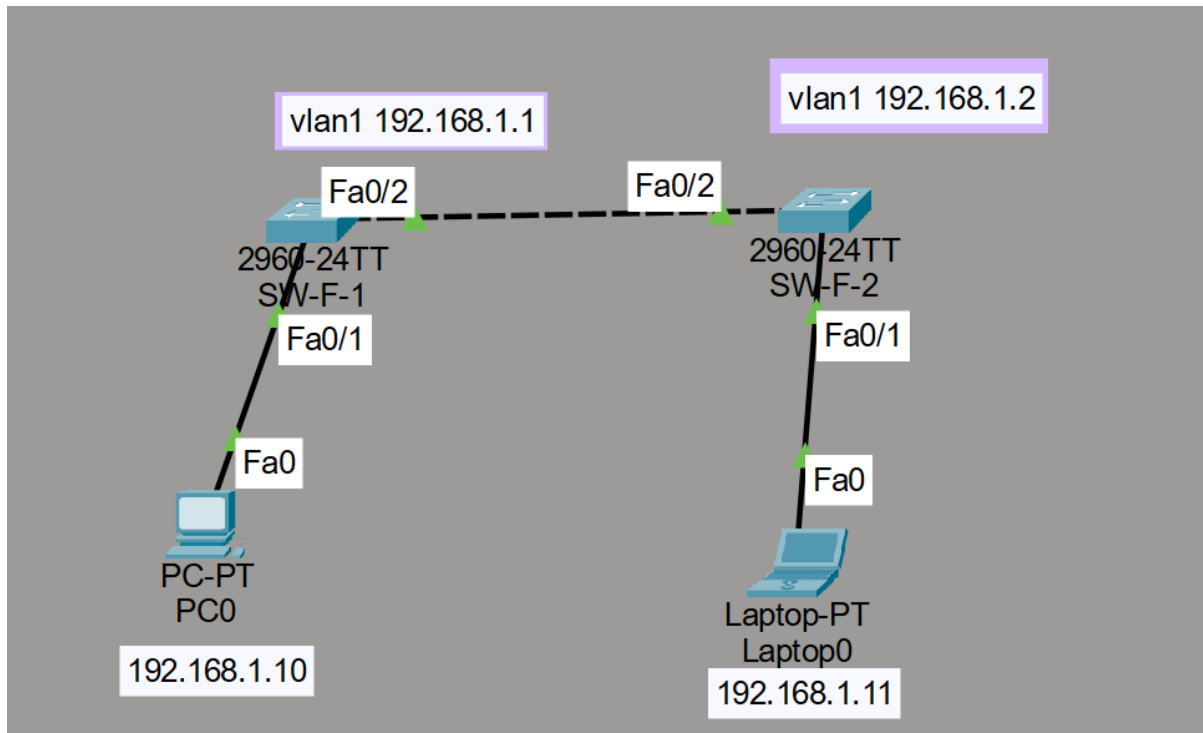


CASE A : Remote access by creating Vlan

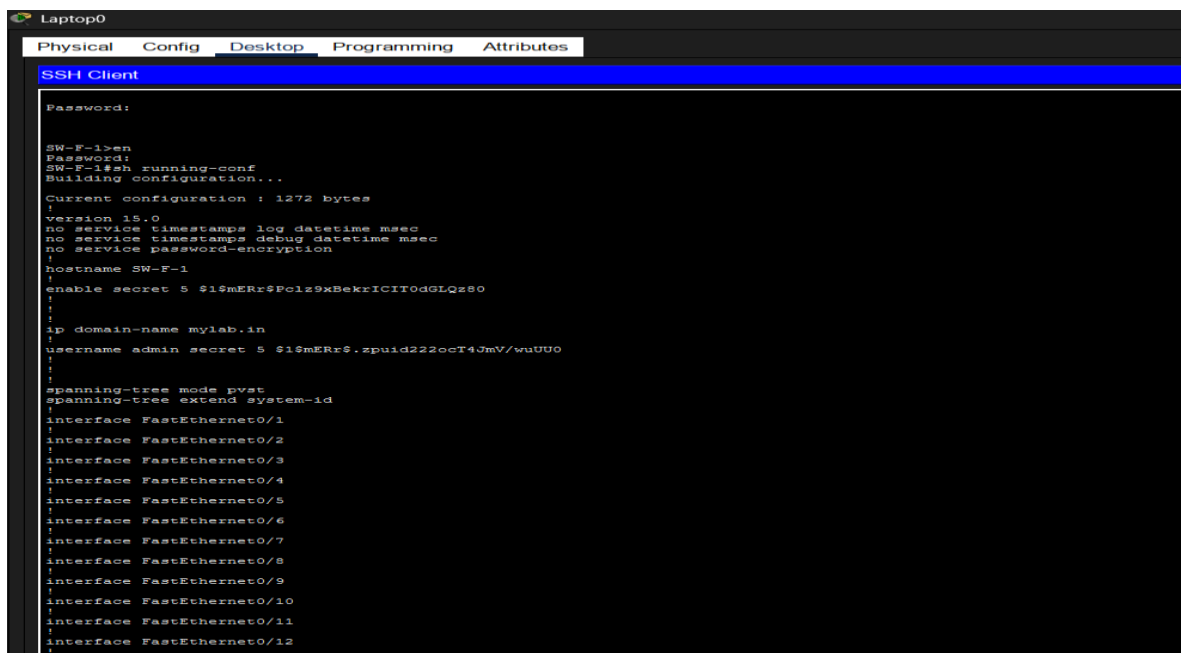

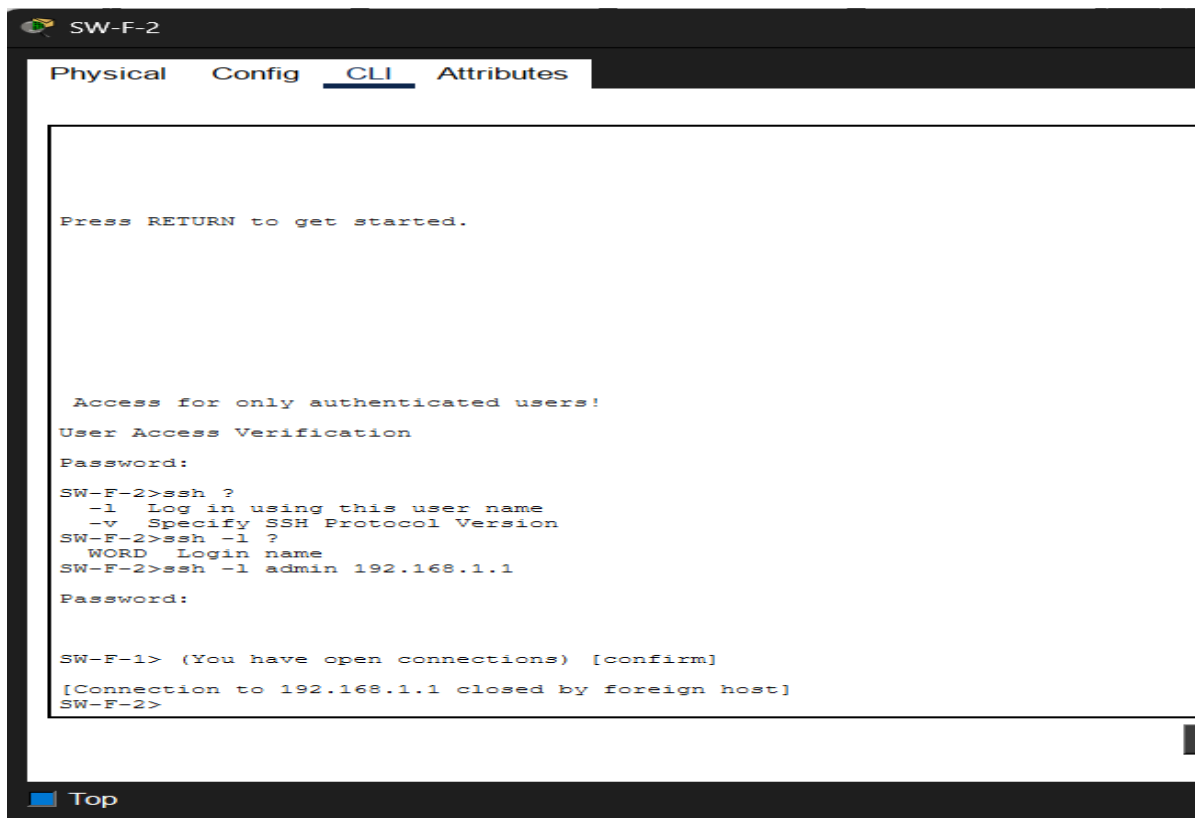

Tasks performed:

1. Assign ip for end devices – ip add <ip>

2. create vlan on switches

- Int vlan x x-number
- Ip add <ip> x.x.x.x

3. Securing access for

- Console
 line console x x-number taken x=0
 password "create"
- Prev exec mode access
 enable password/secret "create password"
 if key password – storage in plain text format
 (to encrypt that " service password encryption -but reversible)

Key is secret – stored as md5 hash -irreversible

4. Enabling remote access

A. without username

Line vty 0 15 (number of end device can connect at a time)

transport input/output ssh (by default it takes telnet)

password " "

login

B. with username

Username xyz (password " ')/(secret " ")/(privilege 15 secret " ")

Secret – md5 hash prev 15 – complete cmd access

Create domain (bcz ssh needs key fr encryption)

Ip domain-name xyz.abc

Cry key generate rsa rsa-asymmetric crpto alg

5.connection establishment

By switch

- ssh/telnet -l uname <ip>

by pc

- ssh uname@<ip>

Future Improvement:

Remote access through diff network