




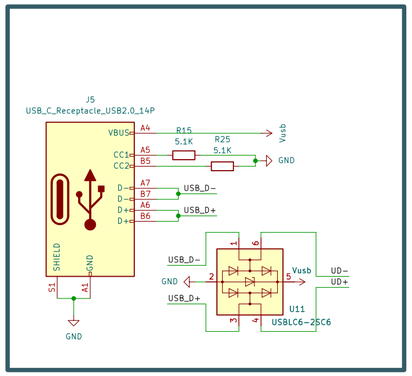


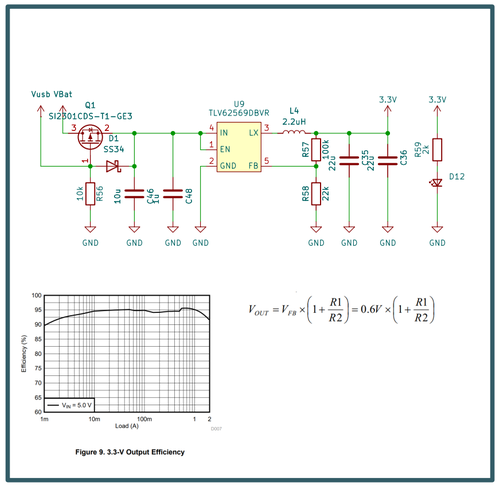


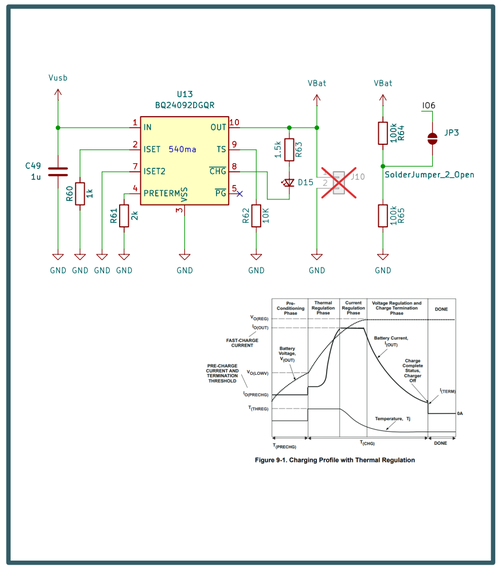


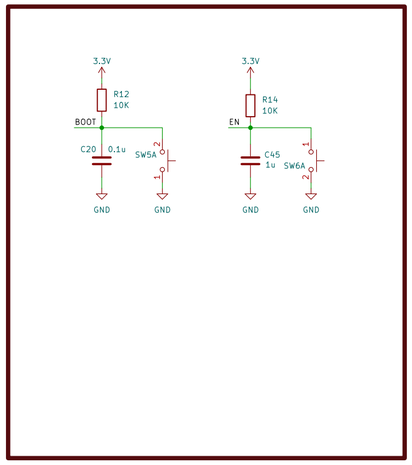


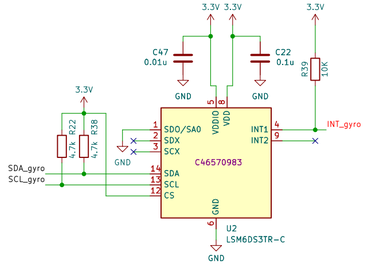




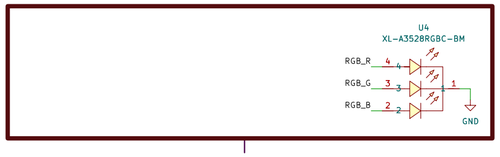


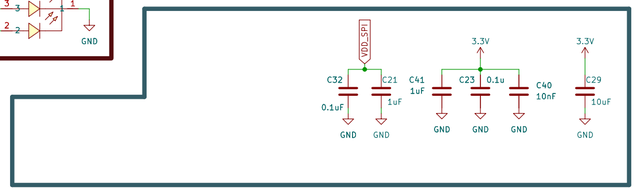


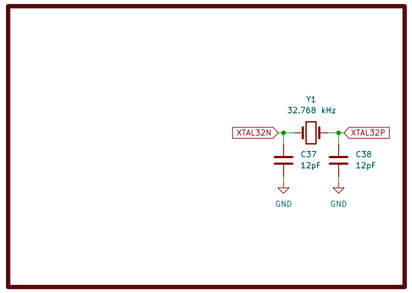


Documentation and source code:

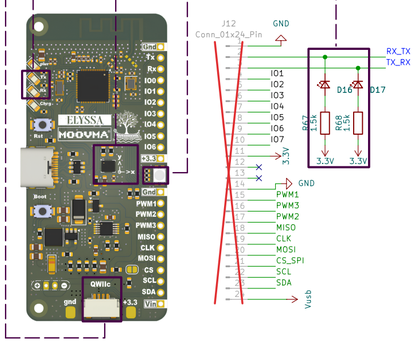

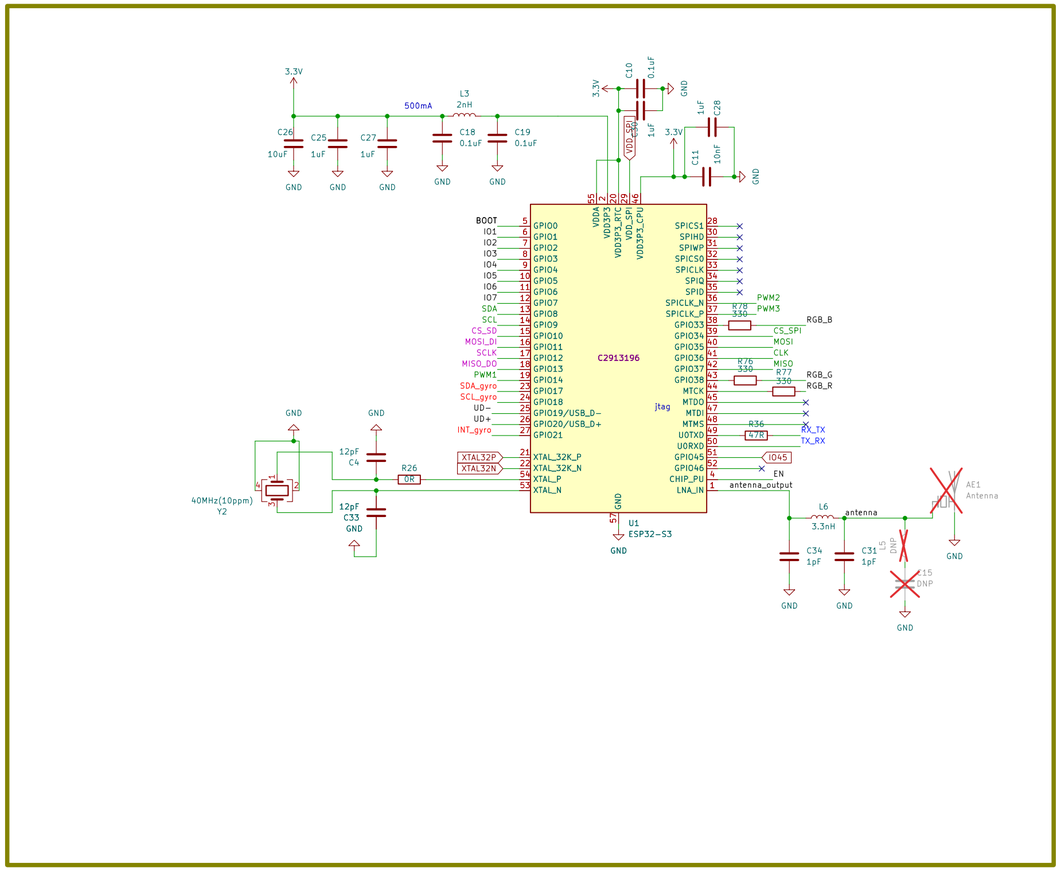

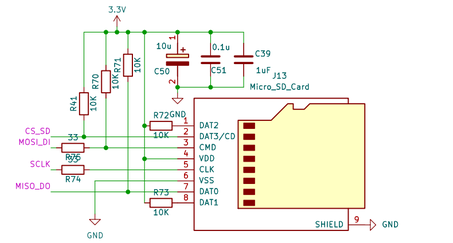



NAME	TYPE	I/O	GPIO	DIGITAL	ADC	UART	SPI	I2C	PWM	TOUCH	I2S
GND	power gnd	-									
TX	signal	output	GPIO43	yes		yes	yes	yes	yes		yes
RX	signal	input	GPIO44	yes		yes	yes	yes	yes		yes
IO0	signal	bidirectional	GPIO1	yes	ADC1	yes	yes	yes	yes	yes	yes
IO1	signal	bidirectional	GPIO2	yes	ADC1	yes	yes	yes	yes	yes	yes
IO2	signal	bidirectional	GPIO3	yes	ADC1	yes	yes	yes	yes	yes	yes
IO3	signal	bidirectional	GPIO4	yes	ADC1	yes	yes	yes	yes	yes	yes
IO4	signal	bidirectional	GPIO5	yes	ADC1	yes	yes	yes	yes	yes	yes
IO5	signal	bidirectional	GPIO6	yes	ADC1	yes	yes	yes	yes	yes	yes
IO6	signal	bidirectional	GPIO7	yes	ADC1	yes	yes	yes	yes	yes	yes
+3.3	power vcc	3.3 V									
GND	power gnd	-									
PWM1	signal	bidirectional	GPIO14	yes	ADC2	yes	yes	yes	yes	yes	yes
PWM2	signal	bidirectional	GPIO47	yes		yes	yes	yes	yes		yes
PWM3	signal	bidirectional	GPIO48	yes		yes	yes	yes	yes		yes
MISO	signal	bidirectional	GPIO37	yes		yes	yes	yes	yes		yes
CLK	signal	bidirectional	GPIO36	yes		yes	yes	yes	yes		yes
MOSI	signal	bidirectional	GPIO35	yes		yes	yes	yes	yes		yes
CS_SPI	signal	bidirectional	GPIO34	yes		yes	yes	yes	yes		yes
SCL	signal	bidirectional	GPIO9	yes	ADC1	yes	yes	yes	yes	yes	yes
SDA	signal	bidirectional	GPIO8	yes	ADC1	yes	yes	yes	yes	yes	yes
VIN	power vcc	5 V									
+	power vcc	3.7 V bat									
-	power gnd	-									
BOOT	signal	input	GPIO0	yes		yes	yes	yes	yes		yes
BAT_SENSE	signal	input	GPIO7	yes	ADC1	yes	yes	yes	yes	yes	yes

H1 MountingHole

H2 MountingHole

Sheet: /
File: elyssa_v5.kicad_sch

Title:

Size: A2 | Date: | **Rev:**
KiCad E.D.A. 10.0.1 | Id: 1/1