Table of Contents

..... 1
FILTER SPECIFICATIONS 1
1. PARKS-MCCLELLAN (EQUIRIPPLE) DESIGN 1
2. FREQUENCY-SAMPLING DESIGN 1
DISPLAY NUMERICAL OUTPUTS 1
FREQUENCY RESPONSES 2
PLOTTING 2
GRAPH 1: MAGNITUDE RESPONSE 3
GRAPH 2: PHASE RESPONSE 4
FINAL RESULT 5


```
clear;
clc;
close all;
```

FILTER SPECIFICATIONS

```
Fs = 10000;       % Sampling frequency (Hz)
fp = 1500;        % Passband edge (Hz)
fs = 2000;        % Stopband edge (Hz)
N = 40;           % Filter order
```

1. PARKS-MCCLELLAN (EQUIRIPPLE) DESIGN

```
f_bands = [0 fp fs Fs/2] / (Fs/2);
a_bands = [1 1 0 0];

b_pm = firpm(N, f_bands, a_bands);
```

2. FREQUENCY-SAMPLING DESIGN

```
b_fs = fir2(N, f_bands, a_bands);
```

DISPLAY NUMERICAL OUTPUTS

```
fprintf('=== EXPERIMENT 5: PARKS-MCCLELLAN vs FREQUENCY SAMPLING ===\n\n');

fprintf('Filter Order (N): %d\n', N);
fprintf('Sampling Frequency: %d Hz\n', Fs);
fprintf('Passband Edge: %d Hz\n', fp);
fprintf('Stopband Edge: %d Hz\n\n', fs);

fprintf('--- PARKS-MCCLELLAN COEFFICIENTS (First 10) ---\n');
disp(b_pm(1:10));
```

```
fprintf('--- FREQUENCY-SAMPLING COEFFICIENTS (First 10) ---\n');
disp(b_fs(1:10));
```

```
=== EXPERIMENT 5: PARKS-MCCLELLAN vs FREQUENCY SAMPLING ===

Filter Order (N): 40
Sampling Frequency: 10000 Hz
Passband Edge: 1500 Hz
Stopband Edge: 2000 Hz

--- PARKS-MCCLELLAN COEFFICIENTS (First 10) ---
  Columns 1 through 7

   -0.0015    0.0072    0.0053   -0.0010   -0.0081   -0.0072    0.0037

  Columns 8 through 10

    0.0142    0.0100   -0.0090

--- FREQUENCY-SAMPLING COEFFICIENTS (First 10) ---
  Columns 1 through 7

    0.0000    0.0001    0.0002   -0.0001   -0.0008   -0.0009    0.0008

  Columns 8 through 10

    0.0035    0.0029   -0.0039
```

FREQUENCY RESPONSES

```
[H_pm, f] = freqz(b_pm, 1, 1024, Fs);
[H_fs, ~] = freqz(b_fs, 1, 1024, Fs);

% Avoid log10(0)
mag_pm_dB = 20*log10(max(abs(H_pm), 1e-10));
mag_fs_dB = 20*log10(max(abs(H_fs), 1e-10));
```

PLOTTING

```
figure('Name', 'Parks-McClellan vs Frequency-Sampling');
```

GRAPH 1: MAGNITUDE RESPONSE


```
subplot(2,1,1);

plot(f, mag_pm_dB, 'b', 'LineWidth', 1.5);
hold on;
plot(f, mag_fs_dB, 'r--', 'LineWidth', 1.5);

grid on;
legend('Parks-McClellan (Equiripple)', ...
    'Frequency-Sampling', 'Location', 'best');

title(['FIR Magnitude Response Comparison (Order N = ', ...
    num2str(N), ')']);

xlabel('Frequency (Hz)');
ylabel('Magnitude (dB)');
xlim([0 Fs/2]);
ylim([-80 10]);
```

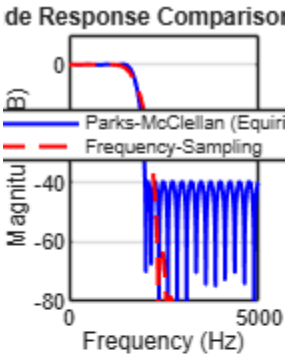

GRAPH 2: PHASE RESPONSE


```
subplot(2,1,2);


plot(f, unwrap(angle(H_pm))*180/pi, ...
    'b', 'LineWidth', 1.5);
hold on;

plot(f, unwrap(angle(H_fs))*180/pi, ...
    'r--', 'LineWidth', 1.5);

grid on;
legend('Parks-McClellan', 'Frequency-Sampling', ...
    'Location', 'best');

title('Phase Response Comparison');
xlabel('Frequency (Hz)');
ylabel('Phase (degrees)');
xlim([0 Fs/2]);
```

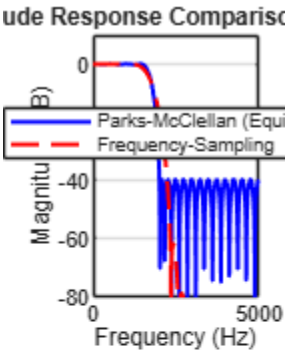

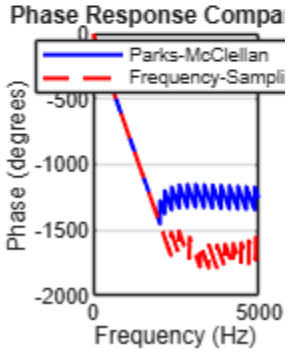

FINAL RESULT

```
fprintf('\n===========================================\n');
fprintf('FINAL RESULT\n');
fprintf('===========================================\n');
fprintf('1. Parks-McClellan FIR filter designed successfully.\n');
fprintf('2. Frequency-sampling FIR filter designed successfully.\n');
fprintf('3. Magnitude responses are plotted and compared.\n');
fprintf('4. Phase responses are plotted and compared.\n');
```

```
===========================================
FINAL RESULT
===========================================
1. Parks-McClellan FIR filter designed successfully.
2. Frequency-sampling FIR filter designed successfully.
3. Magnitude responses are plotted and compared.
4. Phase responses are plotted and compared.
```

Published with MATLAB® R2026b