Table of Contents

..... 1
FIR FILTER PARAMETERS 1
1. DIRECT REALIZATION 1
2. CASCADE REALIZATION 1
3. SYMMETRY AND LINEAR PHASE 2
4. FREQUENCY, PHASE AND GROUP DELAY 2
5. NUMERICAL COMPARISON 2
DISPLAY RESULTS 2
IMPULSE RESPONSE VALUES 3
CASCADE ZEROS 3
OUTPUT PARAMETER TABLE 4
GRAPH 1: DIRECT VS CASCADE IMPULSE RESPONSE 5
GRAPH 2: MAGNITUDE RESPONSE 6
GRAPH 3: PHASE RESPONSE 7
GRAPH 4: GROUP DELAY 7
GRAPH 5: NUMERICAL ERROR 8
FINAL RESULT 9


```
clc;
clear;
close all;
```

FIR FILTER PARAMETERS

```
b = [0.0625 0.2500 0.3750 0.2500 0.0625];
Fs = 1000;
N = 128;

x = [1 zeros(1, N-1)];
n = 0:N-1;
```

1. DIRECT REALIZATION

```
yd = filter(b, 1, x);
```

2. CASCADE REALIZATION

```
z = roots(b);
g = b(1);

yc = g * x;

for k = 1:length(z)
    yc = filter([1 -z(k)], 1, yc);
end
```

```
yc = real(yc);
```

3. SYMMETRY AND LINEAR PHASE

```
symErr = max(abs(b - fliplr(b)));
D = (length(b) - 1) / 2;

if symErr < 1e-12
    symmetry = 'Symmetric';
else
    symmetry = 'Not Symmetric';
end
```

4. FREQUENCY, PHASE AND GROUP DELAY

```
[H, w] = freqz(b, 1, 1024);
phase = unwrap(angle(H));
[gd, wg] = grpdelay(b, 1, 1024);
```

5. NUMERICAL COMPARISON

```
err = max(abs(yd - yc));
dev = err / max(abs(yd)) * 100;
```

DISPLAY RESULTS

```
fprintf('\n=============================================\n');
fprintf(' FIR FILTER REALIZATION RESULTS\n');
fprintf('=============================================\n');

fprintf('\nFIR Coefficients:\n');
disp(b);

fprintf('Sampling Frequency = %d Hz\n', Fs);
fprintf('Number of Samples = %d\n', N);

fprintf('Coefficient Symmetry = %s\n', symmetry);
fprintf('Symmetry Error = %.3e\n', symErr);
fprintf('Group Delay = %.2f samples\n', D);

fprintf('\nMaximum Error = %.3e\n', err);
fprintf('Percentage Deviation = %.3e %%\n', dev);
```

```
=============================================
 FIR FILTER REALIZATION RESULTS
=============================================

FIR Coefficients:
    0.0625    0.2500    0.3750    0.2500    0.0625
```

```
Sampling Frequency = 1000 Hz
Number of Samples = 128
Coefficient Symmetry = Symmetric
Symmetry Error = 0.000e+00
Group Delay = 2.00 samples

Maximum Error = 8.327e-16
Percentage Deviation = 2.220e-13 %
```

IMPULSE RESPONSE VALUES

```
fprintf('\n=========================================\n');
fprintf('FIRST 10 IMPULSE RESPONSE VALUES\n');
fprintf('=========================================\n');

fprintf(' n   Direct     Cascade\n');

for k = 1:10
    fprintf('%4d %10.6f %10.6f\n', ...
        n(k), yd(k), yc(k));
end
```

```
=========================================
FIRST 10 IMPULSE RESPONSE VALUES
=========================================
 n   Direct     Cascade
   0   0.062500   0.062500
   1   0.250000   0.250000
   2   0.375000   0.375000
   3   0.250000   0.250000
   4   0.062500   0.062500
   5   0.000000   0.000000
   6   0.000000   0.000000
   7   0.000000   0.000000
   8   0.000000   0.000000
   9   0.000000   0.000000
```

CASCADE ZEROS

```
fprintf('\n=========================================\n');
fprintf('CASCADE REALIZATION ZEROS\n');
fprintf('=========================================\n');

disp(z);
```

```
=========================================
CASCADE REALIZATION ZEROS
=========================================
  -1.0002 + 0.0000i
  -1.0000 + 0.0002i
```

```
  -1.0000 - 0.0002i
  -0.9998 + 0.0000i
```

OUTPUT PARAMETER TABLE

```
Parameter = {
    'Direct realization output'
    'Cascade realization output'
    'Impulse response'
    'Phase response'
    'Comparison of realizations'
};

Observation = {
    'Direct FIR filtering'
    'Cascade of first-order sections'
    'Equal to FIR coefficient sequence'
    'Linear phase'
    'Equivalent transfer-function behavior'
};

Value = {
    sprintf('[%.4f %.4f %.4f %.4f %.4f]', yd(1:5))
    sprintf('[%.4f %.4f %.4f %.4f %.4f]', yc(1:5))
    sprintf('[%.4f %.4f %.4f %.4f %.4f]', yd(1:5))
    sprintf('Group delay = %.2f samples', D)
    sprintf('Max error = %.3e; Deviation = %.3e %%', err, dev)
};

Unit_Note = {
    'Amplitude'
    'Amplitude'
    'h[n]'
    'Samples'
    'Numerical precision'
};

Output_Table = table(Parameter, Observation, Value, Unit_Note);

fprintf('\n=============================================\n');
fprintf('OUTPUT PARAMETER TABLE\n');
fprintf('=============================================\n');

disp(Output_Table);


=============================================
OUTPUT PARAMETER TABLE
=============================================
              Parameter
Observation
Value                                    Unit_Note
```


```
    {'Direct realization output' }    {'Direct FIR
filtering'                  }    {'[0.0625 0.2500 0.3750 0.2500
0.0625]'          }    {'Amplitude'          }
    {'Cascade realization output'}    {'Cascade of first-order
sections'      }    {'[0.0625 0.2500 0.3750 0.2500 0.0625]'          }
{'Amplitude'          }
    {'Impulse response'          }    {'Equal to FIR coefficient
sequence'    }    {'[0.0625 0.2500 0.3750 0.2500 0.0625]'          }
{'h[n]'               }
    {'Phase response'            }    {'Linear
phase'                         }    {'Group delay = 2.00
samples'                    }    {'Samples'           }
    {'Comparison of realizations'}    {'Equivalent transfer-function
behavior'}    {'Max error = 8.327e-16; Deviation = 2.220e-13 %'}
{'Numerical precision'}
```

GRAPH 1: DIRECT VS CASCADE IMPULSE RESPONSE

```
figure;

stem(n, yd, 'filled');
hold on;
stem(n, yc, '--');

grid on;
xlabel('Sample n');
ylabel('Amplitude');
title('Direct and Cascade FIR Impulse Responses');
legend('Direct Realization', 'Cascade Realization');
```

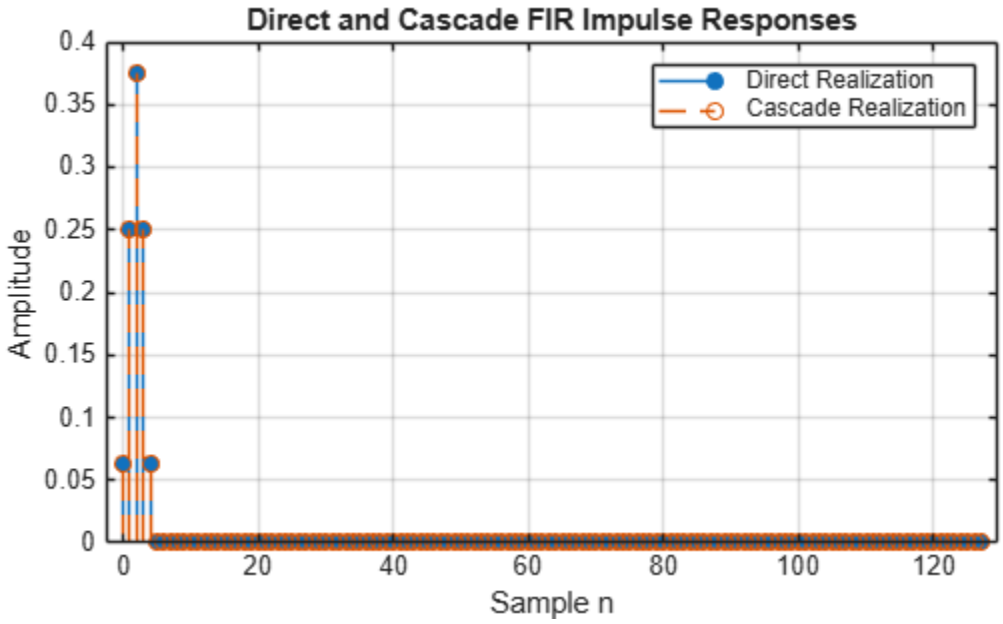


GRAPH 2: MAGNITUDE RESPONSE

```
figure;

plot(w/pi, abs(H), 'LineWidth', 1.5);

grid on;
xlabel('Normalized Frequency (\times\pi rad/sample)');
ylabel('|H(e^{j\omega})|');
title('FIR Magnitude Response');
```

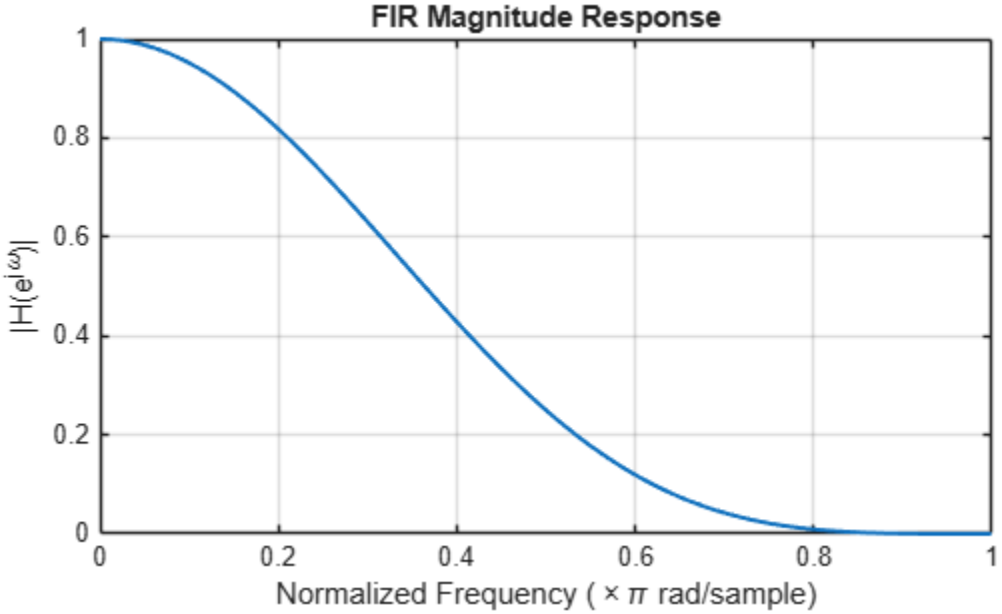


GRAPH 3: PHASE RESPONSE

```
figure;

plot(w/pi, phase, 'LineWidth', 1.5);

grid on;
xlabel('Normalized Frequency (\times\pi rad/sample)');
ylabel('Phase (radians)');
title('Unwrapped Phase Response');
```

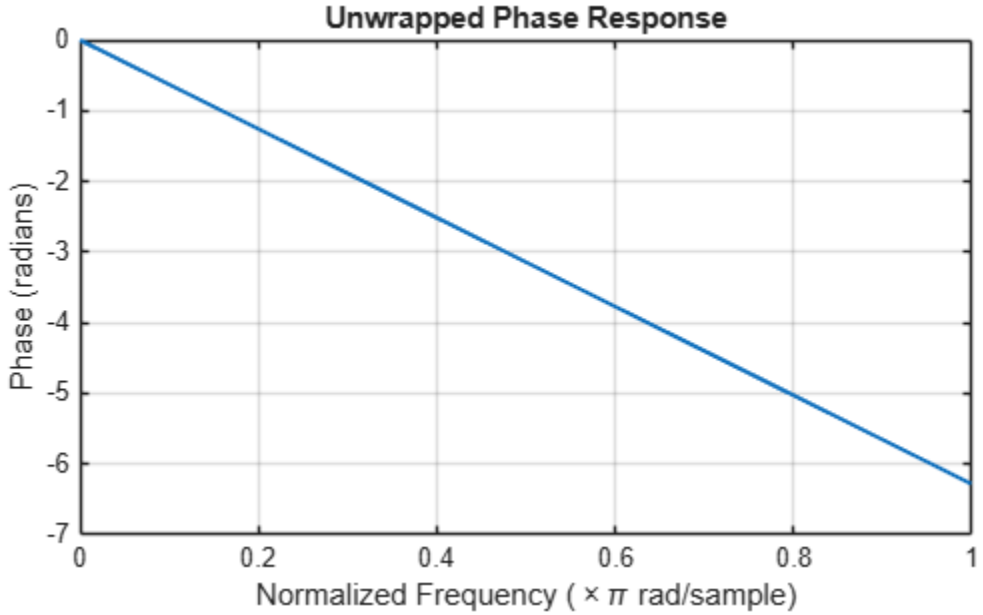


GRAPH 4: GROUP DELAY

```
figure;

plot(wg/pi, gd, 'LineWidth', 1.5);

grid on;
xlabel('Normalized Frequency (\times\pi rad/sample)');
ylabel('Group Delay (samples)');
title('Group Delay');
```

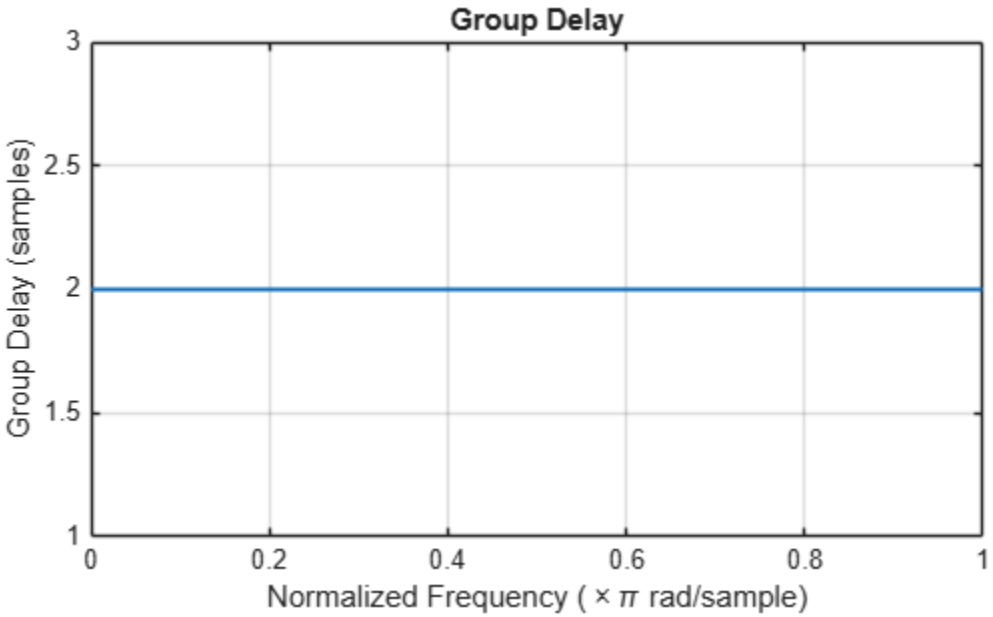


GRAPH 5: NUMERICAL ERROR

```
figure;

plot(n, abs(yd - yc), 'LineWidth', 1.5);

grid on;
xlabel('Sample n');
ylabel('Absolute Error');
title('Direct vs Cascade Numerical Error');
```

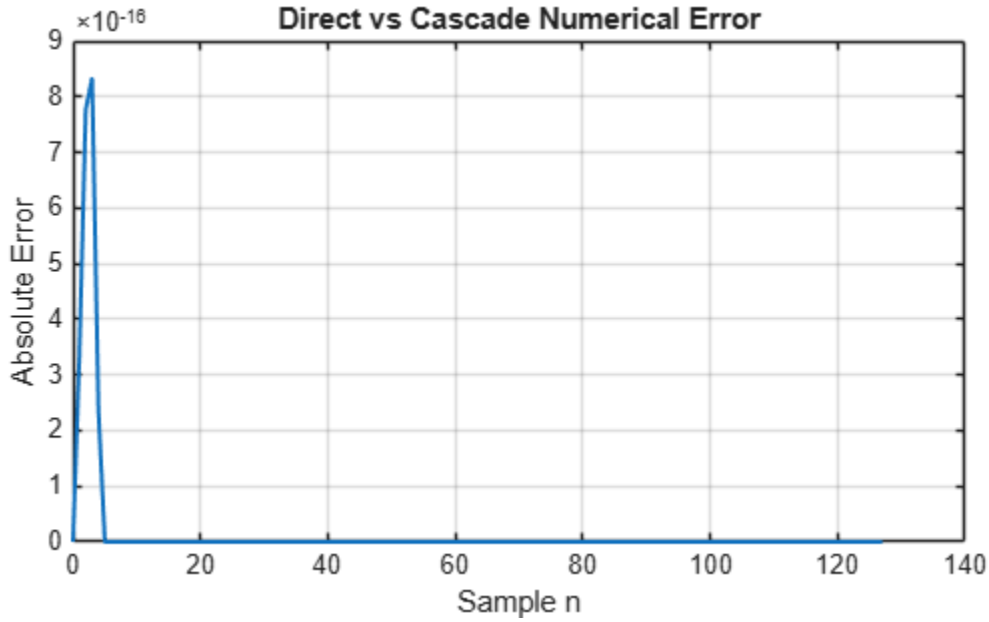

FINAL RESULT

```
fprintf('\n=========================================\n');
fprintf('FINAL RESULT\n');
fprintf('=========================================\n');

fprintf('1. FIR filter realized using Direct structure.\n');
fprintf('2. FIR filter realized using Cascade structure.\n');
fprintf('3. Coefficients are %s.\n', symmetry);
fprintf('4. Linear-phase group delay = %.2f samples.\n', D);
fprintf('5. Maximum realization error = %.3e.\n', err);
fprintf('6. Percentage deviation = %.3e %%.\n', dev);
fprintf('7. Direct and Cascade responses are equivalent.\n');
```

```
=========================================
FINAL RESULT
=========================================
1. FIR filter realized using Direct structure.
2. FIR filter realized using Cascade structure.
3. Coefficients are Symmetric.
4. Linear-phase group delay = 2.00 samples.
5. Maximum realization error = 8.327e-16.
6. Percentage deviation = 2.220e-13 %.
7. Direct and Cascade responses are equivalent.
```

Published with MATLAB® R2026b