




R-Link Chile SPA
RUT: 765652022
Nueva Providencia 1881 - Of. 1515
Providencia - Santiago
Tel: +56 2 24954462

Sensor RL-OPM-6LP

Hoja de datos
Versión 1.0

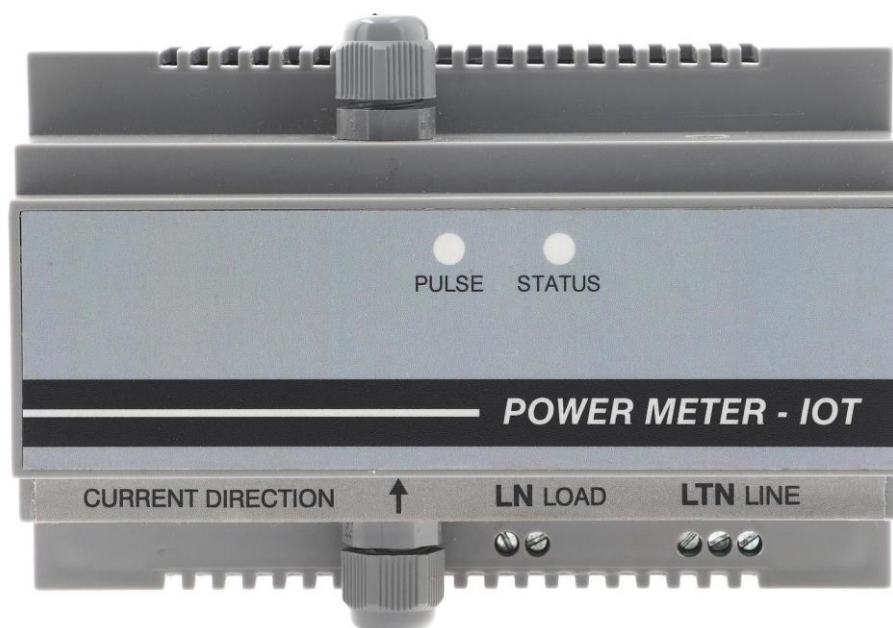

Historial de cambios

Versión	Fecha	Autor	Descripción
1.0	2020-09-29	Berardi Ariel	Creación del documento

Descripción

El equipo RL-OPM-6LP realiza la medición de magnitudes eléctricas de la red (**tensión, corriente, potencia, energía acumulada**) con un periodo de **90 segundos** y envía los valores a la nube por medio de una red **6LoWPAN**.

Características Técnicas

Parámetros eléctricos

Tensión	100 to 220V AC, 50 to 60Hz
Consumo	Típico: 1W Max:3W
Protecciones	Sobre Corrientes (fusible) y Sobretensiones
Conectividad	6LoWPAN
Dimensiones	21 cm x 10 cm x 8cm
Peso	0.5 Kg
Gabinete	Plástico Estanco IP65
Configuración	Remota vía WiFi
Batería	Si, último aliento

Rango de medición

	Rango	Unidad	Presición
Corriente RMS	0 a 10	A	±0.5%
Tensión RMS	0 a 350	V	±0.5%
Potencia Activa	0 a 2200	W	±0.1%
Potencia Reactiva	0 a 2200	VA _r	±0.1%
Frecuencia	0 a 3600	Hz	±0.1%
Energía	0 a 360	Wh	±0.3%

Objeto IPSO

Parámetros eléctricos

Object Name	Object ID	Instances
Power meter	7721	1

Resource Name	Resource ID	Type	Value
Current	1	Float	Current measured value
Voltage	2	Float	Current measured value
Frequency	3	Float	Current measured value
Power factor	5	Float	Current measured value
Active power	6	Float	Current measured value
Reactive power	8	Float	Current measured value
Active Energy	15	Float	Current measured value
Reactive Energy	19	Float	Current measured value