Upgrade the ONU Firmware from OLT in CLI mode

To upload the firmware to OLT:

1. Download a TFTP server from Google and install. We used **Tftpd64**

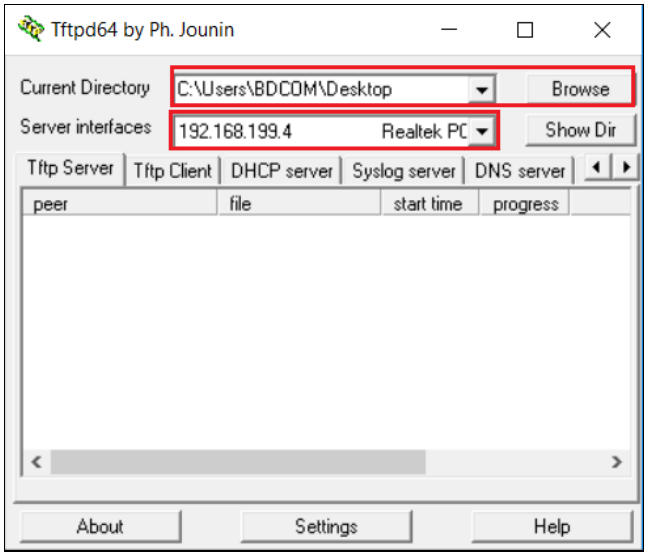

2. Download the latest ONU firmware and save it to your Desktop. Rename the file as "**image.tar"**. Before download please check and confirm the ONU model. To download the latest firmware please go to below site – https://sites.google.com/bdcom.cn/international/download/firmware/onuont?authuser=0

3. Set an IP address to your OLT. Here the OLT IP and subnet is ***192.168.199.3/255.255.255.0***

4. Connect the PC to OLT with any Giga port directly using an UTP cable. Assign the PC IP/subnet is **192.168.199.4/255.255.255.0**

5. Need to apply below commands step by step

   Copy tftp flash [then enter]
   image.tar [write the file name and give enter]
   192.168.199.4 [Remote-server ip address means your PC IP]

6. Destination file name [just give enter]

7. The file will start to upload to the OLT from PC

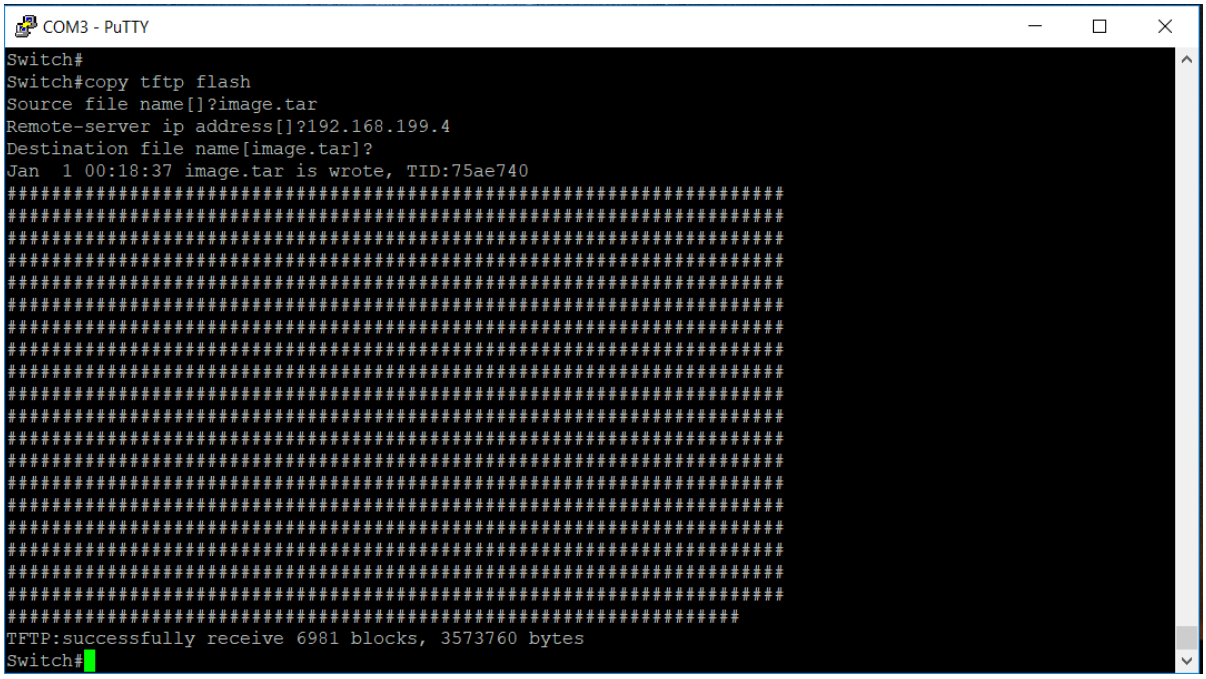

8. After successfully completion the upload a confirmation message will be shown like above image "TFTP: Successfully receive xxxx blocks, xxxx bytes"

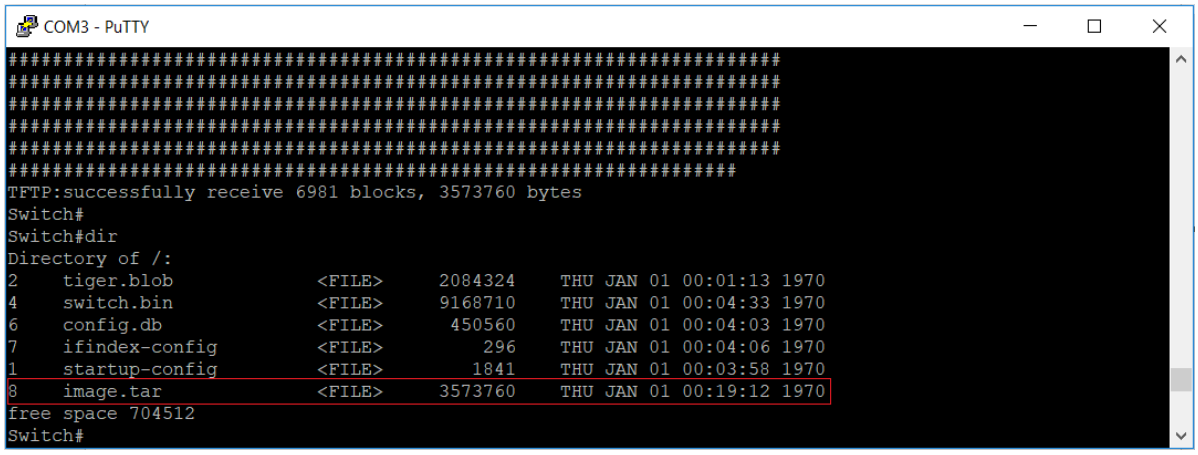

9. Switch#dir
   Use this command to check if the file (image.tar) is in the OLT flash memory

10. Use the following command to throw the ONU Firmware from the OLT

- Switch#epon update onu image ***image.tar*** interface epON 0/3:1

```
COM3 - PuTTY
  <cr>
Switch#epon update onu image image.tar interface epON 0/3 ?
  WORD     -- LLID sequences such as (1,3,5,7) Or (1,3-5,7) Or (1-7)
  <cr>
Switch#epon update onu image image.tar interface epON 0/3 1,2,3
Are you sure to update the ONU image(y/n)?y
%ONU-UPDATE: Load image to memory may take some time, please wait...
Loading image.tar.....
++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++
++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++
++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++
++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++
++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++++
+++++++++++++++++++++++++++++++++++++++++
%ONU-UPDATE: File image.tar len 3573760 Byte.
Image is already in memory!
.Image is already in memory!
Switch#Jan  1 00:24:23 The image is downloading to the ONU on EPON0/3:1, Please wait! The onu will reboot
 when downloading finished, and then you can check the software version after re-registration!
.................................................................................................
.................................................................................................
.................................................................................................
.................................................................................................
```

Note: It can be upgrade the firmware of a single ONU or it may upgrade multiple ONUs simultaneously. To upgrade the Firmware in multiple ONUs need to use comma (,) or Hyphen (-) to select the range.

11. After successfully completion the up gradation the ONU Firmware below image will be shown. The ONU will be rebooted automatically and it will be registered with the OLT

```
COM3 - PuTTY
.................................................................................................
.................................................................................................
.................................................................................................
.................................................................................................
...............................
Jan  1 00:29:04 Request ONU download check
Jan  1 00:29:04 ONU is still writing to flash
Jan  1 00:29:34 ONU is still writing to flash

Switch#Jan  1 00:30:04 ONU is still writing to flash

Switch#Jan  1 00:30:34 CTC OAM UPGRADE OK,PLS COMMIT AFTER ONU REBOOT
Jan  1 00:30:44 %OLT: Interface EPON0/3:1's OAM Operational Status: Linkfault
Jan  1 00:30:44 %LINE-5-UPDOWN: Line on Interface EPON0/3, changed state to down
Jan  1 00:30:44 %LINEPROTO-5-UPDOWN: Line protocol on Interface EPON0/3, changed state to down
Jan  1 00:30:47 %EPON-ONUDEREG: ONU 8479.7399.3cb6 is deregistered on EPON0/3:1.

Switch#
```

12. Lastly need to commit the ONU using following command-

- Switch#epon commit-onu-image-update interface ePON 0/3:1