

Fanvil тохиргоо хийх заавар



1. Интернет сүлжээн холбож тогонд залган асаана
2. Интернет утас нь ассаны дараа автоматаар тухайн сүлжээний интернет хаяг авах бөгөөд аппаратны нүүрэн хэсэгт байрлах



Fanvil үндсэн дэлгэц

Үндсэн дэлгэцийн **Menu** цэс/**Status** сонгоод **Ok** товчин дээр дархад **IPV4:xxx:xxx:xxx:xxx** хаяг авсан байна

3. Тухайн сүлжээнээс Web ээр дээрхи авсан хаягаар орно



Login дэлгэц

4. Fanvil (**X1S/X1SP**) Web ээр хандан орох default

User name: **admin**

Password: **admin**

5. Тохиргоо

- Line цэсийг сонгон Register Settings тохиргоо хийнэ.

Default password is in use. Please change

English Logout (admin) Keep Online

SIP SIP Hotspot Dial Plan Action Plan Basic Settings

Line 202.179.20

Register Settings >>

Line Status: Registered

Username: 70088880

Display name: 70088880

Realm:

Activate: ☒

Authentication User: 70088880

Authentication Password: *****

Server Name:

SIP Server 1:

Server Address: 202.179.9.2

Server Port: 5060

Transport Protocol: UDP

Registration Expiration: 3600 second(s)

SIP Server 2:

Server Address:

Server Port: 5060

Transport Protocol: UDP

Registration Expiration: 3600 second(s)

Proxy Server Address:

Proxy Server Port: 5060

Proxy User:

Proxy Password:

Backup Proxy Server Address:

Backup Proxy Server Port: 5060

NOTE

Description:
It shows phone registration account basic settings and sip account function advanced settings.

Current Software Version: 2.2.12
Fanvil Technology Co., Ltd. (C)2020 All Rights Reserved.

- Basic settings:

Default password is in use.

SIP SIP Hotspot Dial Plan Action Plan Basic Settings

Line 202.179.20

Register Settings >>

Basic Settings >>

Enable Auto Answering: ☐

Call Forward Unconditional: ☐

Call Forward on Busy: ☐

Call Forward on No Answer: ☐

Call Forward Delay for No Answer: 5 (0~120)second(s)

Conference Type: Local

Subscribe For Voice Message: ☐

Voice Message Subscribe Period: 3600 (60~999999)second(s)

Hotline Delay: 0 (0~9)second(s)

Dial Without Registered: ☐

DTMF Type: In-band

Request With Port: ☒

Use STUN: ☐

Enable Failback: ☒

Failback Interval: 1800 second(s)

Auto Answering Delay: 5 (0~120)second(s)

Call Forward Number for Unconditional:

Call Forward Number for Busy:

Call Forward Number for No Answer:

Transfer Timeout: 0 second(s)

Server Conference Number:

Voice Message Number:

Enable Hotline: ☐

Hotline Number:

Enable Missed Call Log: ☒

DTMF SIP INFO Mode: Send 10/11

Enable DND: ☐

Use VPN: ☐

Signal Failback: ☐

Signal Retry Counts: 3 (1~10)


Codecs Settings >>

Advanced Settings >>


SIP Global Settings >>

Current Software Version: 2.2.12
Fanvil Technology Co., Ltd. (C)2020 All Rights Reserved.

- Codecs Settings:

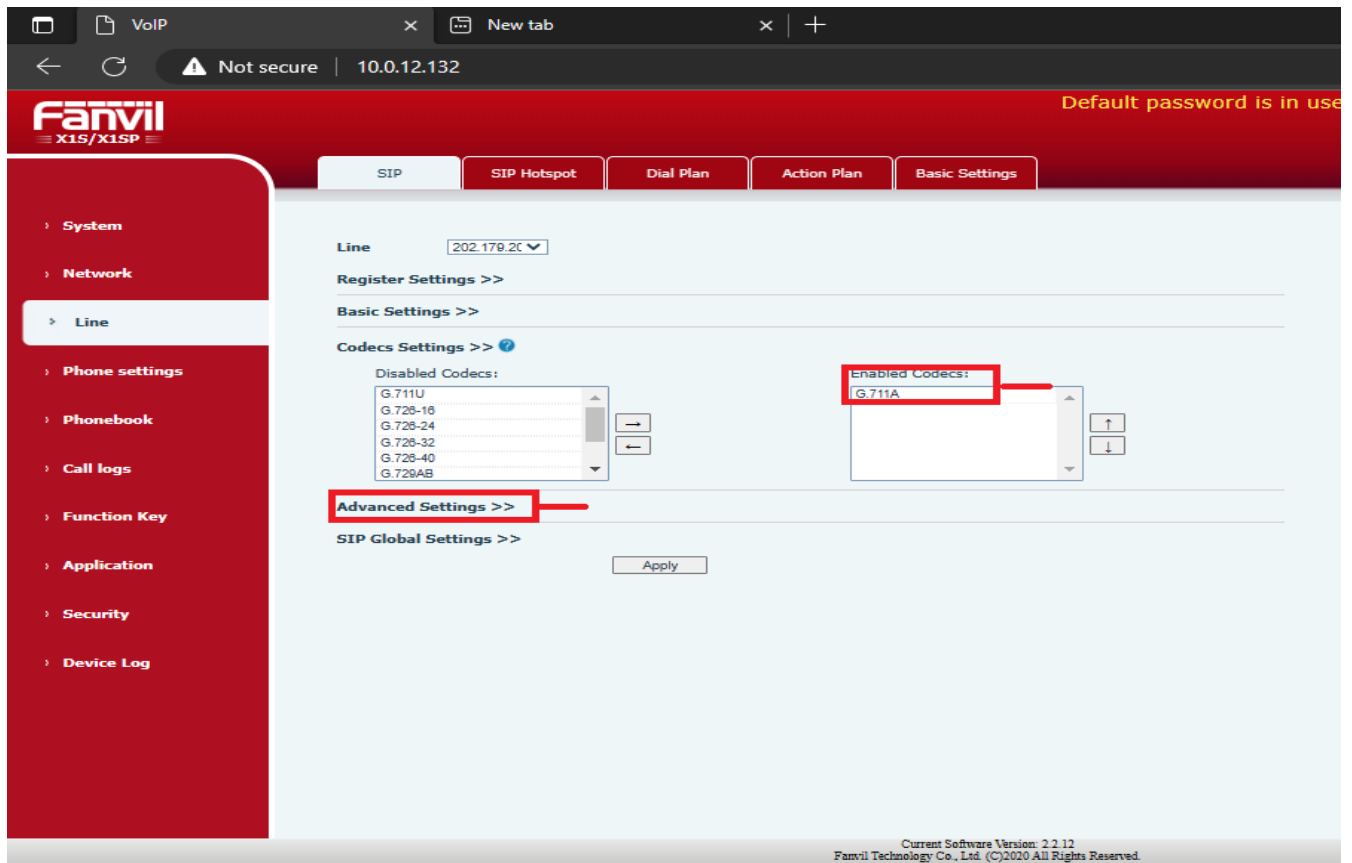

- Advanced Settings:

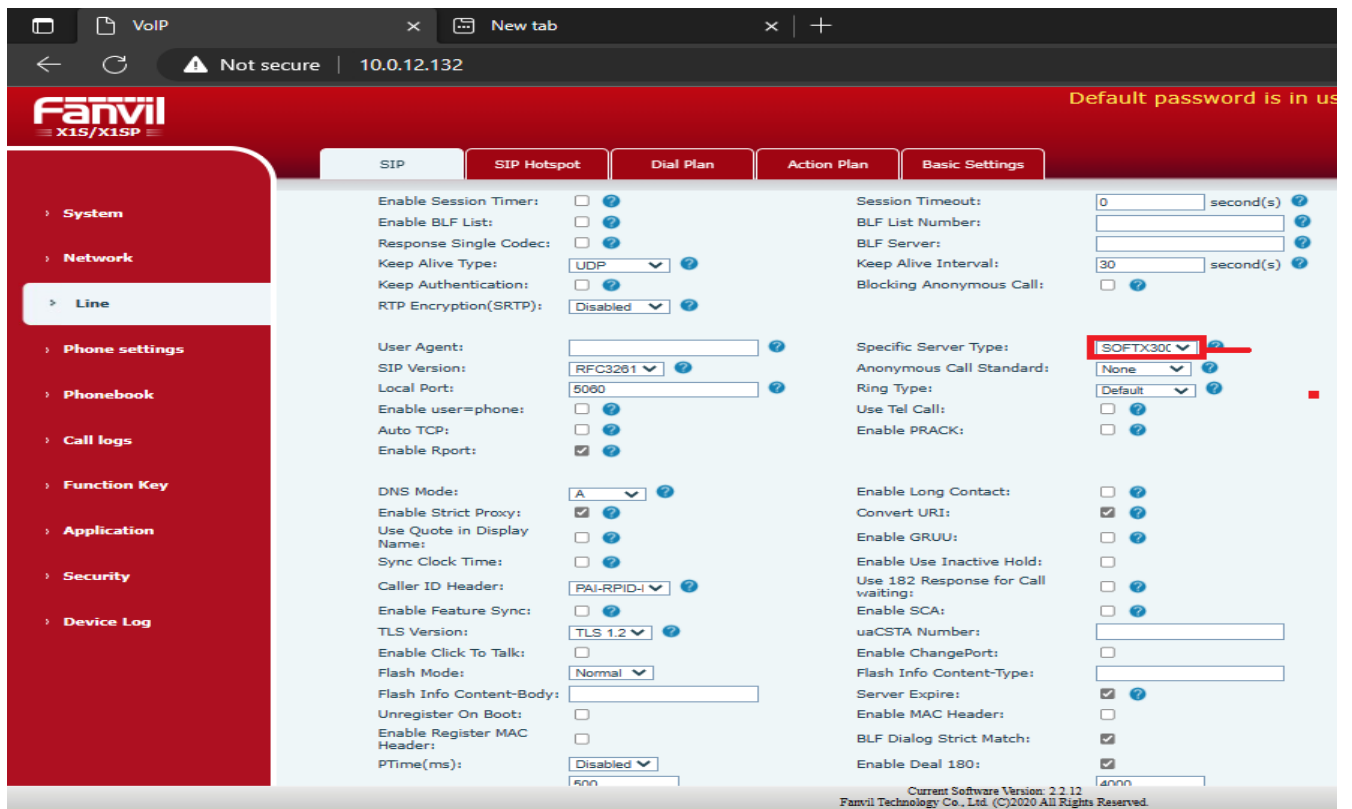

Бүх үйлдлийг хийж гүйцэтгэсэний дараа **Apply** товчийг дарж хадгална.

Line 202.179.20 ▾

Register Settings >>

Line Status:	Registered	Activate:	☒ ?
Username:	11331399	Authentication User:	11331399
Display name:	11331399	Authentication Password:	
Realm:		Server Name:	202.179.20.22

Line Status: нь **Registered** болсон үед тохиргоо бүрэн хийгдсэн гэж үзнэ.

Жич: Сүүлийн үед их хуучирсан Fanvil аппаратууд ашиглаад байгаа тул тэр Fanvil-ууд end of life болсон тул солих шаардлагатай шүү гэдгийг сануулья.