


Micro-ES3: ESP32-S3 WROOM 1 N16R8 WiFi/Bluetooth Microcontroller Dev Board

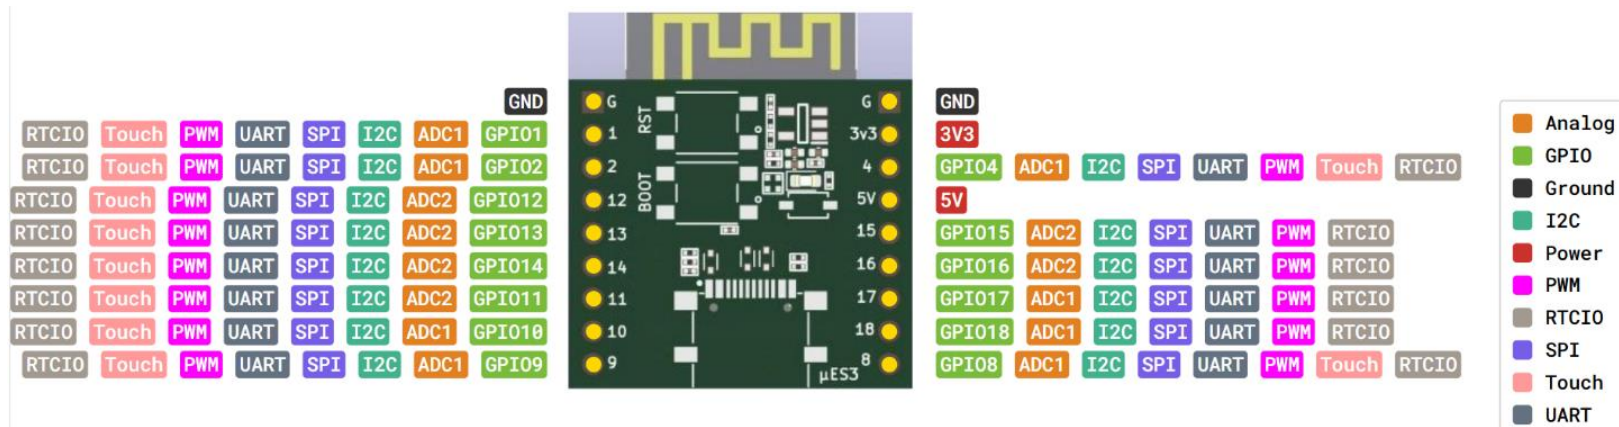

Module: *ESP32-S3 WROOM 1 N16R8 (16 MB Flash, 8MB PSRAM) module*

Applications: Smart IOT, Wearable applications, Speech/Voice recognition, Face recognition, Offline AI/ML, Neural network acceleration, Human-machine interface (HMI).

Datasheet: documentation.espressif.com/esp32-s3-wroom-1_wroom-1u_datasheet_en.pdf

Note: Any GPIO can be configured as I2C, SPI, I2S, PWM, UART and TWAI pins. GPIO 5 is configured as an onboard control/status LED.

Specifications:

Board dimension	2.7 x 2.4 cm
Processor	Xtensa Dual core 32-bit LX7 microprocessor with max frequency 240 MHz
ROM/SRAM	384 KB ROM/512 KB SRAM on-chip
Flash Memory/PSRAM	16 MB/8 MB
Wireless Communication	2.4 GHz Wi-Fi (802.11b/g/n), Bluetooth 5.0 (BLE)
IO Pins	14 GPIO pins, 5V power pin and 3.3V LDO output pin exposed.
Interface support	I2C, SPI, 12-bit ADC – 2 channels/14 Inputs, Touch, PWM, LCD, UART, USB 2.0 On-the-Go (OTG) support
Built-in LEDs	GPIO5 for control/status LED. Separate LED for power indication
Antenna	On-board PCB antenna
USB Programming	USB-C port with native USB programming
Switches	On-board BOOT and RESET buttons



MII INITIATIVE (Mu-ETronics Design)