

# **Charging Station for Electric Vehicles**

**A**

**Project Exhibition -1**

Submitted in partial fulfillment for the award of the degree of

**BACHELOR OF TECHNOLOGY  
In  
ELECTRICAL & ELECTRONICS ENGINEERING**

Submitted to

**VIT BHOPAL UNIVERSITY (M.P.)**



**VIT<sup>®</sup>**  
**BHOPAL**  
[www.vitbhopal.ac.in](http://www.vitbhopal.ac.in)

**Submitted by NILESH**

**(REGISTRATION NO.– 19BEE10026 )**

**Under the Supervision of**

**DR. OMPRAKASH PAHARI**

**SCHOOL OF ELECTRICAL & ELECTRONICS ENGG.  
VIT BHOPAL UNIVERSITY**

**BHOPAL (M.P.)-466114**

**May –2021**



**VIT BHOPAL UNIVERSITY BHOPAL (M.P.) 466114**

**SCHOOL OF ELECTRICAL & ELECTRONICS ENGG.**

### **CANDIDATE'S DECLARATION**

I hereby declare that the Dissertation entitled "CHARGING STATION FOR ELECTRIC VEHICLES" is my own work conducted under the supervision of Dr. Om Prakash Pahari, Assistant Professor, Electrical & Electronics Engineering department at VIT University, Bhopal.

I further declare that to the best of my knowledge this report does not contain any part of work that has been submitted for the award of any degree either in this university or in other university / Deemed University without proper citation.

NILESH

(19BEE10026)

This is to certify that the above statement made by the candidate is correct to the best of my knowledge.

Date: 08 May 2021

Guide Name: Dr. Om Prakash Pahari

Designation: - Assistant professor, SEEE VIT Bhopal University

-----  
Digital Signature of Guide

ii



**VIT UNIVERSITY BHOPAL (M.P.) – 466114**

**SCHOOL OF ELECTRICAL & ELECTRONICS ENGINEERING**

**CERTIFICATE**

This is to certify that the work embodied in this Project Exhibition -1 report entitled “**CHARGING STATION FOR ELECTRIC VEHICLES**” has been satisfactorily completed by **Mr. NILESH** Registration No.-**19BEE10026** in the School of Electrical & Electronics Engineering at VIT University, Bhopal. This work is a Bonafide piece of work, carried out under my/our guidance in the School of Electrical and Electronics Engineering for the partial fulfilment of the degree of Bachelor of Technology.

Dr. Om Prakash Pahari  
Assistant professor,  
SEEE VIT Bhopal University

-----  
Digital Signature of Guide

Forwarded by  
**Dr. Pallabi Sarkar**  
Program Chair

Approved by  
**Dr. Maheshwar .R**  
Professor & Dean

## **Acknowledgement**

First and foremost, I would like to express my deep and sincere gratitude to my guide, Prof. Om Prakash Pahari, Assistant professor, SEEE, VIT Bhopal University, and our program chair Dr. Pallabi Sarkar Asst. Professor, SEEE, VIT Bhopal University for offering me the opportunity to execute this project. Under their guidance and experience, I learned a lot about the various aspects in and around the project. They supported whenever needed, even during their busy schedule. It was indeed a privilege to work under these qualified visionaries.

I would like to extend my heartfelt thanks to the panel members Prof. Pallabi Sarkar, Prof. Susant Panigrahi, Prof. Jitendra Kumar Tandekar, VIT Bhopal University, for his timely suggestions and ideas to direct us into the right path towards success and to the completion of the project.

I am overwhelmed and grateful for the support and competition given by my fellow classmates.

I would like to give credit to my teammates Deepshikha Sen (19BEE10029), Anuradha Tiwari (19BEE10030), Radhika Gurjar (19BEE10027). It is because of their cooperation for the project, stimulation in the discussions, contribution with each of our ideas and effort, we were able to bring forth our project to reality.

.

## **EXECUTIVE SUMMARY**

The on-going technical development of charging technology by EV manufacturers has taken many varied courses to date, reacting to early research and product innovations. The management of charging networks is still in its infancy and a continued investment in quick charging infrastructure is needed in order to overcome some of the barriers to the introduction of EVs. Continuing developments in technology and competition in the marketplace are however likely to result in multiple types of charging infrastructure. This proliferation causes complication and confusion for those considering using EV, representing a significant barrier to market growth and investment. For example, a number of different rapid charging mechanisms currently exist across Europe, the US and Asia and also between the manufacturers operating within these areas. This is causing confusion amongst EV drivers and investors as to what charging equipment is required for which EV and how available this necessary infrastructure is to them in their geographic area and beyond. However, this paper has shown how ITS can be used to understand charging behaviour, to inform charging post operators about the most efficient operation of their network and EV drivers about how to get the most from their EV. For getting the output we use the MATLAB software.

## LIST OF SYMBOLS & ABBREVIATIONS:

A – Ampere

V – Voltage

SoC – State of Charge and Discharge

## LIST OF FIGURES

### Designing of charger :

Figure no.	Caption/title	Page no
1	Connection Control	12
2	DC to AC and AC to DC Converter with controller	13
3	Buck-Boost Converter with Controller	14
4	DC to DC converter with Battery controller	15
5	Switching controller	16
6	Wall Charger Connection Box	17
7	Bidirectional charger	18

### Output:

Figure no.	Caption/title	Page no
8	G2V Operation ( Switch mode 0)	19
9	V2G Operation ( Switch mode 1)	20
10	G2V Operation_ grid input ( Switch mode 0)	21
11	G2V Operation_ Battery output ( Switch mode 0)	22
12	V2G Operation_ Battery input ( Switch mode 1)	22
13	V2G Operation_ Grid Output ( Switch mode 1)	23

## Table of Contents

Front page	i
Candidate declaration	ii
Certificate	iii
Acknowledgement	iv
Executive summary	v
List of figures	vi
Contents	vii
 CHAPTER – I	 8
1. INTRODUCTION	8
2. OBJECTIVE	9
3. PROPOSED METHODOLOGY	9
CHAPTER - II	10
4. LITERATURE REVIEW	10
CHAPTER – III	11
5. LIST OF COMPONENTS	11
CHAPTER – IV	12-20
6. PRACTICAL IMPLEMENTATION	13-20
CHAPTER – V	21-24
7. RESULTS AND DISCUSSION	21
8. CONCLUSION AND FUTURE SCOPE	23
9. REFERENCES	24

## CHAPTER - I

### INTRODUCTION

- **Charging station:** An electric vehicle charging station is equipment that connects an electric vehicle to a source of electricity to recharge electric cars, neighbourhood electric vehicles and plug-in hybrids. Charging stations are also called electric vehicle supply equipment (EVSE), These stations provide special connectors that conform to the variety of electric charging connector standards.

Level 1 charging stations use a 120 volt (V), alternating-current plug and require a dedicated circuit, offering about 5 miles of range for every hour of charging.

Level 2 stations charge through a 240V, AC plug and require home charging or public charging equipment to be installed. Level 2 stations provide 10 to 20 miles of range for every hour of charging.

Level 3 chargers are also known as DC fast chargers. Level 3 uses a 480V, direct-current plug. They bypass the onboard charger and provide DC electricity to the battery via a special charging port. DC Fast Chargers provide up to 40 miles of range for every 10 minutes of charging but are not compatible with all vehicles.

- **Bidirectional EV charger:** Increase in electric vehicle mobility has encouraged the growth of vehicle to grid technology. Vehicle to grid technology allows bidirectional power flow between the battery of electric vehicle and the power grid. This allows peak load shaving, load levelling, voltage regulation and improvements of power system stability.



Implementation of the vehicle to grid technology requires dedicated electric vehicle battery charger, which allows bidirectional power flow between power grid and electric vehicle battery.

## **OBJECTIVE**

- Study of different type of charging station.
- Simulate the charging station using MATLAB.

## **PROPOSED METHODOLOGY**

- **Bidirectional charging: -**
  - **Grid to vehicle:** power flow between the power grid and battery of electric vehicle.
  - **Vehicle to grid:** power flow between the battery of electric vehicle and the power grid.

## **CHAPTER - II**

### **LITERATURE REVIEW**

This chapter focuses on existing literature related to key concepts of this report's research and addresses the following research objectives:

#### **EV Charging Station Progress:**

- Planned
- Actual Implementation Effectiveness

#### **Barriers to EV charging station:**

- Power Availability
- Equipment reliability
- Tariff charged to users

#### **Ways to overcomes Barriers:**

- Design of charger

## CHAPTER - III

### LIST OF COMPONENTS FOR SIMULATION

- |                              |                               |                            |
|------------------------------|-------------------------------|----------------------------|
| 1) power G i                 | 2) Three phase source         | 3) 3ph V-I measurement.    |
| 4) 3ph series RLC load       | 5) Constant                   | 6) Goto                    |
| 7) From                      | 8) Scope                      | 9) Display                 |
| 10) Battery                  | 11) Bus selector              | 12) Mux                    |
| 13) Demux                    | 14) Connection port           | 15) In port                |
| 16) Outport                  | 17) Ideal switch              | 18) Logical operator       |
| 19) Universal bridge         | 20) PWM generator (2 level)   | 21) 3ph series RLC branch. |
| 22) 3ph breaker              | 23) Power (3ph instantaneous) | 24) PLL(3ph)               |
| 25) Terminator               | 26) Gain                      | 27) Rate limiter           |
| 28) MATLAB func.             | 27) Voltage measurement       | 30) Series RLC branch      |
| 31) MOSFET                   | 32) Sum                       | 33) PID Controller         |
| 34) PWM generator<br>(DC-DC) | 35) Switch                    | 36) Repeating sequence.    |

## CHAPTER - IV

### PRACTICAL IMPLEMENTATION

#### Connection Control:

Connection Control allows you to limit the devices that can connect to the SMTP Server. This can be useful if you are using the service as a relay for locally installed applications by restricting connections to that of the local host. You can alternatively prevent specific computers from connecting to the server. Connections can be evaluated based on a single IP address, a masked IP range, or a domain name.


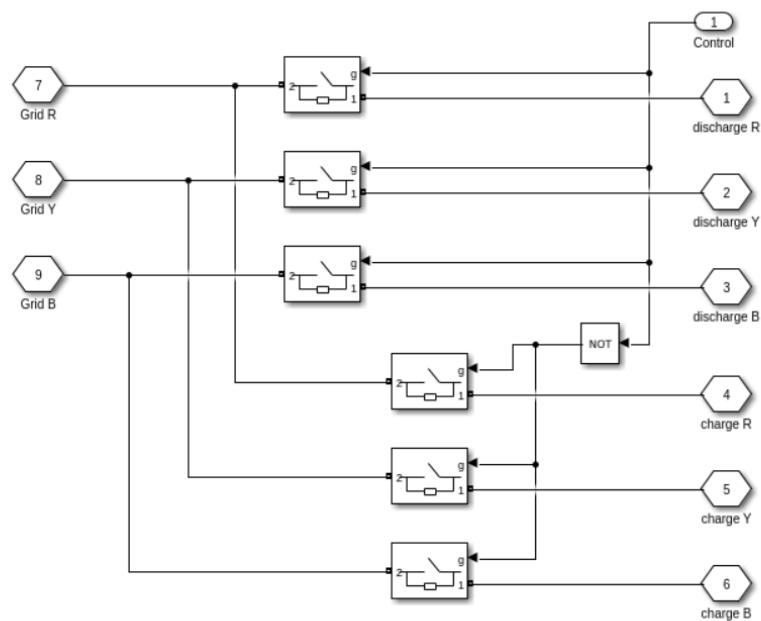


Figure 1: Connection Control

## DC to AC and AC to DC Converter with controller:

The system needs a considerable number of power electronics converters and electronic controllers in order to regulate and optimize the power between the components. A DC/AC converter is used to connect the battery to the flywheel low voltage side. An AC/DC/AC converter is used to connect the flywheel high voltage side to the wheel motor.

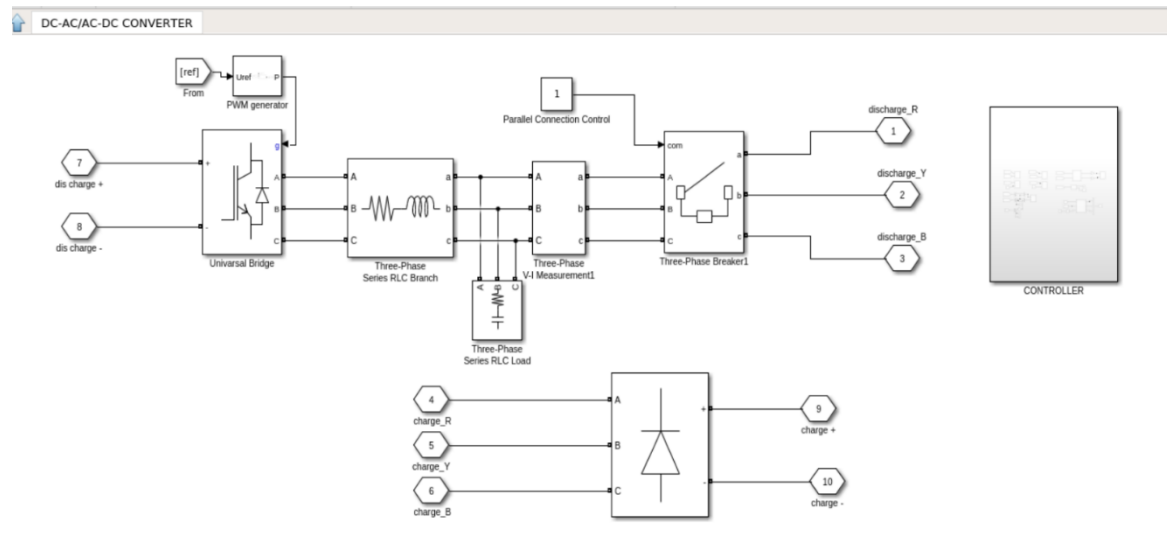


**Figure 2: DC to AC/AC to DC Converter with controller**

## Buck-Boost Converter with Controller:

buck/boost synchronous dc-to-dc controllers utilize an external power switch to deliver high currents with excellent efficiency. With their unique external four MOSFET buck-boost switch combination, they can seamlessly transition from step-down mode, through 100% dropout operation, and then to step-up mode to allow a fixed output voltage even when the input voltage fluctuates above or below the output.

They are particularly well suited to automotive applications where the input voltage can vary dramatically during stop/start, cold crank and load dump scenarios.

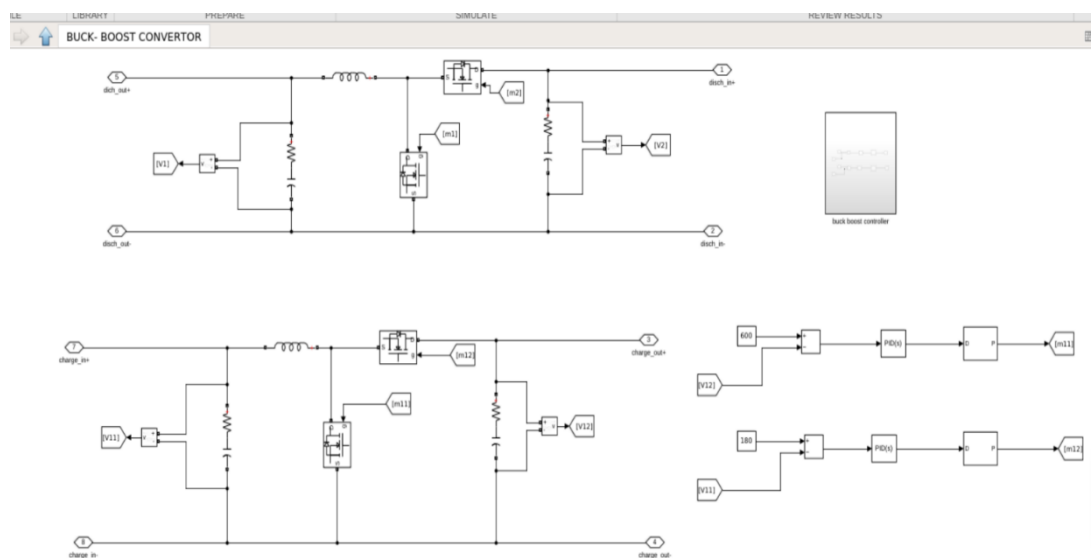


**Figure3: Buck-Boost Converter with Controller**

## DC to DC converter with Battery controller:

Electrical systems that require energy transfer between one voltage level to another, as the voltage required may be different to the voltage supplied. To achieve energy-efficient conversions, switch-mode conversion is used.


The three-generic switch-mode DC/DC converters that will be explained are Buck, Boost and Buck-Boost DC/DC converters as well as the PWM required to control them.

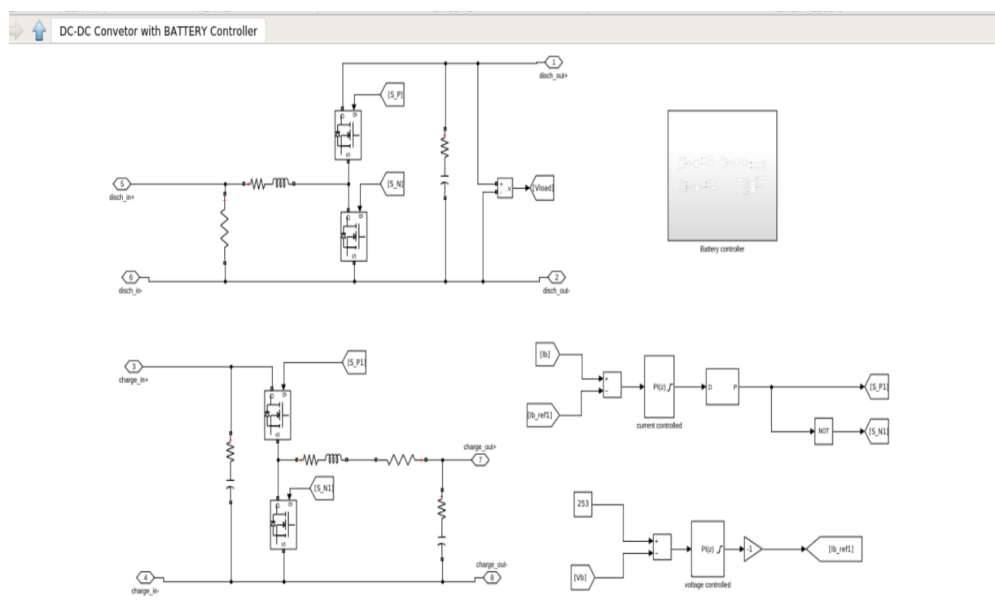

**Figure 4: DC to DC converter with Battery controller**

## Switching controller:

A switching controller is an IC that controls the timing of the switching of a power transistor, usually a FET (field-effect transistor), used in a switching regulator. In some switching regulators, the FET is a discrete component, external to the controller, while in others, the FET is located in the same IC as the switching controller.

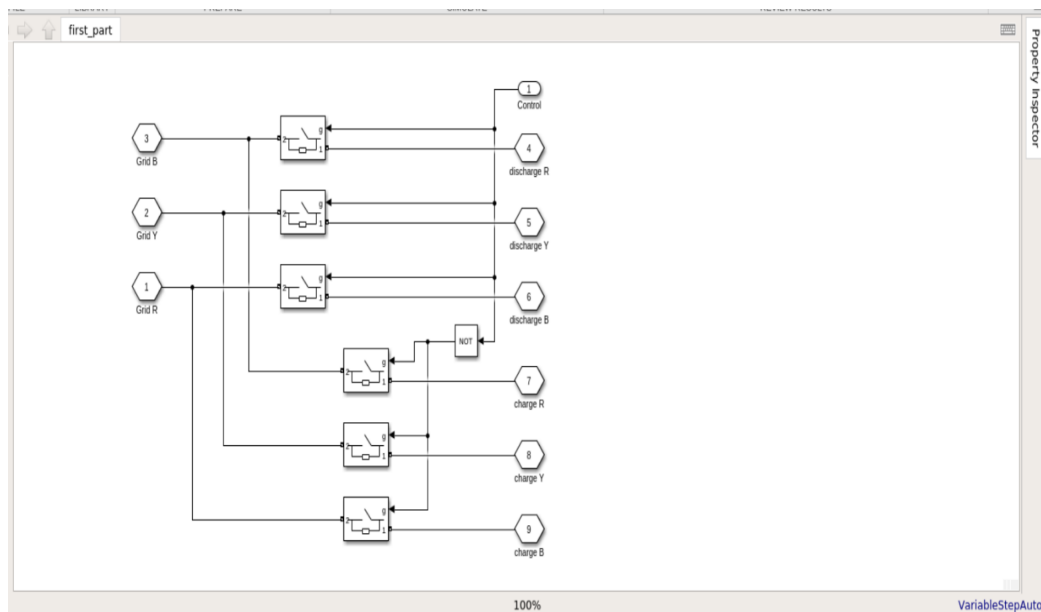


**Figure 5: Switching controller**



## Wall Charger Connection Box:


The Wall Charger Connection Box is a combination of all boxes like Connection Control, DC to AC and AC to DC Converter with controller, Buck-Boost Converter with Controller, DC to DC converter with Battery controller, switching controller where each box connects to another box with respect to their input output port.

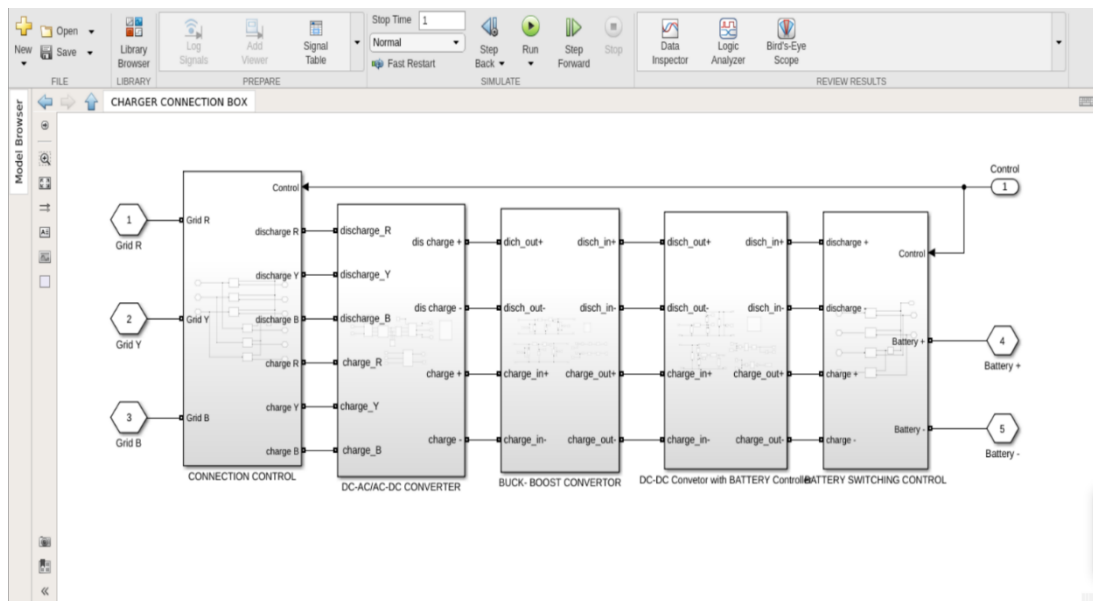

**Figure 6: Wall Charger Connection Box**

### Bidirectional Charger:

the *bidirectional charger* selects the *charge* or discharge mode, based on the indication via CAN communication. Output power and operation mode of the *charger* is arranged by the *charge* control ECU, in consideration of the requirements from the EVSE and SOC of the on-board battery.

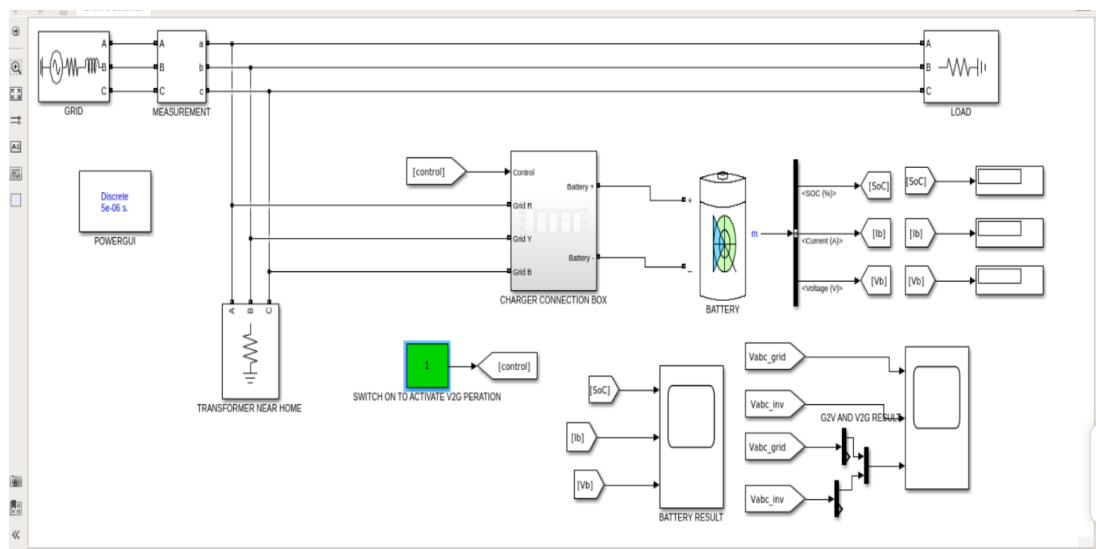


### Figure 7: Bidirectional Charger

## SIMULATION DIAGRAMS

Here we are using constant box as a switch where when it show zero then it work for grid to vehicle supply and at one it work for vehicle to grid supply.


**Grid to vehicle operation:** When we charge battery (G2V operation), soc will increase and battery current will be negative, battery voltage will be positive.

there is no inverter voltage

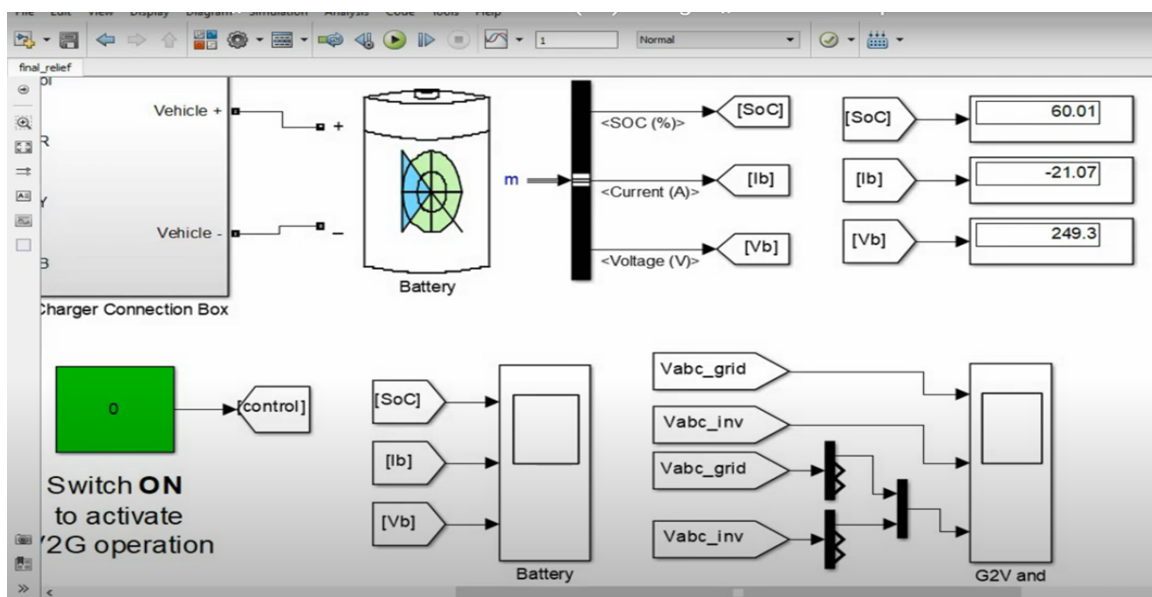

**Figure 8:G2V Operation ( Switch mode 0)**


**Vehicle to grid operation:** During V2G operation soc will decrease and battery current and battery voltage will be positive.

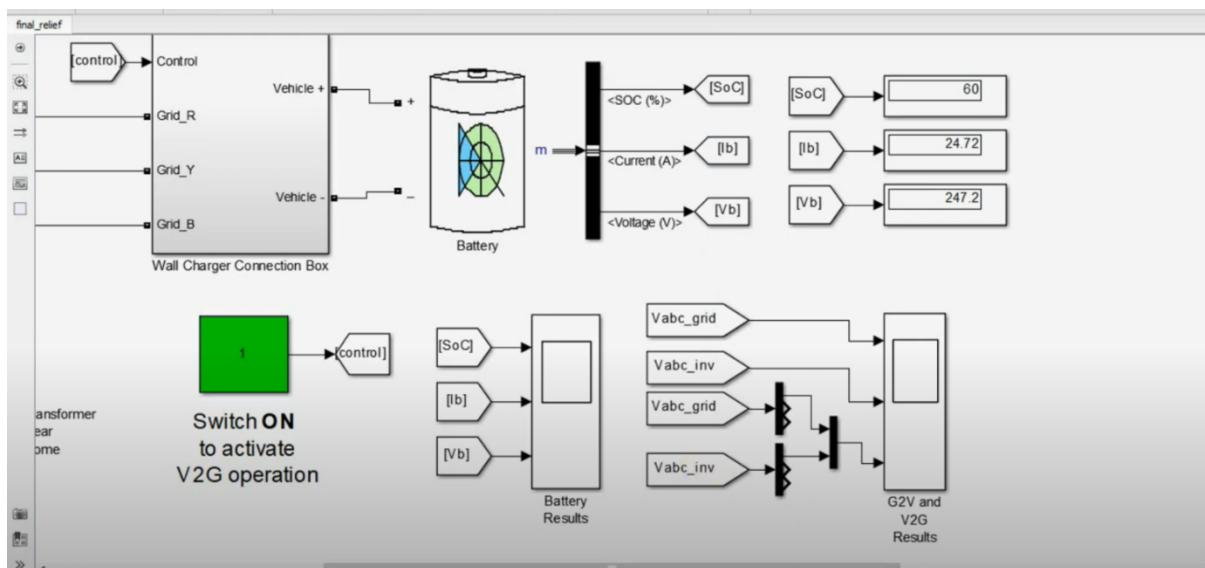


**Figure 9:V2G Operation ( Switch mode 1)**

## CHAPTER - V


### RESULT AND DISCUSSION:

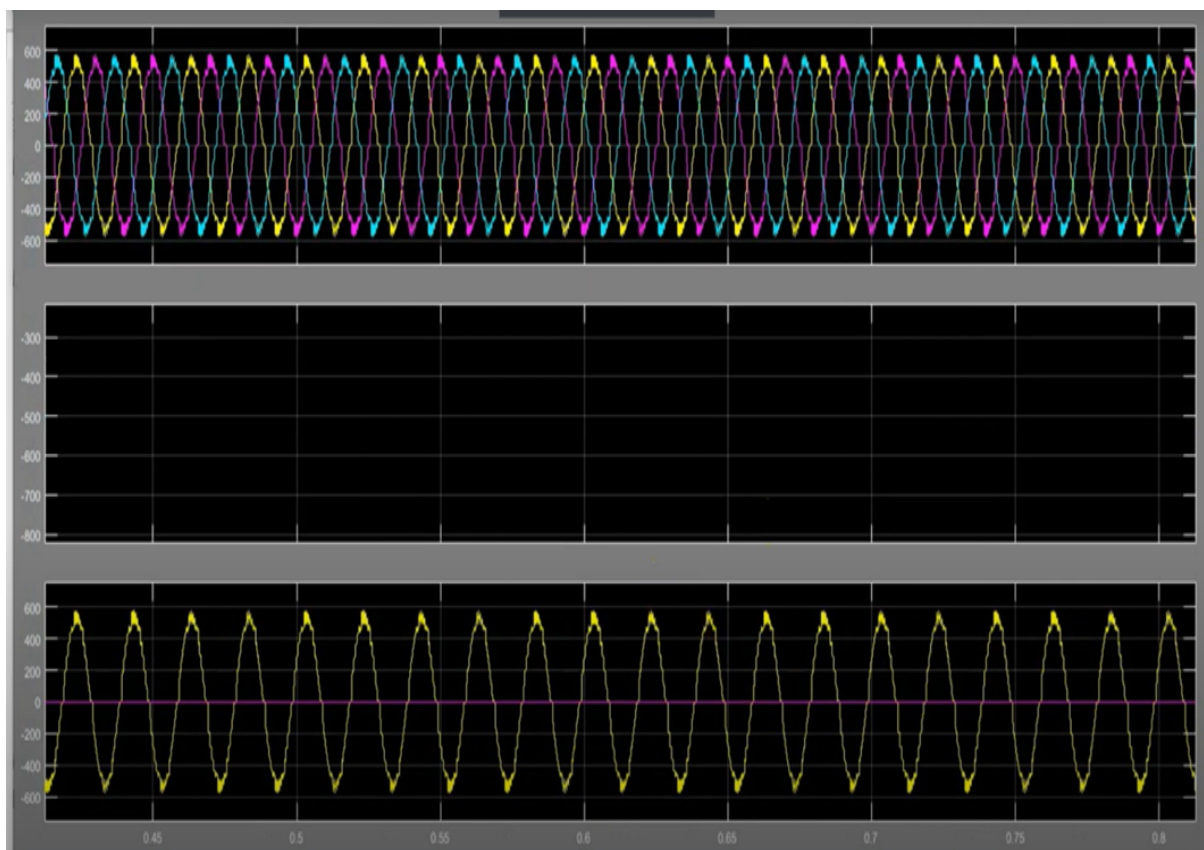


**Figure 10:G2V Operation\_ grid input ( Switch mode 0)**

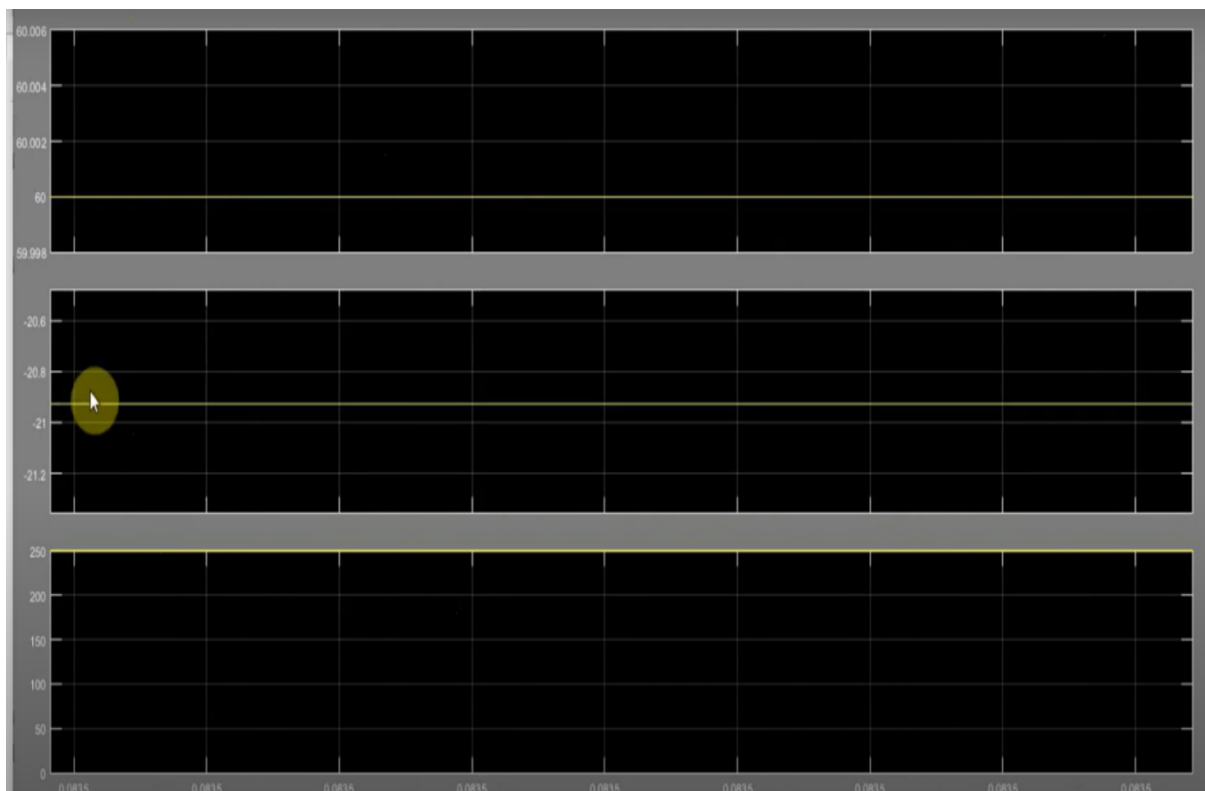

**Figure 11:G2V Operation\_ Battery output ( Switch mode 0)**

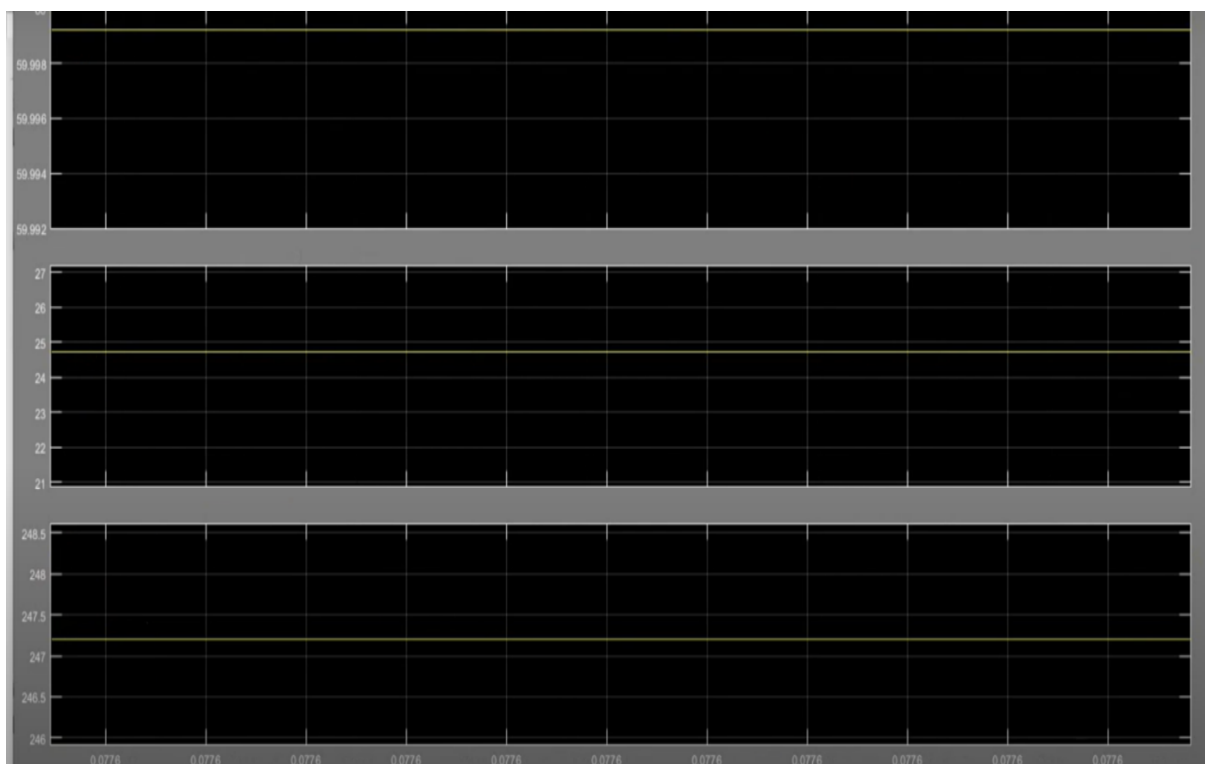

**Figure 12:V2G Operation\_ Battery Input ( Switch mode 1)**

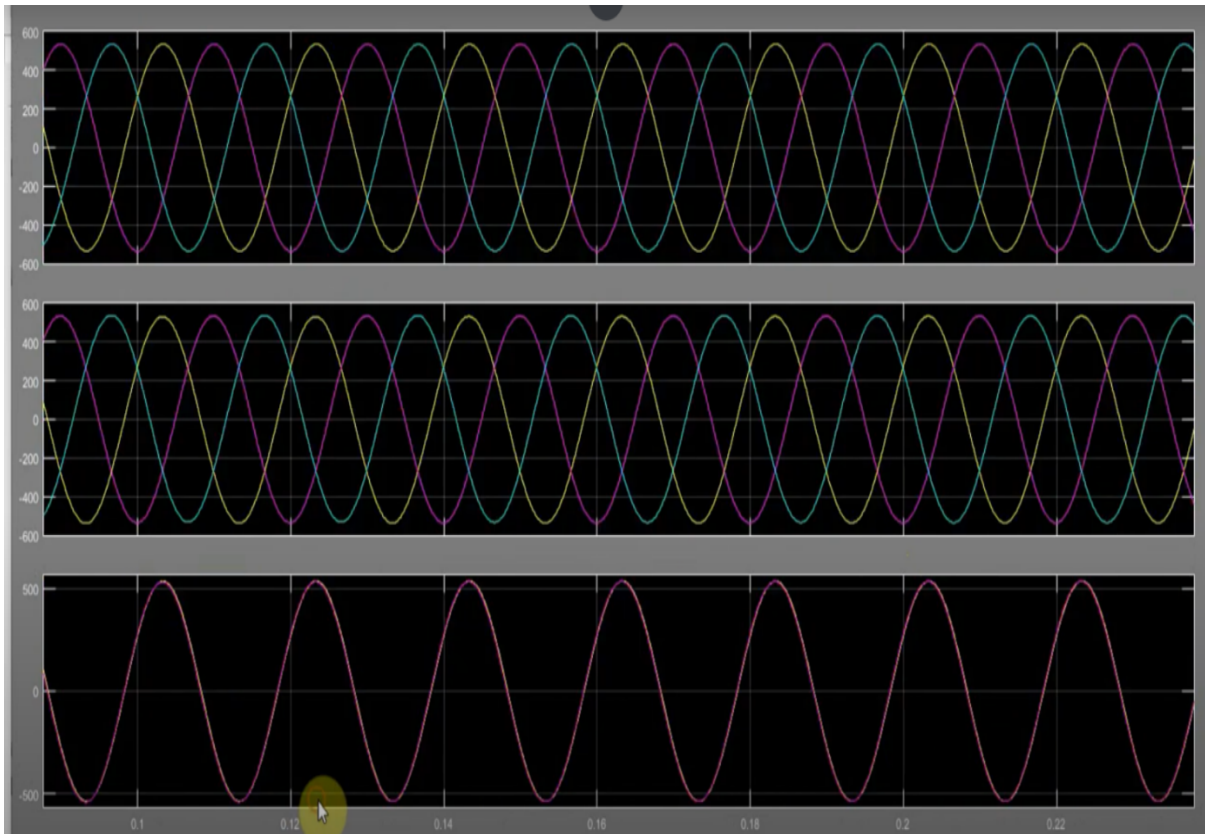

**Figure 13:V2G Operation\_ Grid Output ( Switch mode 1)**

### **PRESENT AND FUTURE SCOPE OF PROJECT:**

Design the charging station of different level where at a same time we can charge more than 100 electrical Vehicle with low cost and minimum time.

### **CONCLUSION**

This report proposes to the effectiveness of EV Charging Station where we can do fast charging, at same time we can charge one and more than electrical vehicle 30-40minute time duration.

On the conclusion point:

- Changed behavior is important for transition towards e-mobility.
- Customized regional and city planning for e-mobility.
- Develop smart charging systems

## REFERENCES

- ( [https://www.researchgate.net/publication/320410391\\_A\\_Study\\_of\\_Electric\\_Vehicle\\_Charging\\_Station\\_Installation\\_Progress\\_in\\_Malaysia](https://www.researchgate.net/publication/320410391_A_Study_of_Electric_Vehicle_Charging_Station_Installation_Progress_in_Malaysia)) proposed methodology.
- (<http://www.eai.in/blog/2018/12/components-of-ev-charging-infrastructure.html>) component of EV charging.
- (<https://pdiwan.medium.com/slow-fast-and-super-ev-chargers-conundrum-d35ea0da5a87>) DC fast charging.
- Boook: Power Electronics by Ps bimbhra ( design of convertor)
- Matlab for simulation