






左电机驱动

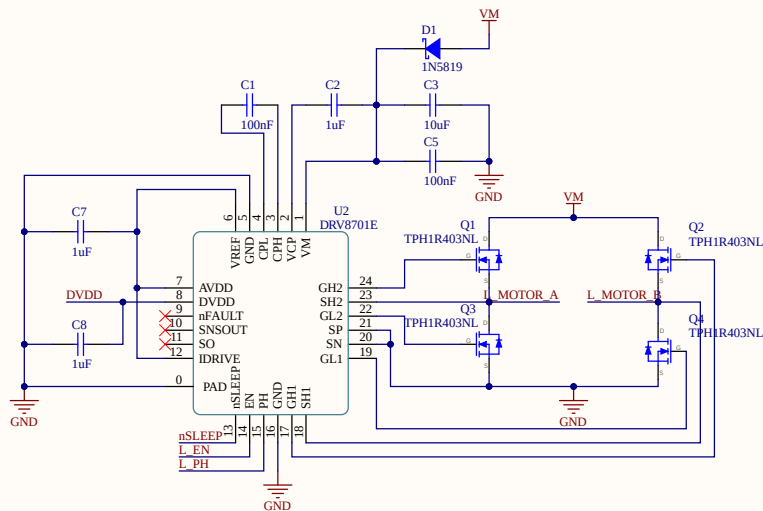


使能开关与电源指示

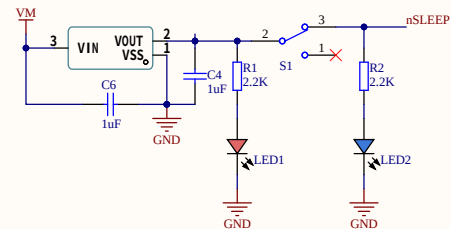

左电机接口 右电机接口

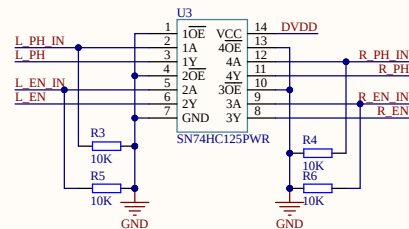


缓冲电路




PH:对应PCB上DIR
EN:对应PCB上PWM

信号接口

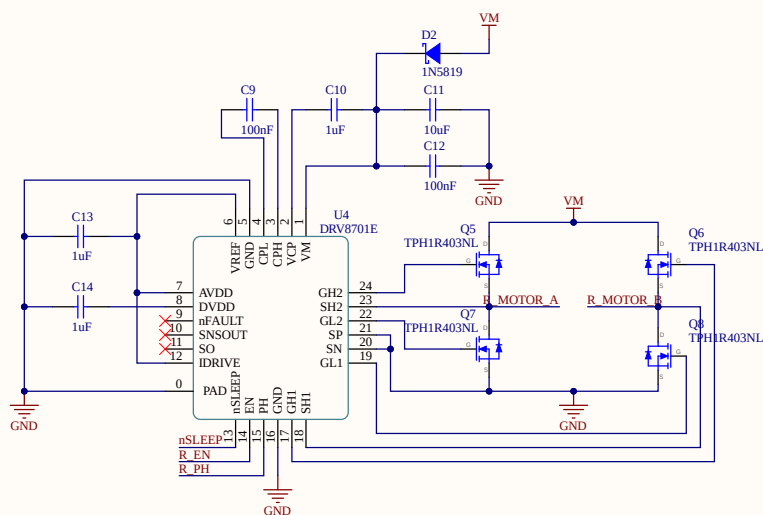

右电机驱动



主电源接口



固定孔

Comment	Description	Designator	Footprint	LibRef	Quantity
100nF $\pm$ 10% 50V	贴片电容	C1, C5, C9, C12	CAPC2012[0805]S-N	Cap-Chip_1	4
1uF $\pm$ 10% 25V	贴片电容	C2, C4, C6, C7, C8, C10, C13, C14	CAPC2012[0805]S-N	Cap-Chip_2	8
10uF $\pm$ 10% 25V	贴片电容	C3, C11	CAPC2012[0805]S-N	Cap-Chip	2
220uF 25V	Polarized Capacitor (Radial)	C15	CAP-E-S 6.3	Cap-Elect	1
1N5819	肖特基二极管 Diode	D1, D2	SOD-123-L	Diode Schottky	2
	Typical Chip LED	LED1	LED_0805	LED Chip Red	1
Blue	Typical Chip LED	LED2	LED_0805	LED Chip Blue	1
KF/WJ/DG 30x connector	接线端子 2Pin	P1, P2	KF/WJ/DG 301-2p-5.0mm	KF/WJ/DG 30x	2
Header 3X2	Header, 3-Pin, Dual row	P3	HDR2X3	Header 3X2	1
TPH1R403NL	东芝 N沟 MOS	Q1, Q2, Q3, Q4, Q5, Q6, Q7, Q8	DFN5x6	TPH1R403NL	8
2.2K $\pm$ 1%	贴片电阻	R1, R2	R0805	Res-Chip	2
10K $\pm$ 1%	贴片电阻	R3, R4, R5, R6	R0805	Res-Chip_1	4
SW-SPDT	单刀双掷开关 3脚船型、钮子、拨动开关 SPDT Subminiature Toggle Switch	S1	SS12D10	SW-SPDT	1
LR8341A-T33		U1	SOT-23-3L_L2.9-W1.6-P1.90-LS2.8-BL	LR8341A-T33	1
DRV8701E	DRV8701E Ti全桥驱动芯片	U2, U4	QFN24-4x4	DRV8701E	2
SN74HC125PWR	三态输出的四路缓冲器 TSSOP-20	U3	TSSOP-14	SN74HC125PWR	1
XT60		U5	CONN-TH_XT60	XT60	1