

Solar Turbines <i>A Caterpillar Company</i>	PGM130 ANCILLARY CABLES ENTRY		Drawing nr. 4M381-2035028
rev. 01 – 05.12.2022	Created : F. LAZZARI	Appr. : T.BOGNUDA	Page 1 of 4

CARTER1, CARTER2

ANCILLARY CABLES ENTRY LAYOUT

Cables entry layout instruction is provided to simplify the Cable glands installation on the ANCILLARY SYSTEM for the packager. Guidance clarifies the installation position of the components and the different location of the penetration points (PP) for the cable's entry. This document doesn't replace any technical specification or standards. For any technical reference concerning the different devices, the Solar SCD or the original manufacturer manuals, shall be used.

Cables entry position on the Ancillary System are grouped and defined "penetration Points" (PP).

Reference code used for the Cables Entry Typos Groups:

PAxx	Cable entry with metallic ATEX glands
PBxx	Cable entry with black plastic ATEX glands
PCxx	Entry/passage with accessory devices
PSxx	Cable entry with metallic glands, for one cable
PMxx	Cable entry with metallic glands, for multiple cables


00	10.04.2026	First Issue	Byrtus	Bergamaschi	Bergamaschi
Rev.	Date	Modifications	Prepared	Checked	Approved

PGM130 ANCILLARY COMPACT – CABLES ENTRY POINT POSITION

Filter structure access stairs may be left LH (as shown) or right RH

Table 3 See next pages for table details


Position	Entries quantity	Thread Type
PP20	2	M32x1.5
PP22	2	M32x1.5
PP30	1	M32x1.5
PP32	1	M32x1.5

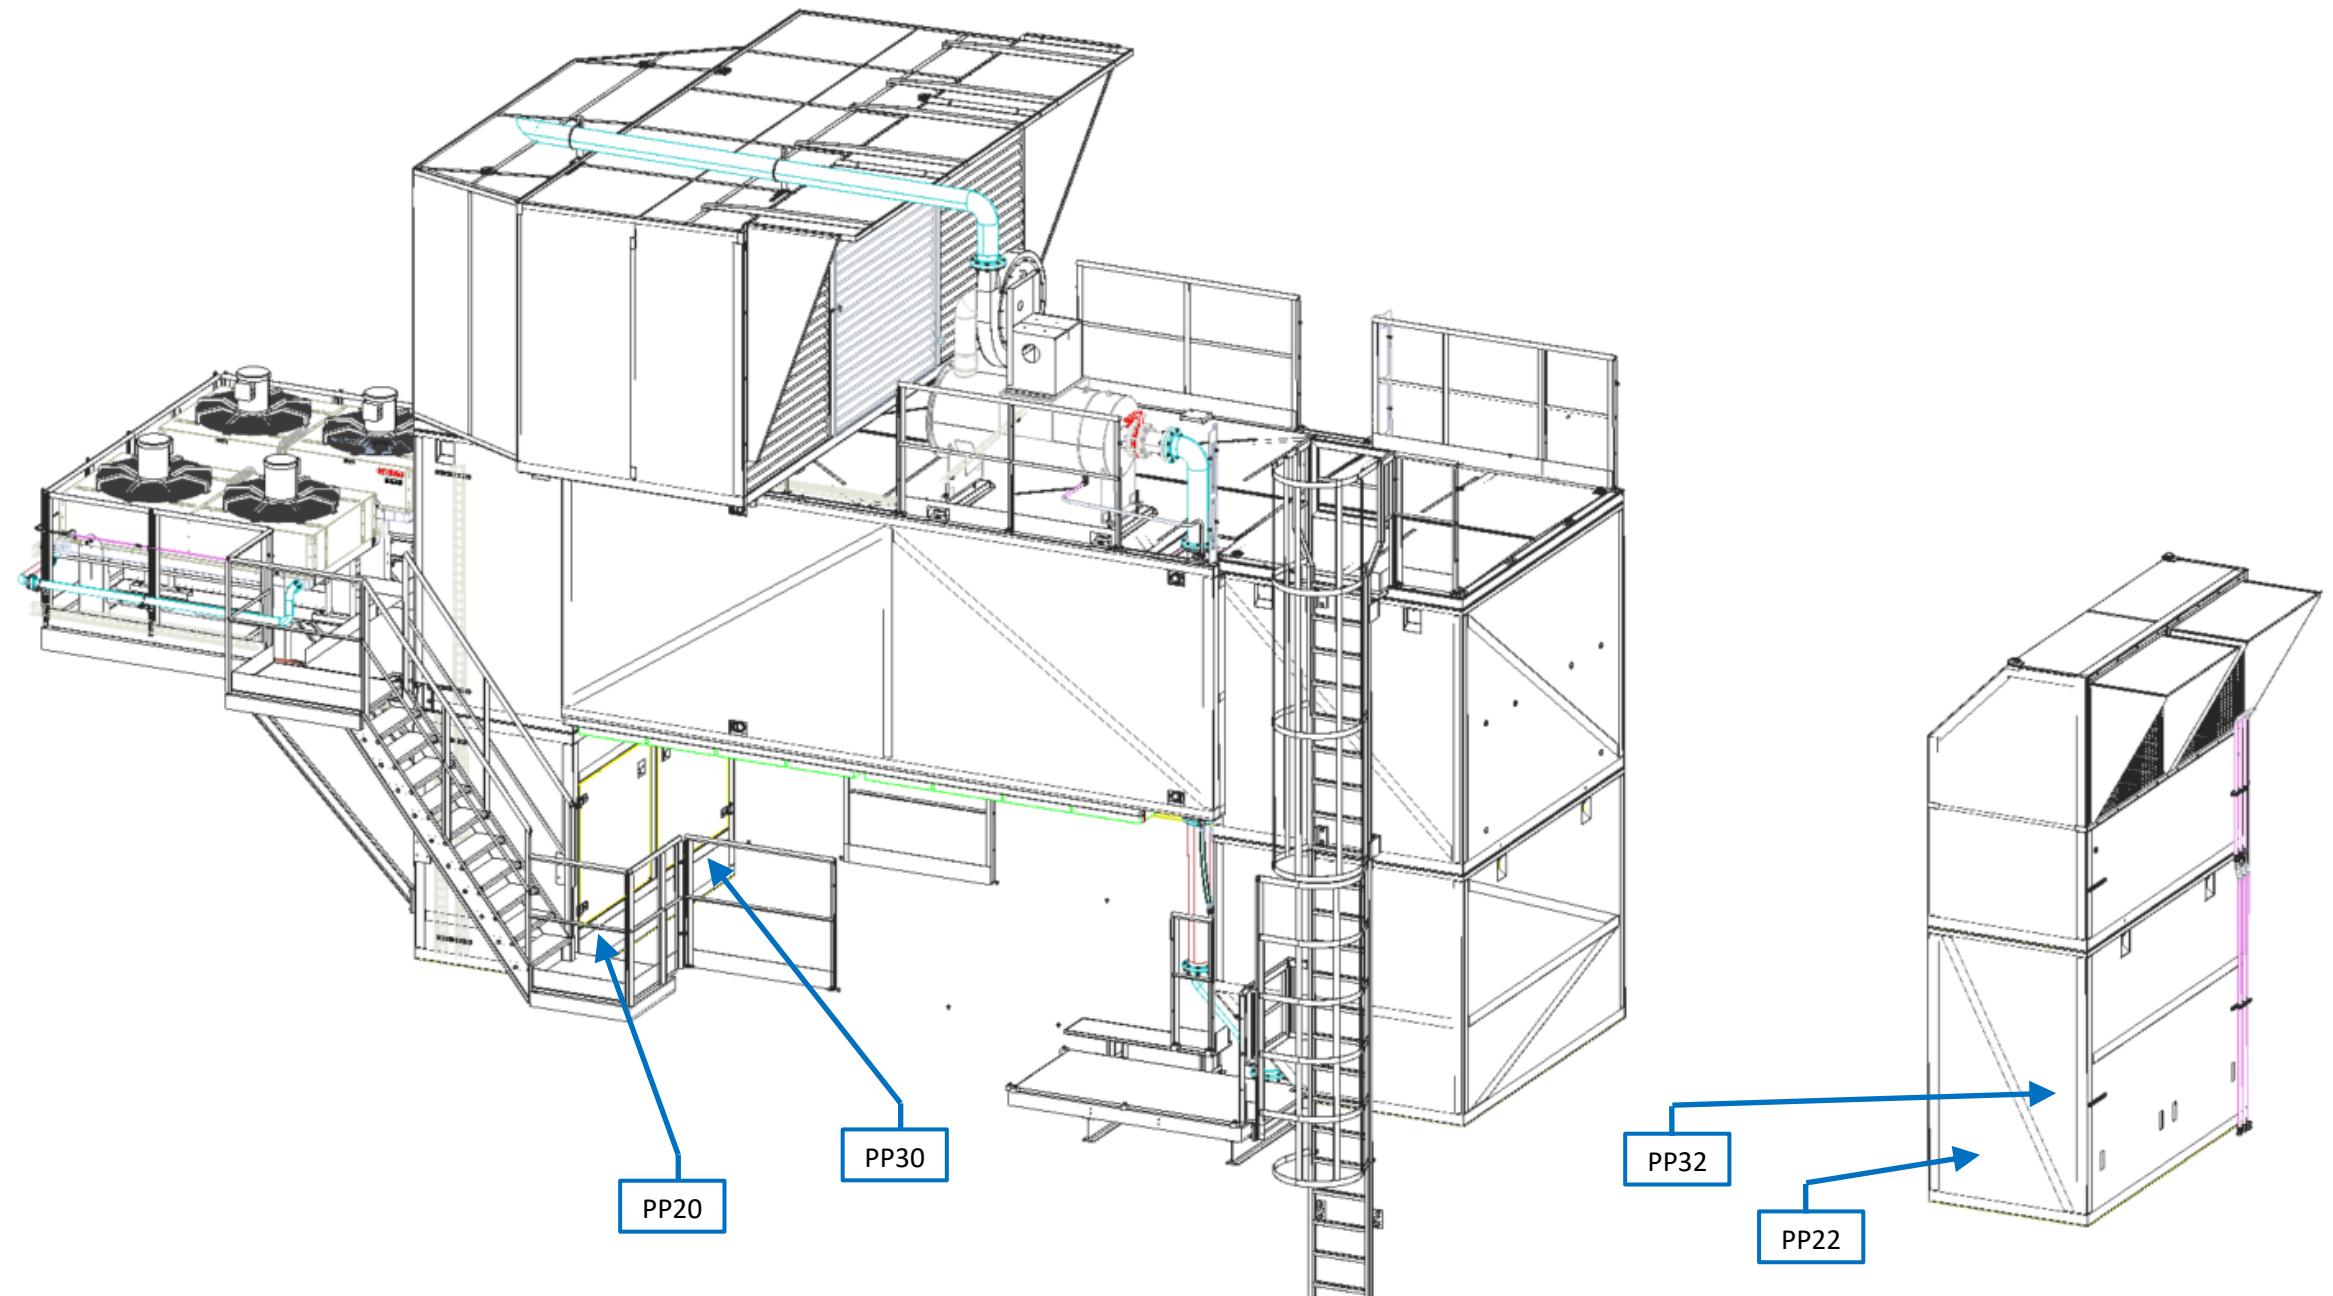

Enclosure Ventilation Inlet/Outlet ducts - Cables entry description

Table 4

Pos.	Qty	Ref.	Thread Type	Enclosure Outside Cable entry Typo	Enclosure Inside Cable entry Typo	Cable TAG	Notes
PP20	1	A	M32x1.5	1955399-25 1955399-83	NA	WXM6261	Enclosure inlet vent Fan #1
	1	B	M32x1.5	1955399-25 1955399-83	NA	WXM6271	Enclosure inlet vent Fan #2
PP22	1	A	M32x1.5	1955399-25 1955399-83	NA	WXM6281	Enclosure outlet vent Fan #1
	1	B	M32x1.5	1955399-25 1955399-83	NA	WXM6291	Enclosure outlet vent Fan #2
PP30	1	A	M32x1.5	1955400-30 1955399-83	NA	WXS6261	Enclosure inlet damper #1 control
						WXS6271	Enclosure inlet damper #2 control
						WXZ6261	Enclosure Inlet damper #1 position
						WXZ6271	Enclosure Inlet damper #2 position
PP32	1	A	M32x1.5	1955400-30 1955399-83	NA	WXS6280	Enclosure outlet dampers control
						SPARE	SPARE
						WXZ6281	Enclosure outlet damper #1 position
						WXZ6291	Enclosure outlet damper #2 position

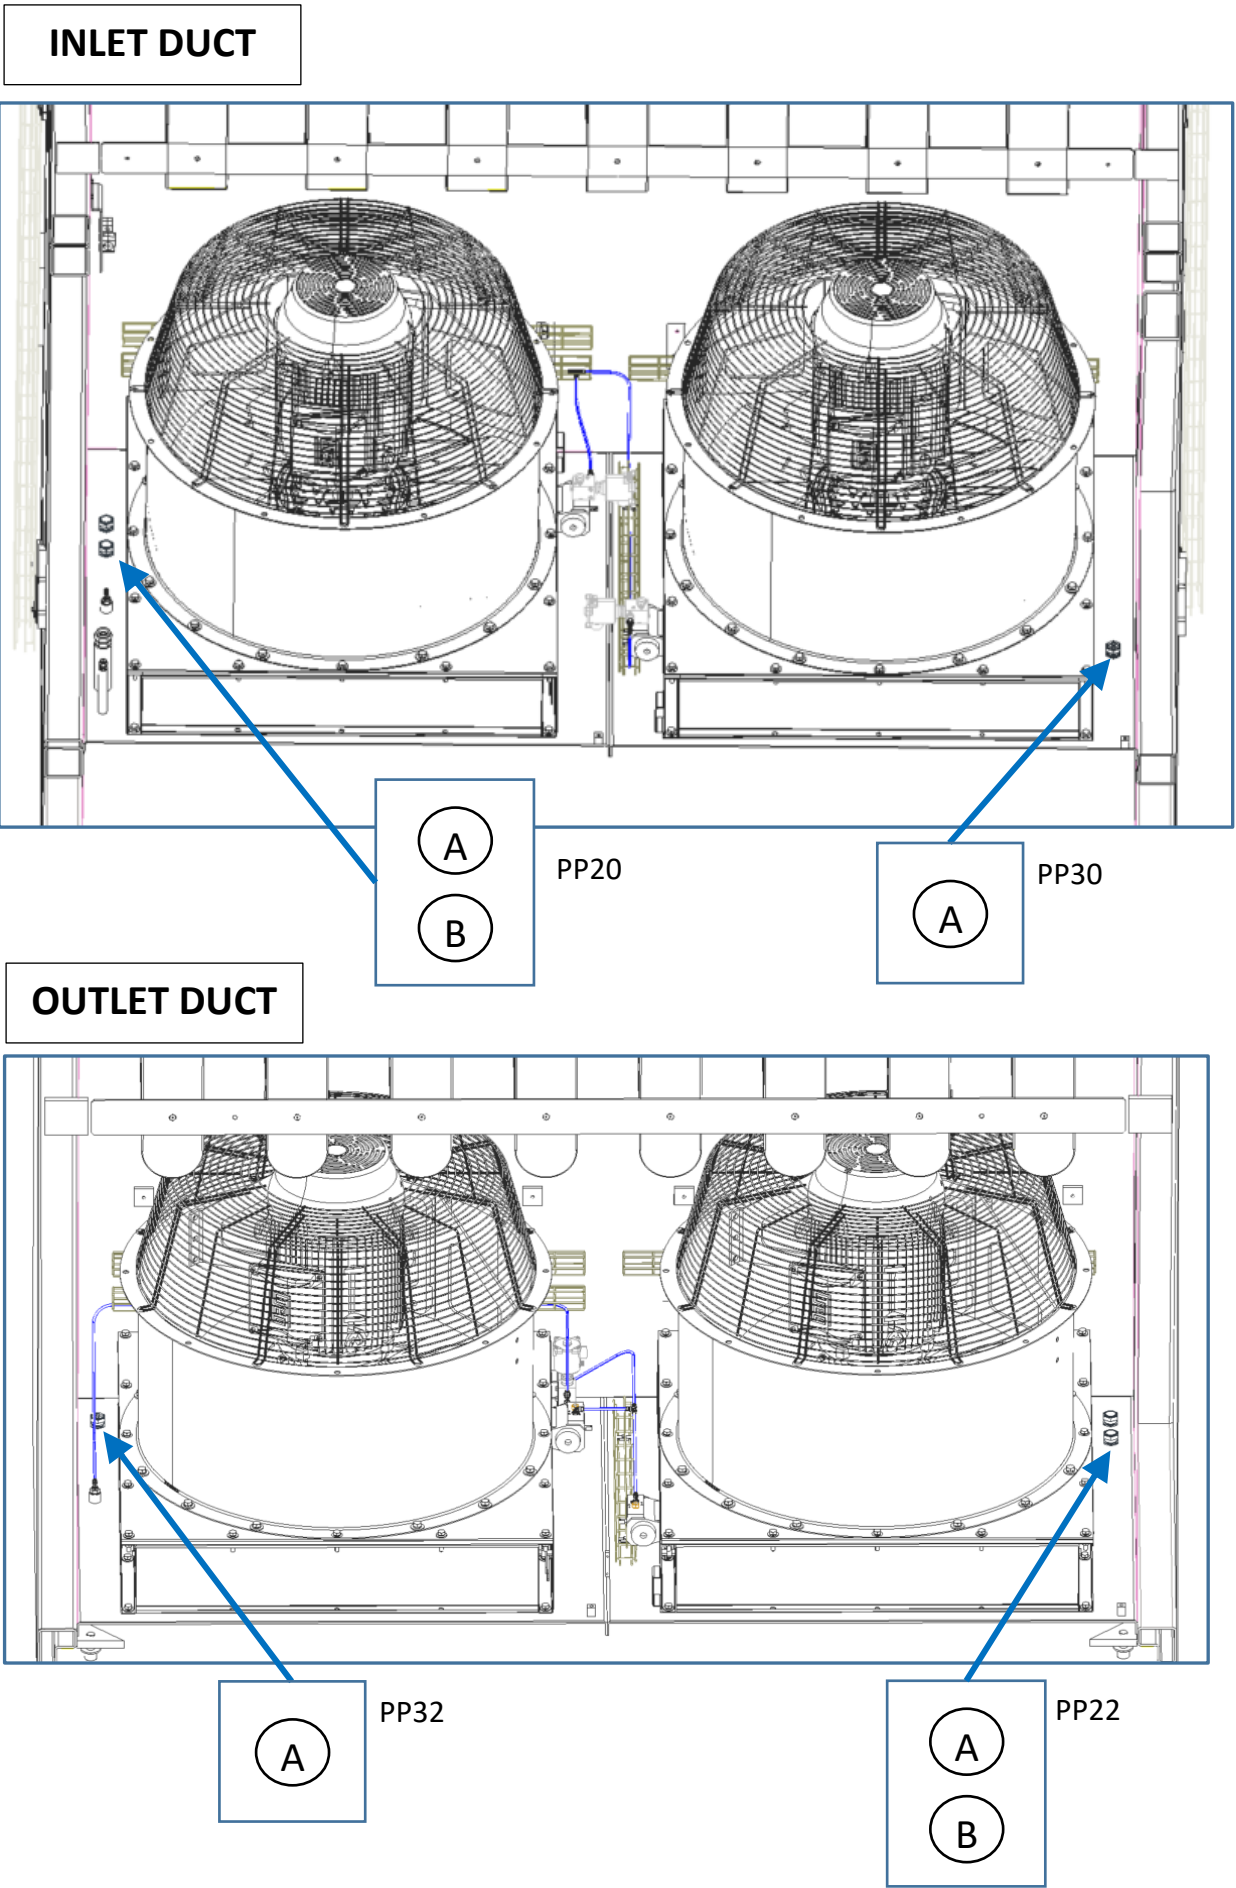

ENCLOSURE AIR INLET CABLES ENTRY TABLE PER TYPO

ENCLOSURE AIR INLET CABLES ENTRY TABLE PER PART NUMBER

o

PP20+22+30+32	GLAND,ENCL VENT	THREAD	TYPO	QTY
	METALLIC CABLE GLAND, SINGLE CABLES	M32		4
	METALLIC CABLE GLAND, MULTIPLE CABLES	M32		2

2441014-2100	KIT,GLAND,ENCL VENT	QTY	MFCR	MANUFACTURER PN
1955399-25	GLAND,THRU,M32, single cable	4	Hummel AG	1.609.3200.30
1955399-83	LOCKING NUT,M32	6	Hummel AG	1.161.3200.50
1955400-30	GLAND,THRU,M32, Multiple cables	2	Hummel AG	1.609.3200.50 + 1.089.2901.19

ANCILLARY FILTER HOUSE CABLES ENTRY TABLE PER TYPO

PP50 or 60 or 70	GLAND,ANCILLARY	THREAD	TYPO	QTY
	METALLIC CABLE GLAND, SINGLE CABLES	M25		2
	METALLIC CABLE GLAND, MULTIPLE CABLES	M32		1

ANCILLARY FILTER HOUSE CABLES ENTRY TABLE PER PART NUMBER

2441014-2200	KIT,GLAND,ANCILLARY	QTY	MFCR	MUNUFACTURER PN
1955399-5	GLAND,THRU,M25, Single cable	2	Hummel AG	1.609.2500.51
1955399-92	LOCKING PLUG for M25	2	Hummel AG	1.280.0021.00
1955400-30	GLAND,THRU,M32, Multiple cables	1	Hummel AG	1.609.3200.50 + 1.089.2901.19
1955400-53	LOCKING PINS 8MM	4	Hummel AG	AB89-PV080H

ANCILLARY (LH) FILTER HOUSES CABLES ENTRY TABLE PER TYPO

PP51 or 61 or 71	GLAND,ANCILLARY	THREAD	TYPO	QTY
	METALLIC CABLE GLAND, MULTIPLE CABLES	M25		1

ANCILLARY FILTER HOUSES (LH) CABLES ENTRY TABLE PER PART NUMBER

2441014-2300	KIT,GLAND,ANCILLARY	QTY	MFCR	MUNUFACTURER PN
1955400-21	GLAND,THRU,M25, Multiple cables	1	Hummel AG	1.609.2500.50 + 1.089.2102.19
1955400-53	LOCKING PINS 8MM	2	Hummel AG	AB89-PV080H