

WeGoodCharger APP User Manual

1. Download the "WeGoodCharger" APP.

You can scan the QR code with your browser to download.



Android download QR



Apple download QR

You can also copy the link to your browser to download:

Android:

<https://ev.weguyun.com/device/downUrl>

Apple:

Search "WeGoodCharger" in the App Store or visit

<https://apps.apple.com/cn/app/wegoodcharger/id6466698087>


Note:

- Please allow and trust this application when downloading. If the download is blocked by Google Play, try uninstalling Google Play and re-downloading WeGoodCharger.
- Go to phone settings → turn on Bluetooth, and allow nearby devices and location permissions for 'WeGoodCharger' in "Apps & notifications", "Application manager", or "Privacy and security".

Language support:


Chinese, English, French, Spanish, Russian, Hebrew, Portuguese, Thai, Japanese, Italian, German, Danish, Arabic, Farsi, Norsk, Svenska.

To change the app language, go to Profile > Language.

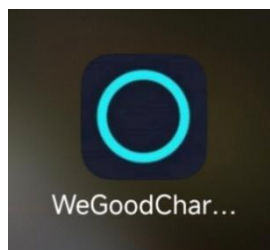


2. Sign Up & Log In.

- Open the APP → Tap "Sign Up" → Enter email and password → Tap "Register" → Complete verification.
- Enter your email and password → Tap "Log In" to enter the Home page.
- If you forget your password, Tap "Forgot Password?" → Reset via email verification.

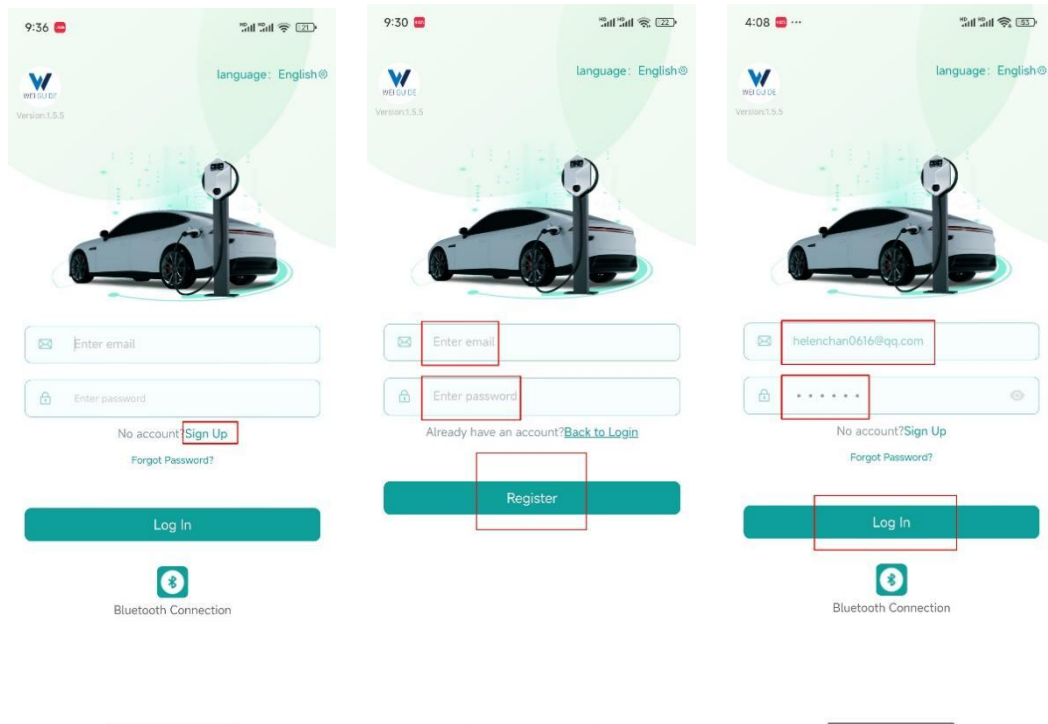


3. Bluetooth connection.


- Turn on the power of the device → Enter the "WeGoodCharger" application → Tap "Bluetooth Connection" → Select a device whose name starts with "WGD" from the list. You can also tap "BLUETOOTH" on the Home page after logging in to your account.

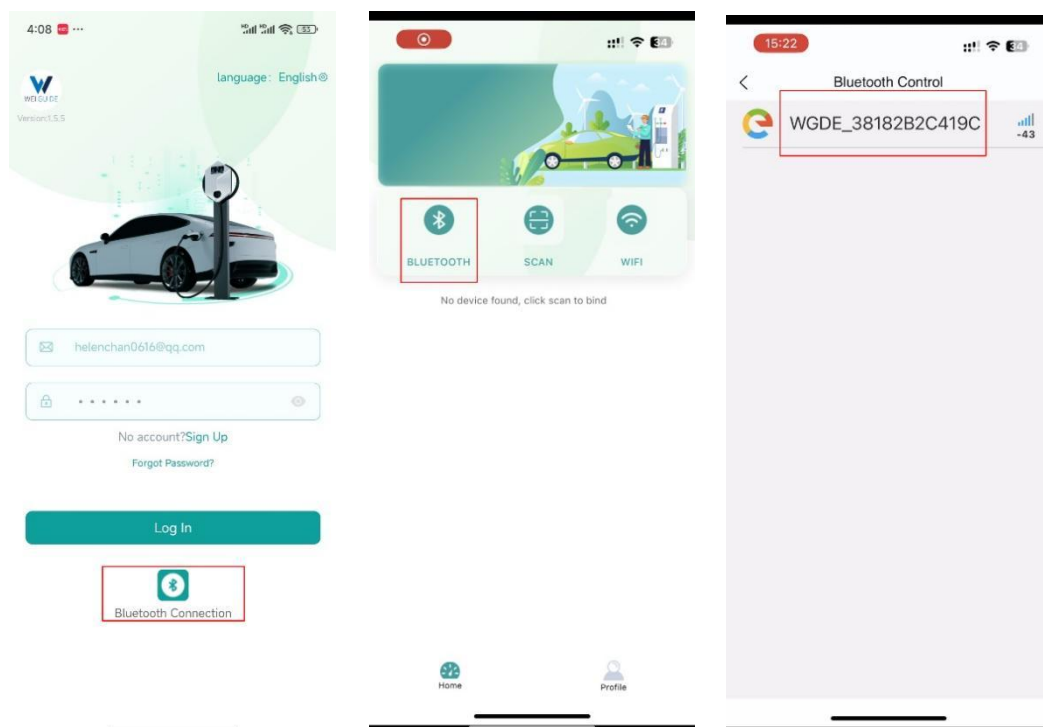

- Enter the default 6-digit Bluetooth password "123456" for the first time → Successfully connected to Bluetooth → When the message 'Please change the password' appears → Set a new 6-digit password **without number "0"** to ensure security.
Important: If you forget your Bluetooth password, contact the seller to request a password reset.

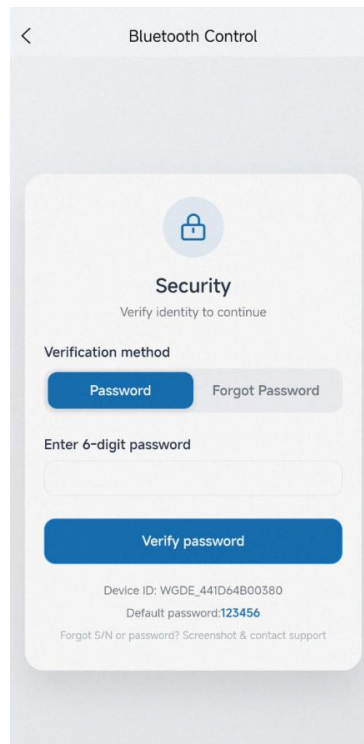

- Bluetooth connection successful → Go directly to the Bluetooth control page → Insert the charging connector into your vehicle → Tap "Charge Now" to start charging. The device will automatically stop once the vehicle is fully charged. You can also tap "Stop Charging" at any time to stop charging.

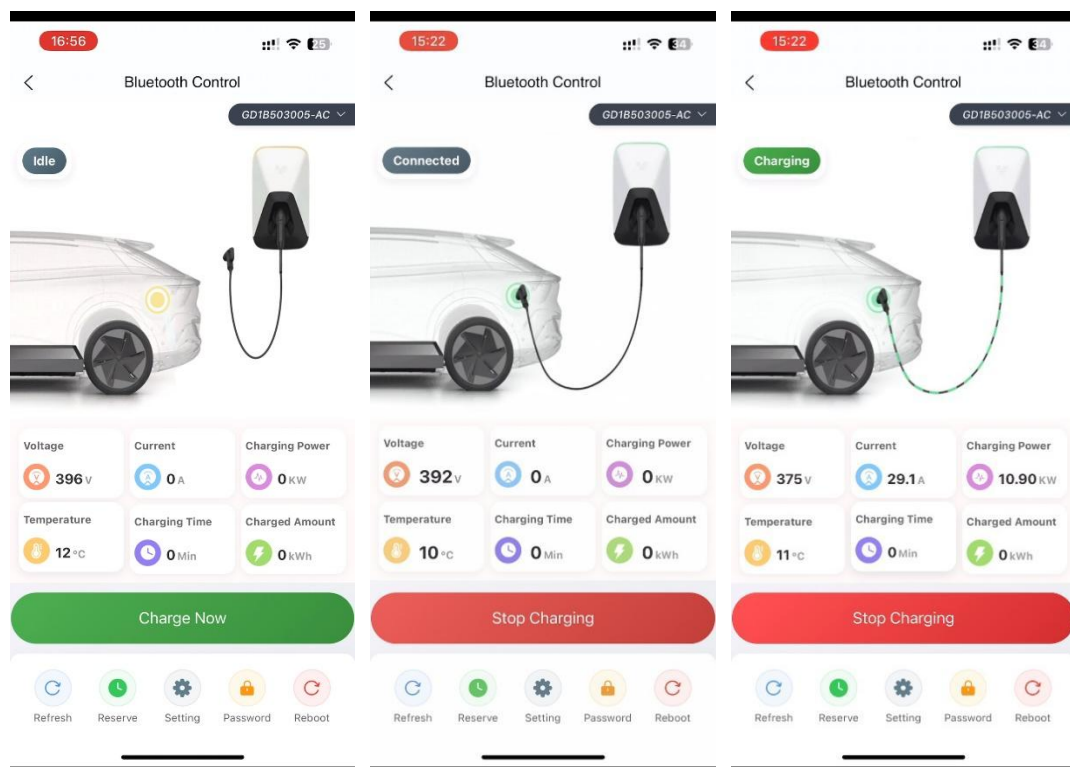


State: Idle → Connected → Charging

- If Bluetooth connection fails, ensure:
 1. Turn on Bluetooth on your phone. (Important: Do NOT pair any device with a name starting with "WGD" via your phone's Bluetooth settings, otherwise the app will not be able to connect.)
 2. Connect to Bluetooth near the charging station.
 3. In the phone settings, allow nearby devices and location permissions for this application in "Apps & notifications", "Application manager", or "Privacy and security". (If you already allowed all permissions during installation, this step can be skipped.)
 4. Verify the Bluetooth password (default: 123456 or your modified password). Set a new 6-digit password **without the number "0"** for security.
 5. Turn the charger off and on, and restart the app if needed.
- Charging data via Bluetooth will not be saved. It is recommended to use a WiFi connection whenever possible.

4. WIFI connection.

1) SCAN


- Tap "SCAN " → Scan the QR code on the right side of the device. The application will prompt success or failure.

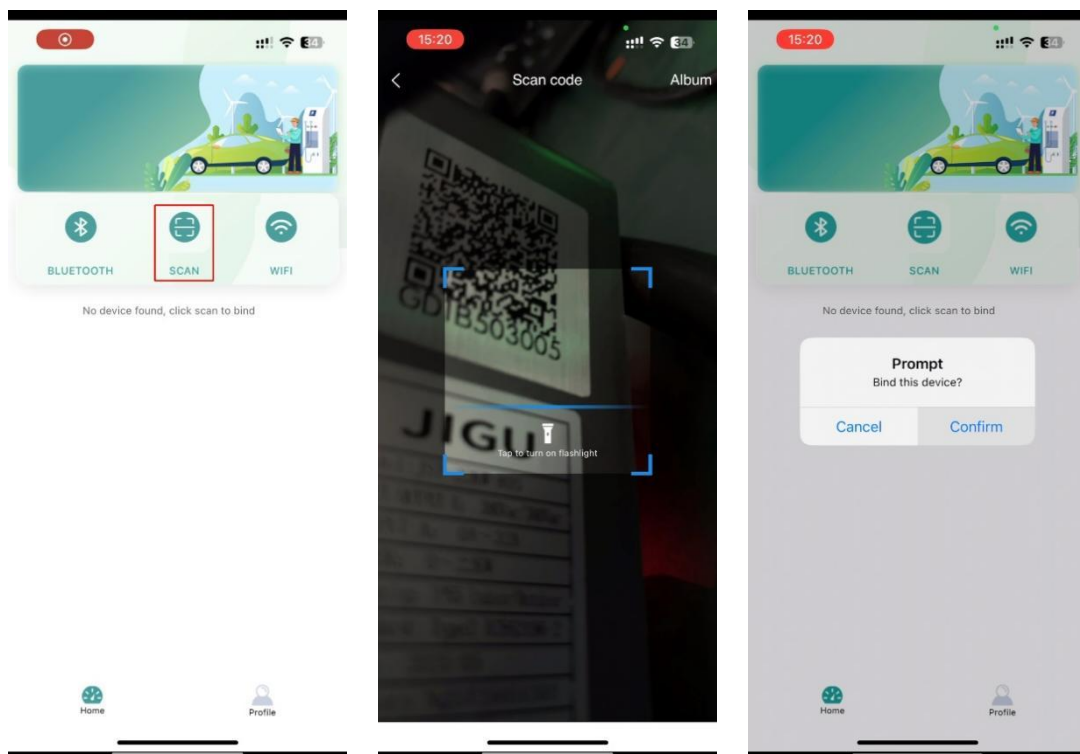


2) WIFI

- Turn on the power of the device → Tap "WiFi" → select a device whose name starts with "WGD....." from the list → Enter operation password "123456". (This step may not exist) →

Select a **2.4GHz WiFi** network. If the automatic search fails, manually enter the WiFi name and password, then tap "Confirm". The app will notify you of success or failure.

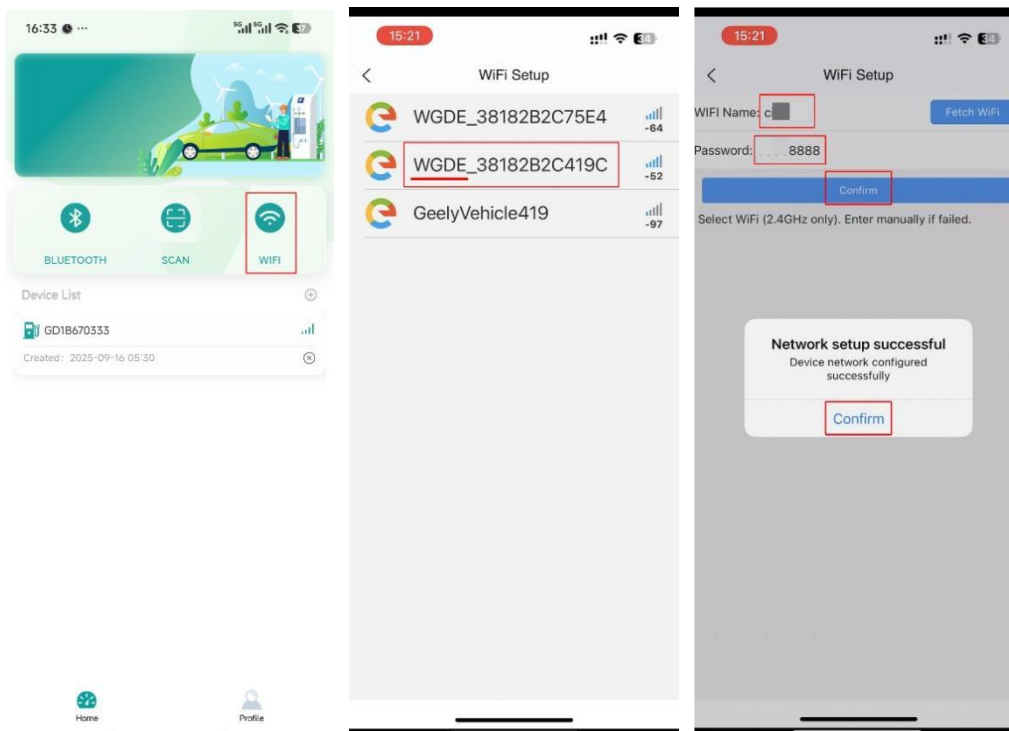

After a successful WiFi connection, tap "Device List" to view your device, then tap the device to enter the control page. Insert the charging connector into your vehicle and tap "Charge Now" to start. The device will stop automatically when fully charged. You can also tap "Stop Charging" at any time.

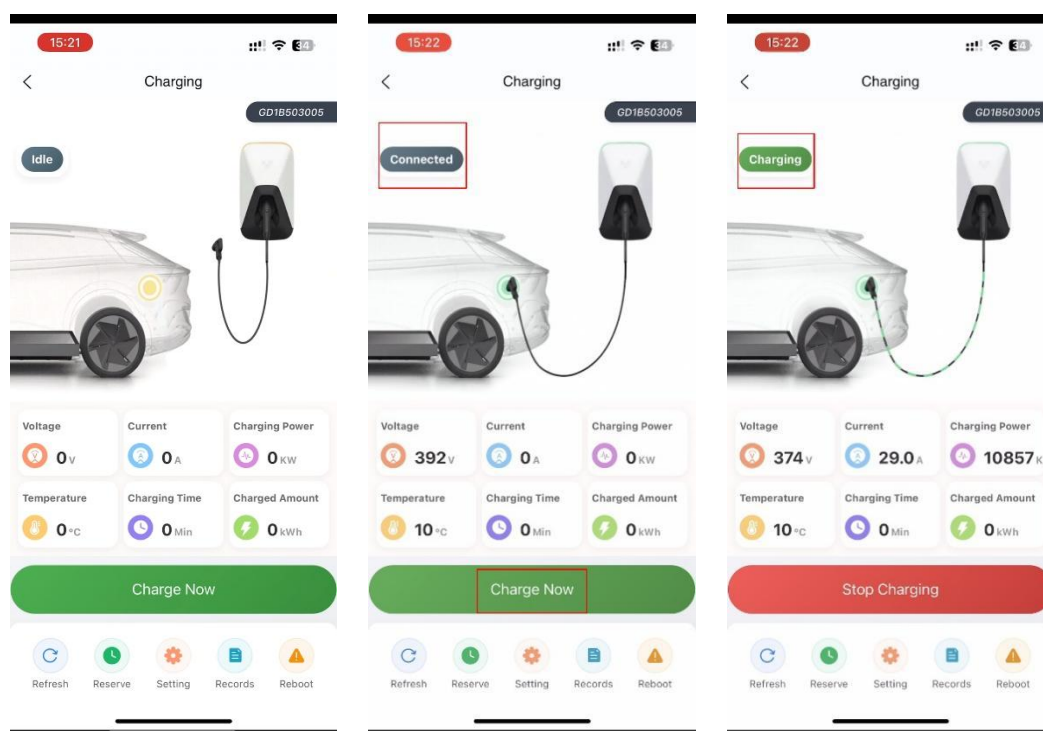

State: Idle → Connected → Charging


➤ If WiFi connection fails, ensure:

1. You are connected to a 2.4GHz network (5GHz is not supported).


2. Make sure the charger is within WiFi range and has a strong signal.
3. Avoid using special characters (e.g., spaces, "-") in your WiFi SSID and password. Note: Some routers may have password length limitations.
4. The first time you connect via WiFi, Bluetooth must be enabled on your phone. (Important: Do NOT pair any "WGD" device via your phone's Bluetooth settings, otherwise the app connection will fail.).
5. In the phone settings, allow nearby devices and location permissions for this app (see step 3 on Page 4).
6. Turn the charger off and on, and restart the app if needed.

5. Other functions.

Device list:

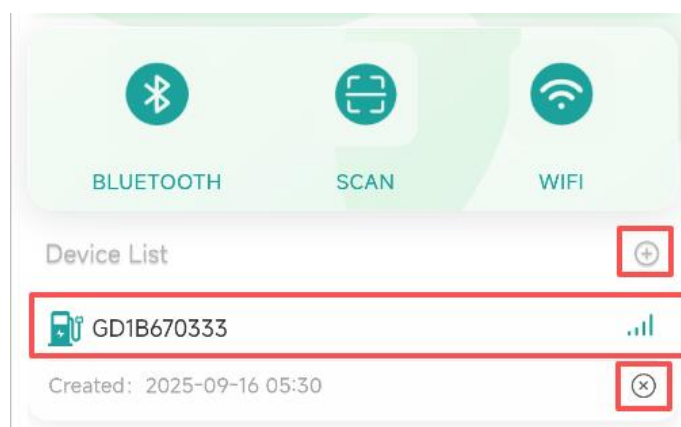


1. Tap "+" and enter a device ID starting with the letters GD to bind other devices.
2. Tap on "Device ID starting with GD" to enter the device control page.
3. Tap "-" to unbind the device.

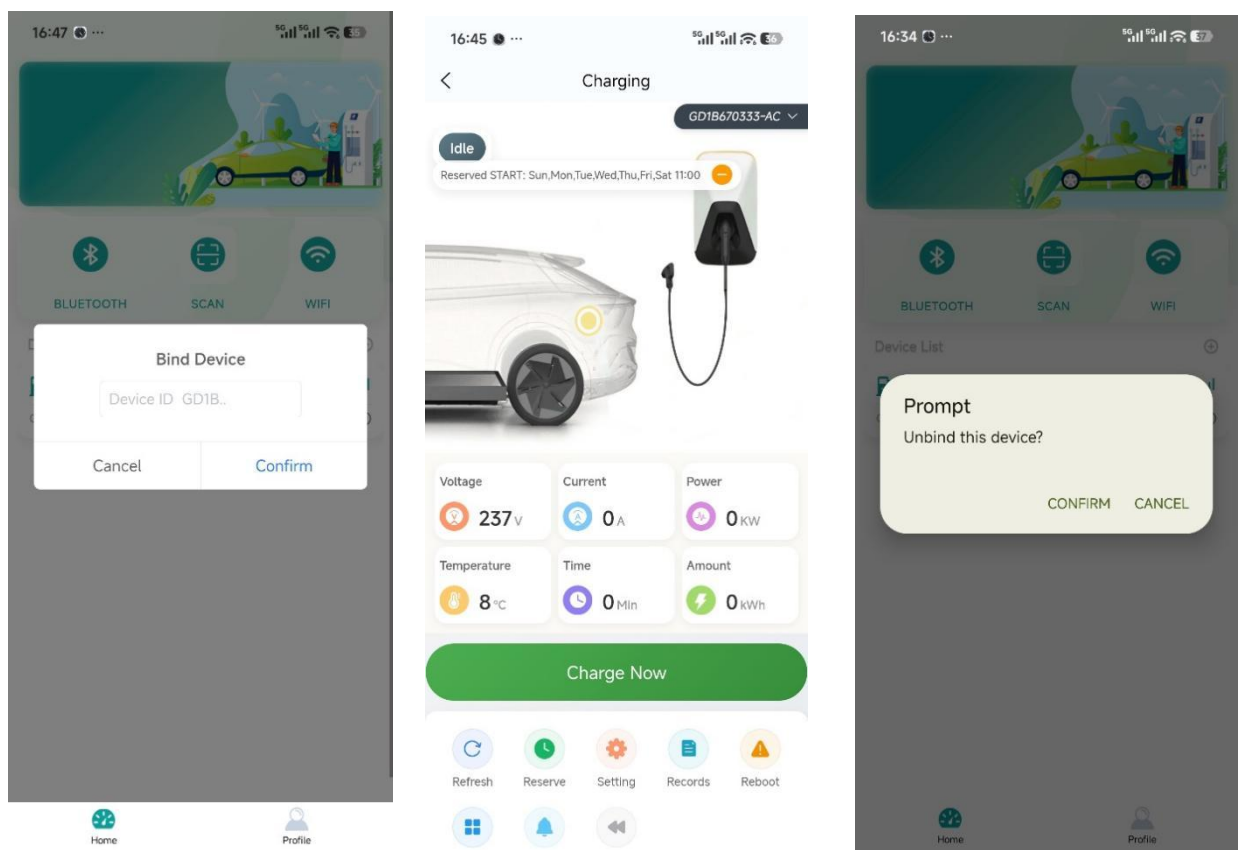

Device control page:

On the device control page, you can view real-time data of the device, including Voltage (V), Current (A), Charging power (kW), Temperature (°C), Charging time (Min), Charged Amount (kWh) and other information. Tap “**Charge Now**” to start charging. Tap “**Stop Charging**” to stop charging.

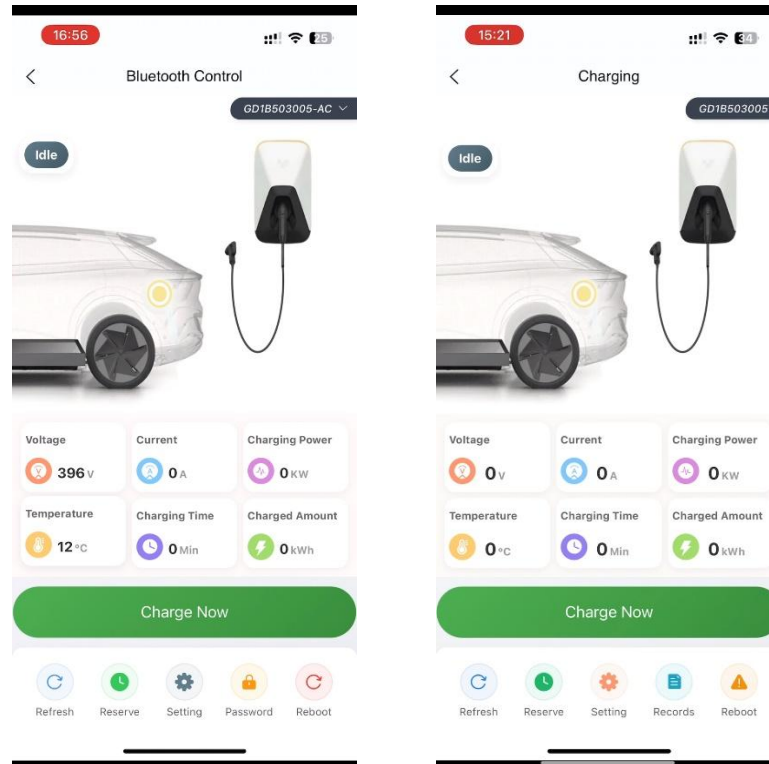

Refresh

Refresh:

Tap “Refresh” to get the latest status of the device.



Reserve

Reserve:

Please tap "Reserve" after the device port is in the 'Connected' state.

Via WiFi (remote):

You can choose "single" and "custom" to schedule charging time.


➤ **Single** (One-time schedule for a specific date and time):

Tap “Single” → Tap "Select Time" to set the single charging start time (e.g., 2026-03-16 23:38) → Tap “FOR START” → Tap "Confirm" to save the start time → The system will prompt 'Reservation successful' to complete the single start time setup.

➤ **Note:** Usually, setting only the start time is sufficient - once the vehicle is fully charged, the charger

will automatically stop charging, so there is no need to set an additional end time.


To set an end time (optional): Select “Single”, switch to “FOR STOP”, tap “Select Time” to set the end time(e.g., 2026-03-17 02:55), and tap “Confirm”. The system will prompt 'Reservation successful' to complete the end time setup.

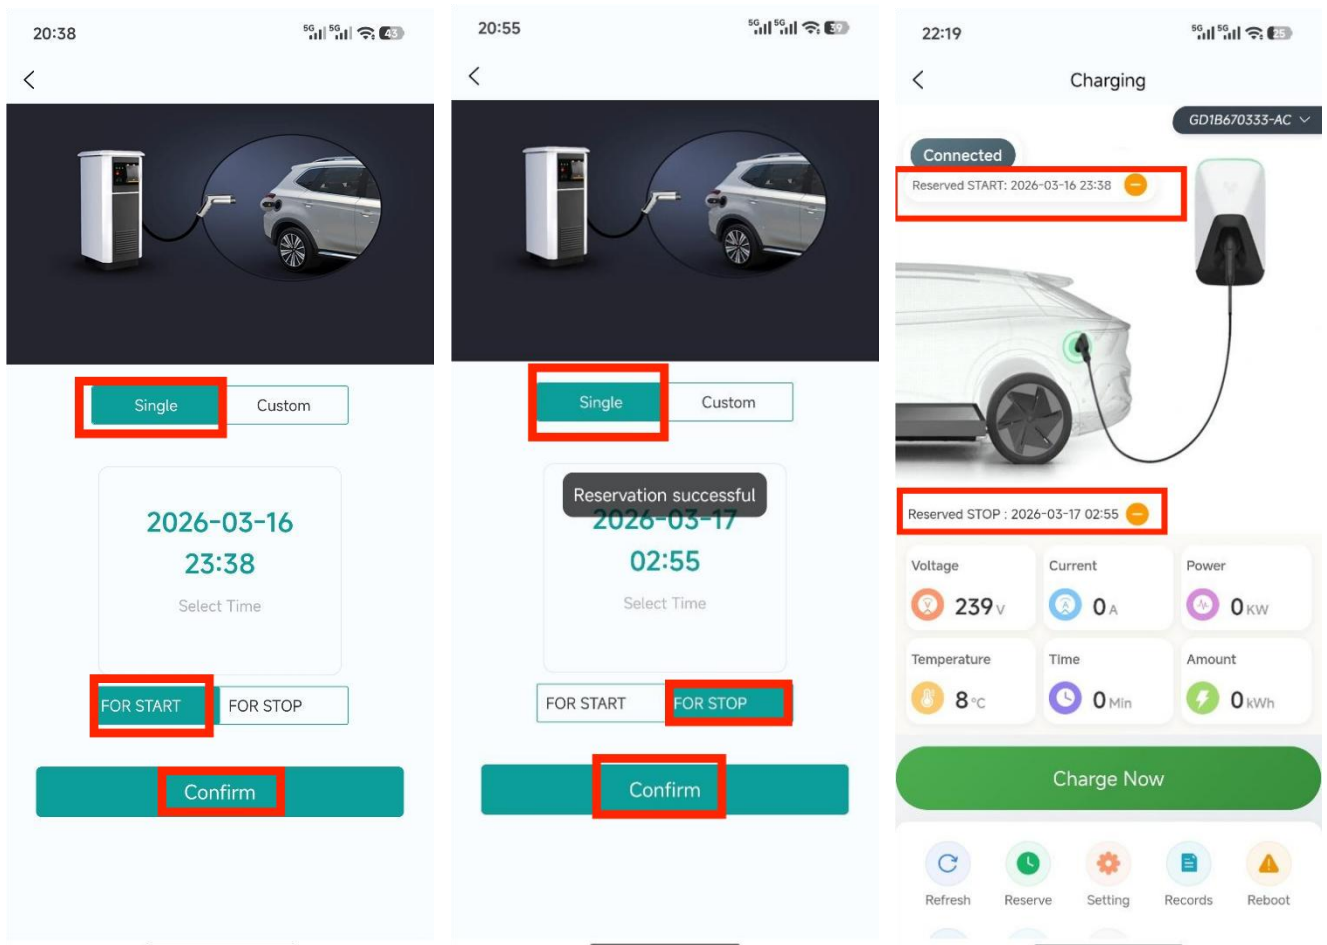

➤ **Custom** (Cyclic Schedule for the Week):


Tap “Custom” → Tap "Select Repeat Date/Time " and choose the days of the week for recurring charging (e.g., Sun, Mon, Tue, Wed, Thu, Fri, Sat 23:05) → Tap “FOR START” → Tap "Confirm" to save the start time → The system will prompt 'reservation successful' to complete the custom start time setup.

To set an end time (optional): Select “Custom”, switch to “FOR STOP”, tap “Select Repeat Date/Time” to set the end time(e.g., Sun, Mon, Tue, Wed, Thu, Fri, Sat 02:05), and tap “Confirm”. The system will prompt 'reservation successful' to complete the custom end time setup.

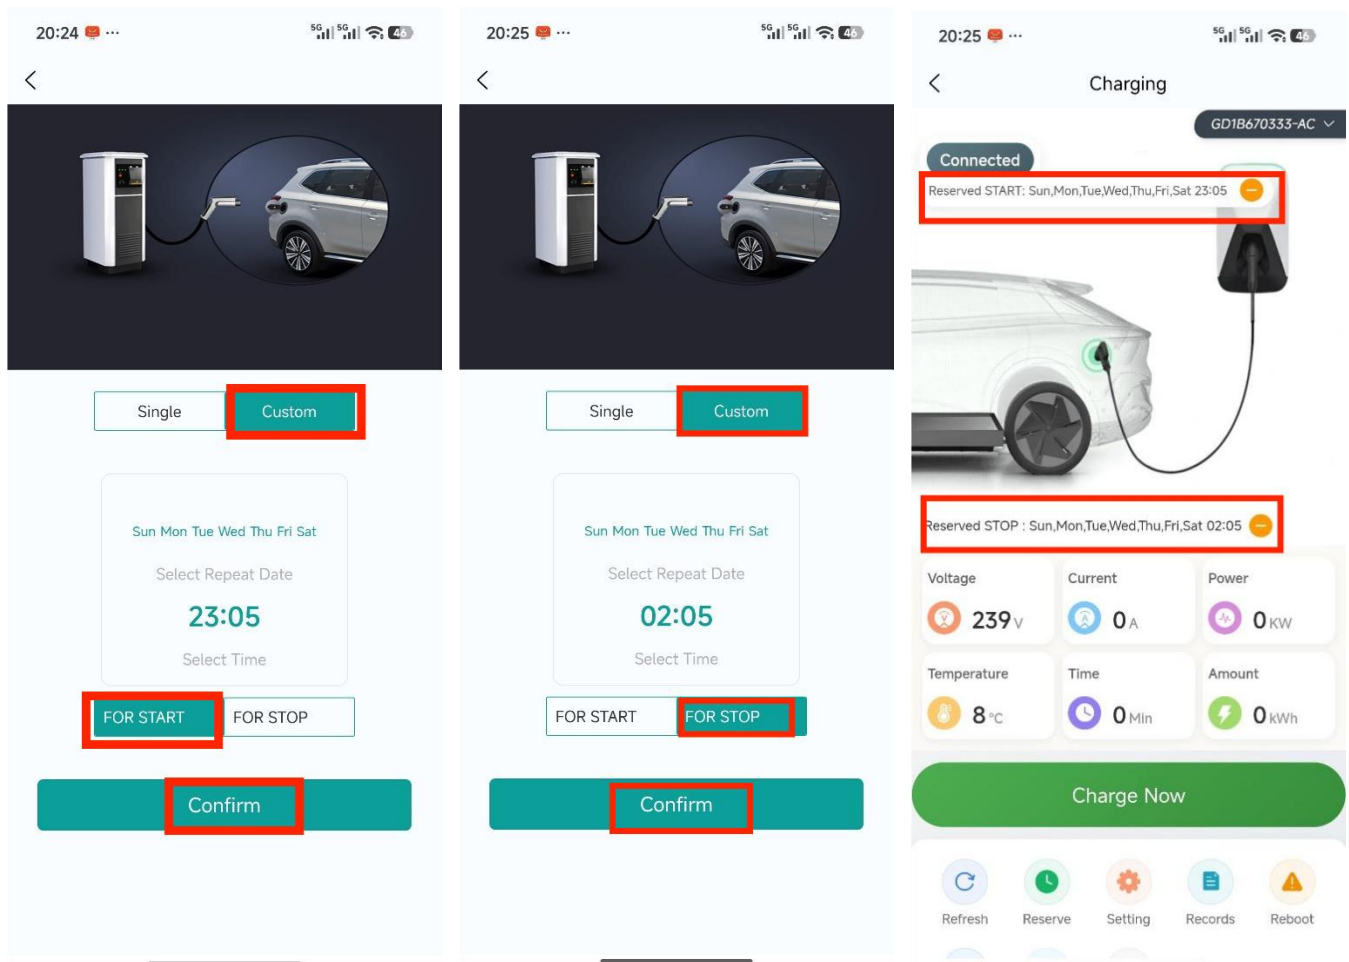

➤ **To cancel a schedule:**
Tap the "Cancel" button (⊖) and confirm.

Via Bluetooth (on site):
One-time schedule
Charging can only be scheduled for the next 24 hours.

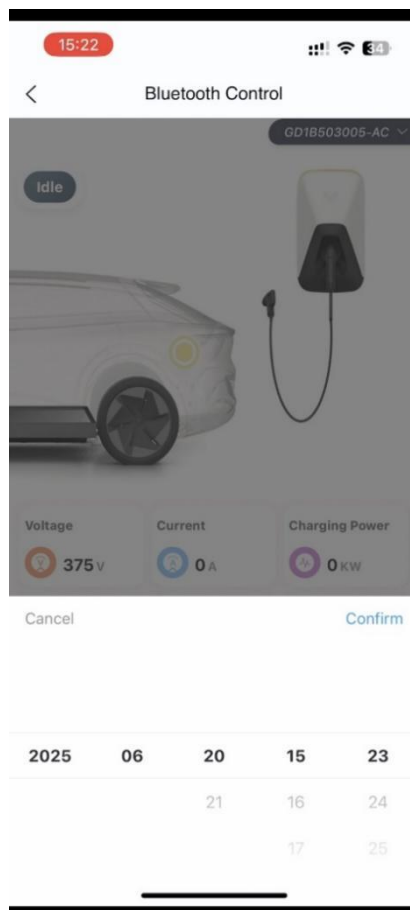

Regarding scheduling a charging time, please ensure the following:

1. The charging station does not lose power. If there is a power outage, you will need to reschedule.
2. Turn off the "Plug and Charge" option in "Settings".
3. The charging station must be successfully connected via WiFi with a stable signal.
4. After the charging port shows "Connected", tap "Reserve" to schedule.



Setting

Settings

On the device control page, tap the Settings icon to access the following configuration options.

Charging Mode

Select one of the following three charging modes (mutually exclusive):

- **Standard Mode (App Remote Start)**
In this mode, after inserting the charging connector, you need to manually tap "Charge" in the WeGoodCharger App to start charging. The charger will not start charging automatically.
- **Free Card (RFID Card Swipe to Charge)**
This mode allows you to start charging by tapping an authorized RFID card on the card reader area of the charging station, without using the App. (Requires a charger version that is equipped with RFID functionality.)
- **Plug and Charge**
When this mode is selected, simply plug the charging connector into the vehicle and charging will

start automatically — no App operation or card swiping required.

- ✧ **Note:** Only one charging mode can be active at a time. Selecting a new mode will automatically cancel the previously selected mode.

Other Settings

➤ **Bluetooth Auto Charge**

When this option is enabled, and the charging port is in the "Connected" state, charging will start automatically as soon as your phone connects to the charger via Bluetooth.

(This option is only available for Bluetooth connections and is independent of the above charging modes.)

➤ **Charging Current**

Before inserting the charging connector (with the device in Idle state), you can use the – and + buttons to set the maximum charging current. The current value adjusts in steps, ranging from 8A to 32A (e.g., 8A, 10A, 12A, 14A, 16A, 18A, 20A ... 32A). The current setting takes effect immediately after adjustment.

Additional Buttons

➤ **Get Mainboard Configuration**

Tap this button to retrieve the current configuration parameters from the charger's mainboard and refresh the displayed settings.

➤ **Confirm**


Tap this button to save all current settings and apply them to the charger.

➤ **Restore Default Configuration? (gray text)**

Tap this gray text button to reset all settings to factory default configuration. Use this option if you want to clear all custom settings and restore original defaults.

Warning:


- Do not exceed the maximum charging current supported by the input cable and input socket.
- If charging is interrupted:
 1. Confirm that the vehicle charging interface is in good contact.
 2. Check if overload protection has been triggered.
 3. If overload protection has been triggered, try reducing the charging current.

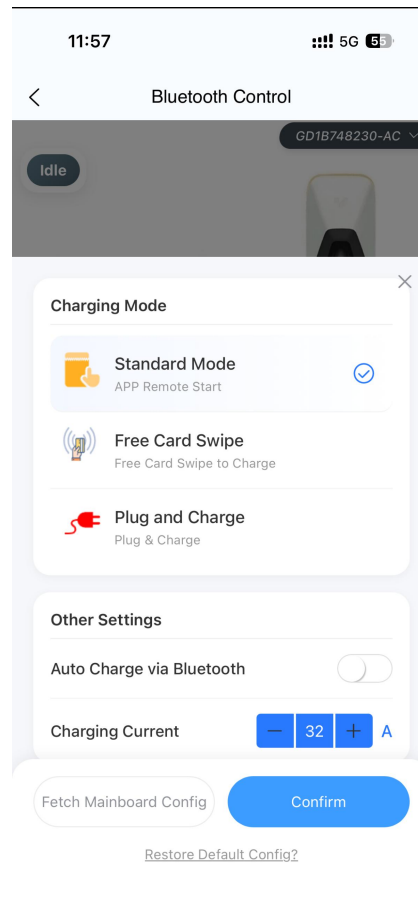

Records

Records:

Only record the charging history connected through WIFI. (Device ID, xx.xkWh, Charging time, End time)

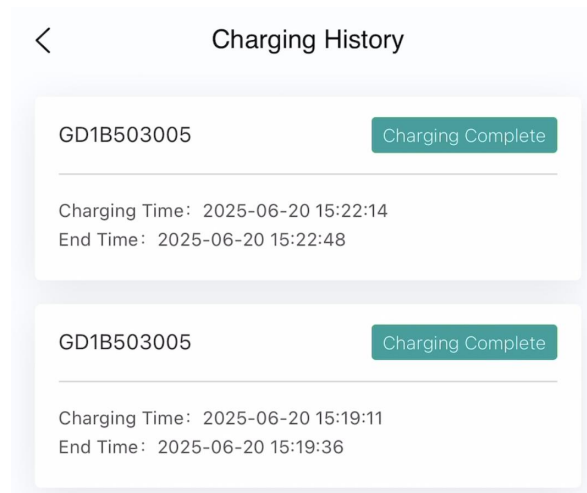

Reboot

Reboot:

Remotely resets the device status to wake up the vehicle and refresh the charging port connection. This


helps resolve abnormal conditions and allows you to restart charging without unplugging the connector.




Platform

Platform:


This device supports the OCPP 1.6 protocol and can seamlessly connect to mainstream charging operation management platforms that comply with this standard. Please contact the seller for technical support.

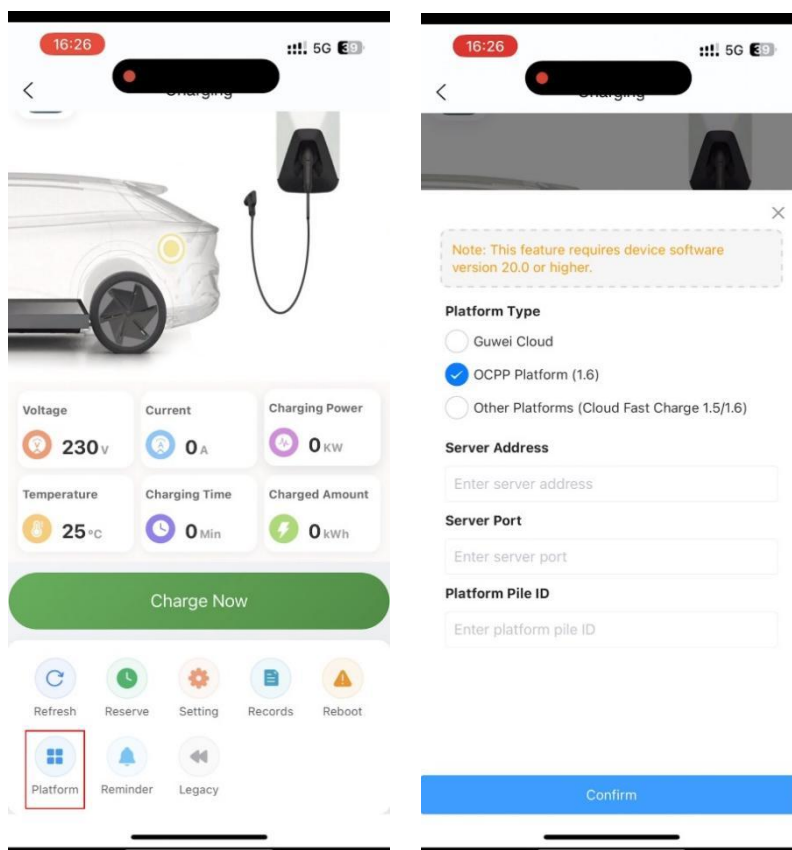


6. Profile.

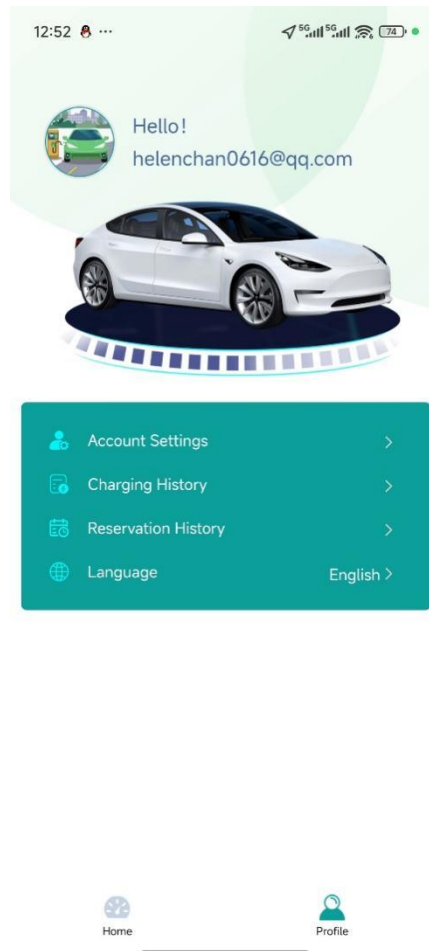

- **Account Settings:**
Change the password for your registered email account. (This is not the Bluetooth password.)
- **Charging History:**
Records only the charging history (time, energy used, device ID) for WiFi connections.

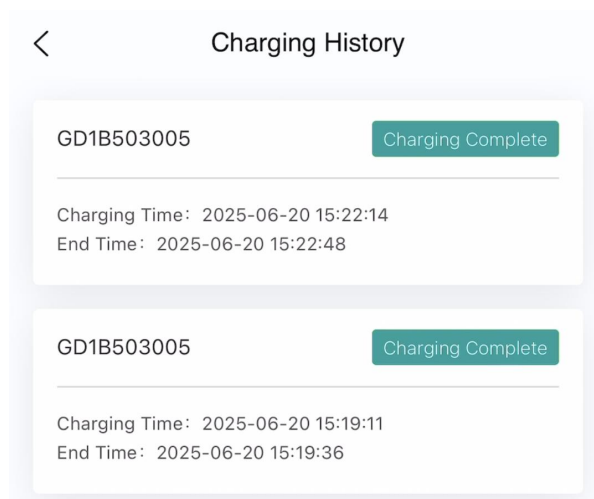

- **Reservation History:**
Records only the reservation history (single/recurring) for WiFi connections.

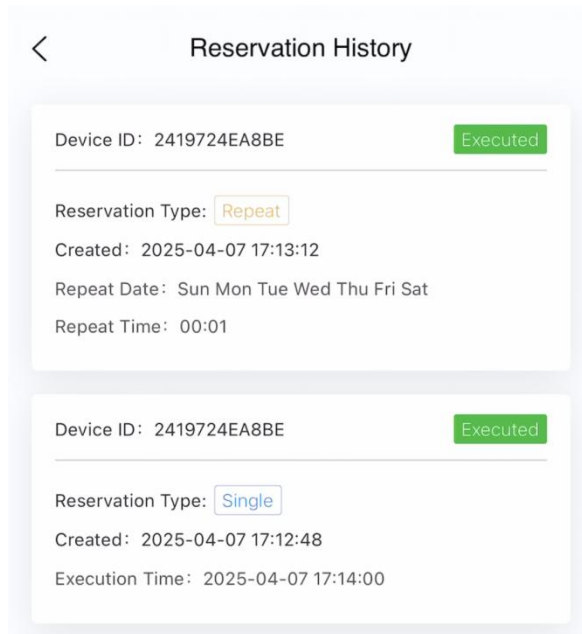


➤ **Language:**

Options include Chinese, English, French, Spanish, Russian, Hebrew, Portuguese, Thai, Japanese, Italian, German, Danish, Arabic, Farsi.

7. Version updates.

To check for updates, go to Profile → Version updates.

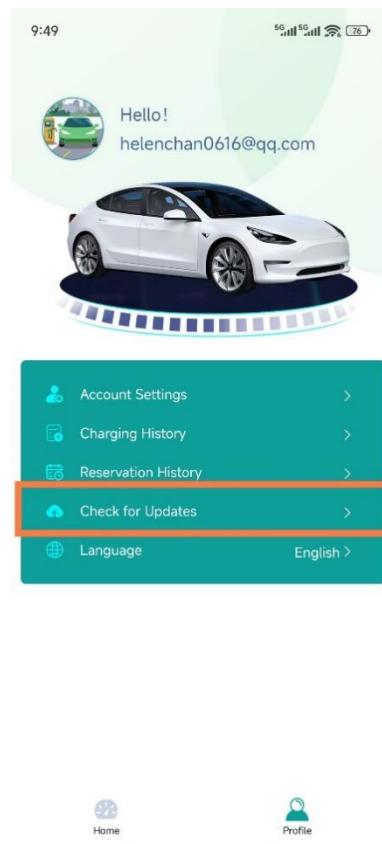

8. Frequently Asked Questions.

1) How to charge on a new phone?

- If you remember your email and password, simply log in on the new phone.
- If you forget your account or password, log in on your old phone and unbind the device (Device List → tap "⊗" → Confirm unbind). Then download the app on your new phone, register a new account, and connect via Bluetooth or WiFi.
- If your old phone is lost, provide us with the device code and we will unbind it for you.

2) Why do I get a "wrong password" error when setting a new Bluetooth password?

- If your new password contains the number "0", the system will always show an error. Tap "Forgot Password" and enter the reset password provided by the seller. The Bluetooth password will then revert to the default "123456".

3) If there is a power outage, will the charger continue to charge after power is restored?

- No, it will not resume automatically. However, you can remotely restart charging via the app by tapping "Reboot" and then "Charge Now".