

SYDE 544: Biomedical Measurement and Signal Processing

Assignment 3: EEG


Instructor: Steven Pretty

Due Date: Wednesday, Feb 27th, 2023 (11:59 PM, EST)

Instructions: In addition to this document, you will also find four (4) additional files in this assignment package: 1) the main Matlab script named SYDE544_Ass3.m; 2) a skeleton Matlab function named: mySMRCalculation.m; 3) a skeleton Matlab function named: mySMRCalculationCSP.m; and 4) a Matlab data file named: rawEEG.mat, which contains the EEG data to be processed (see description below).

You should submit: 1) Matlab script file, named SYDE544_Ass3.m; 2) two Matlab function files, called mySMRCalculation.m and mySMRCalculationCSP.m; 3) a separate PDF document, named SYDE544_Ass3_graphs.pdf, should also be submitted, with all the graphs generated by the script, adequately annotated (i.e., add appropriate axis labels). In this PDF file, comments on your observation for each graph should also be provided in the corresponding caption.


Background Information

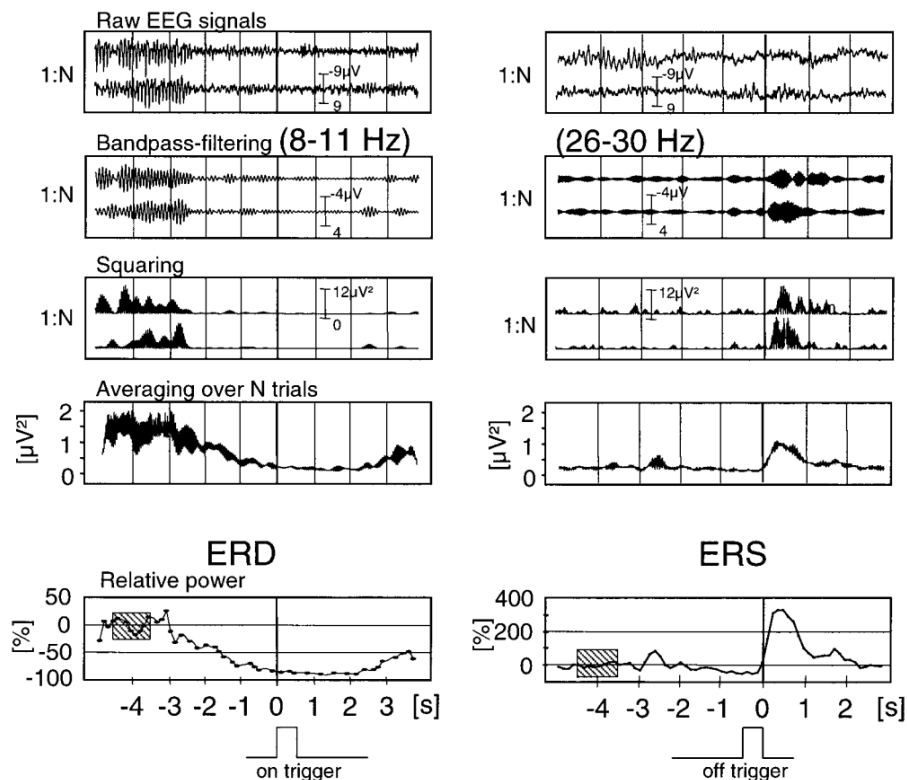

As we discussed in the lectures, one of the widely used BCI modality is Event-related Desynchronization and Event-related Synchronization (ERD/ERS), or Sensor-motor Rhythm (SMR). The SMR processing is nicely illustrated in the figure above [1].

In the above figure, time zero ($t=0$) is the time when a motor or sensory task is performed. For this exercise, the data file attached contains two types of sensory attention tasks: the subject was focusing her attention to stimulus coming from either left or right hand, while both hands were being stimulated by a tactile stimulator at $t=0$. For each of the two tasks, 60 repetitions (trials) were performed, with random intervals between consecutive trials. Here, for simplicity, we look at the general SMR frequency band, *i.e.* [8, 26] Hz, rather than specific sub-bands (line 16 of the main script).

The data file contains 62 EEG channels (62 rows). The channel map is shown below (10-20 channel names on the left, and channel number on the right):

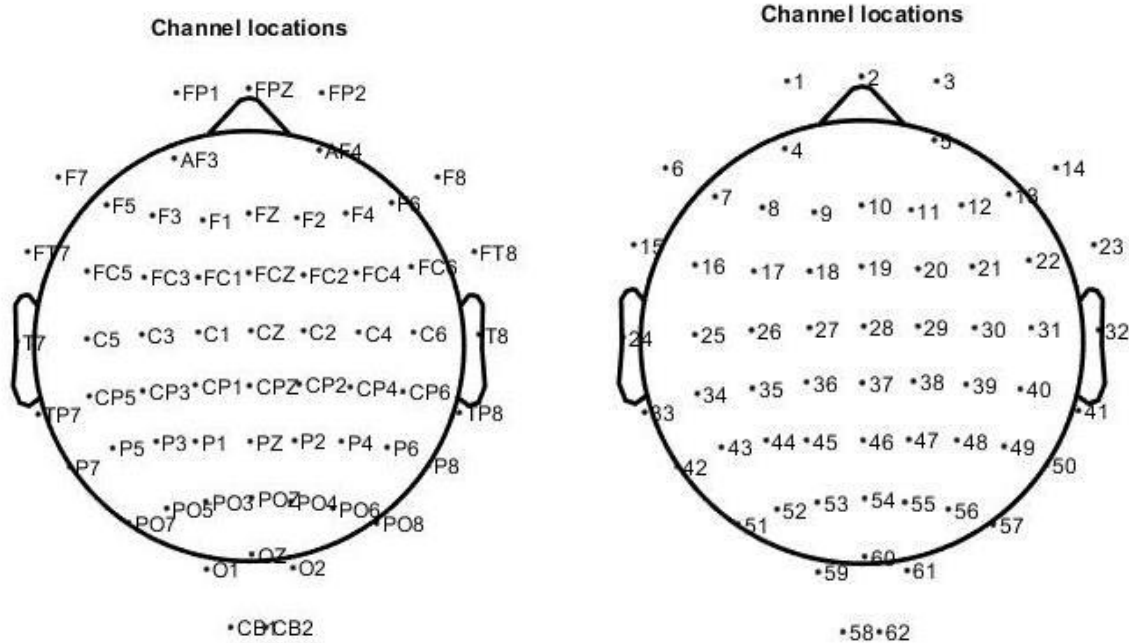

According to the figures, channel C3 is the 26th row of the data matrix (line 32) and channel C4 is the 30th row of the data matrix (line 33). The 63rd row of the matrix indicates when a task was performed, and which task was performed. Such as, the starting time ($t=0$) for each trial was obtained between line 24 and line 26 of the main script. Other relevant parameters of the processing are clearly commented in the main script before line 26.

Problems

Note: Your observations should include a description and explanation of observed phenomena. Where appropriate speak to the assumptions and benefits of filtering techniques in the context of EEG-driven BCI.

Problem 1 (5 pts)

Complete the Matlab function: *mySMRCalculation.m* (3 pts), following the steps illustrated in the first figure. DO NOT change the given input/output syntax of the function. Run the code to line 65, observe the generated graph and comment your observation (2 pts).

Problem 2 (5 pts)

Finish the script up to line 78, so you can perform small (nearest neighbor) Laplacian filtered version of C3 and C4 (1 pts) ($c = 9$; see below), calculate the corresponding SMR values (1 pts), and generate the graph similarly to the provided code in Problem 1, by completing the code between line 81-103 (1 pts). Observe and comment on the generated graph, in relation to the observation you had for Problem 1 (2 pts).

-1	-1	-1
-1	8	-1
-1	-1	-1

Problem 3 (10 pts)

Complete the Matlab function: *mySMRCalculationCSP.m* (7 pts), so you can perform common spatial pattern filtering, as we discussed in lecture [2]. Generate the graph similarly to the provided code in Problem 1 and 2, by completing the code between line 113-139 (1 pts). Observe and comment on the generated graph, in relation to the observation you had for Problem 1 and 2 (2 pts).

References

- [1] G. Pfurtscheller and F. H. Lopes Da Silva, "Event-related EEG/MEG synchronization and desynchronization: basic principles," *Clin. Neurophysiol.*, vol. 110, pp. 1842–1857, 1999.
- [2] B. Blankertz, R. Tomioka, S. Lemm, M. Kawanabe, and K. Muller, "Optimizing Spatial filters for Robust EEG Single-Trial Analysis," *IEEE Signal Process. Mag.*, vol. 25, no. 1, pp. 41–56, 2008.