OUTPUTS:

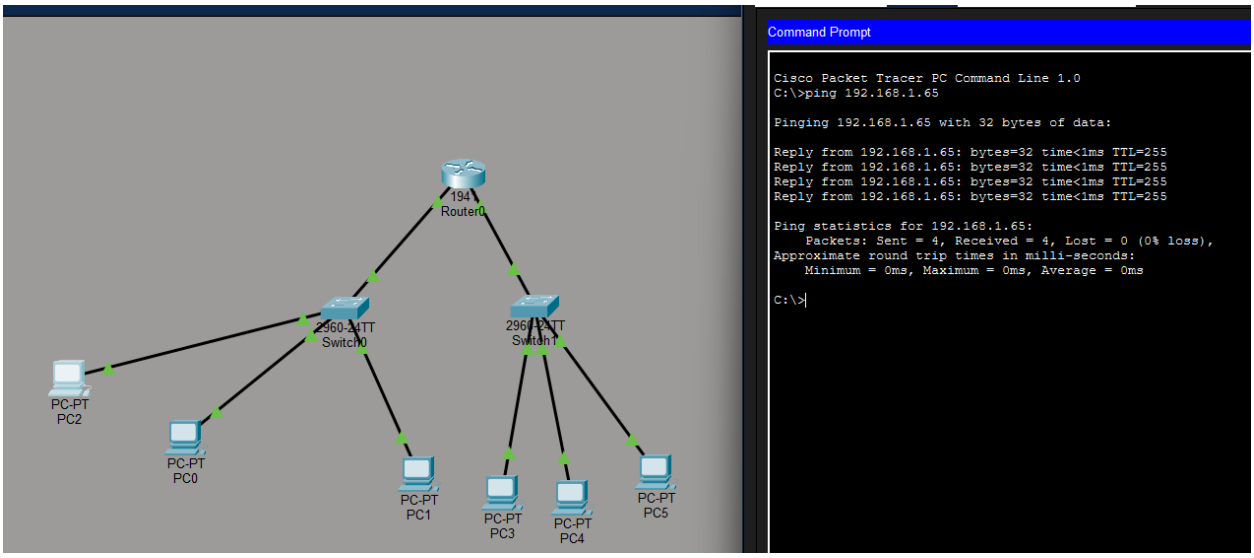
194
Router0
2960-24TT
Switch0
2960-24TT
Switch1
PC-PT
PC2
PC-PT
PC0
PC-PT
PC1
PC-PT
PC3
PC-PT
PC4
PC-PT
PC5
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.65
Pinging 192.168.1.65 with 32 bytes of data:
Reply from 192.168.1.65: bytes=32 time<1ms TTL=255
Reply from 192.168.1.65: bytes=32 time<1ms TTL=255
Reply from 192.168.1.65: bytes=32 time<1ms TTL=255
Reply from 192.168.1.65: bytes=32 time<1ms TTL=255
Ping statistics for 192.168.1.65:
Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\>

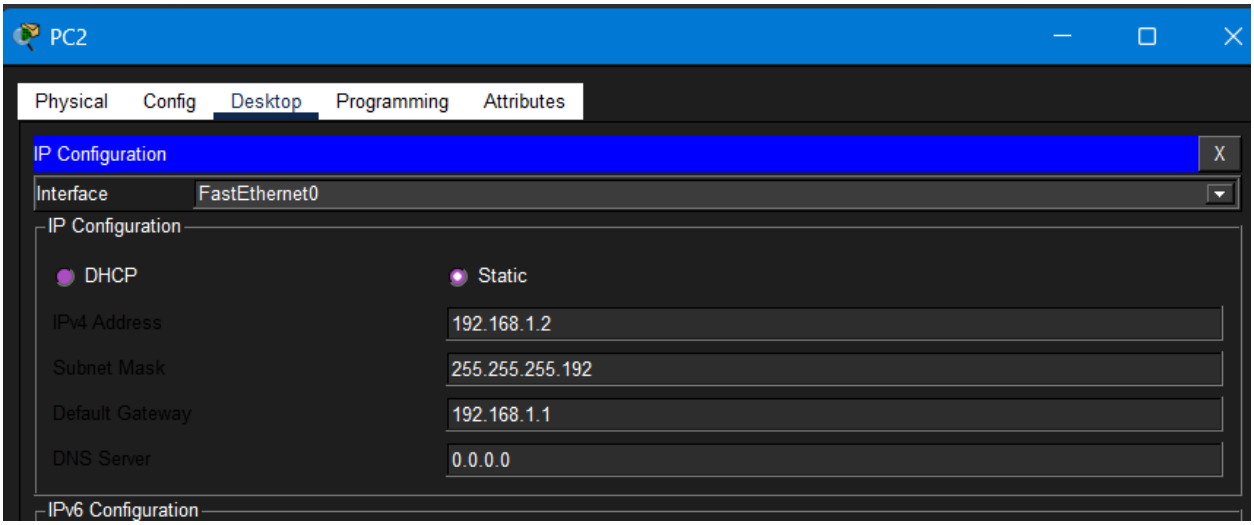
PC2
Physical
Config
Desktop
Programming
Attributes
IP Configuration
X
Interface
FastEthernet0
IP Configuration
DHCP
Static
IPv4 Address
192.168.1.2
Subnet Mask
255.255.255.192
Default Gateway
192.168.1.1
DNS Server
0.0.0.0
IPv6 Configuration

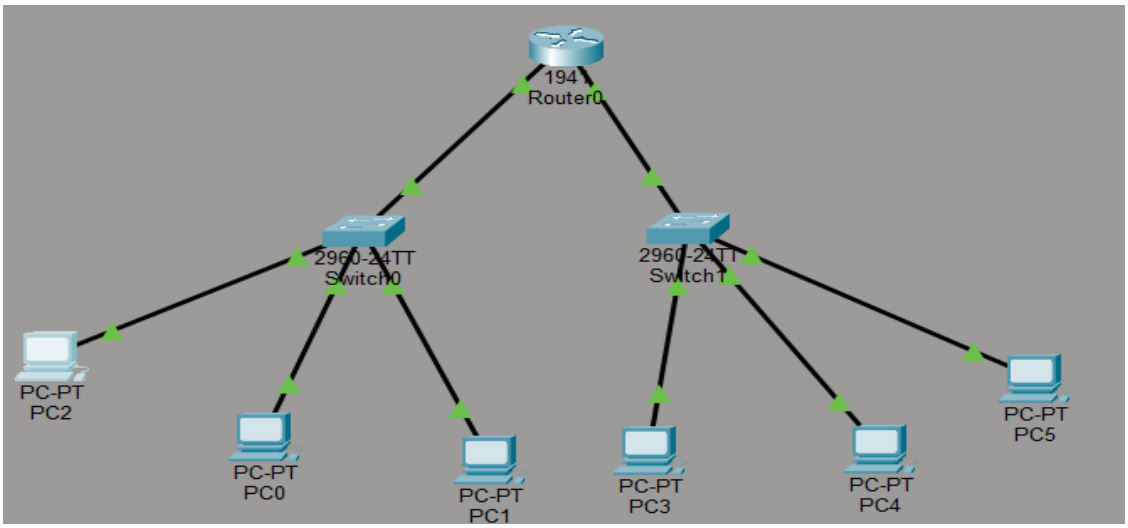
194
Router0
2960-24TT
Switch0
2960-24TT
Switch1
PC-PT
PC2
PC-PT
PC0
PC-PT
PC1
PC-PT
PC3
PC-PT
PC4
PC-PT
PC5

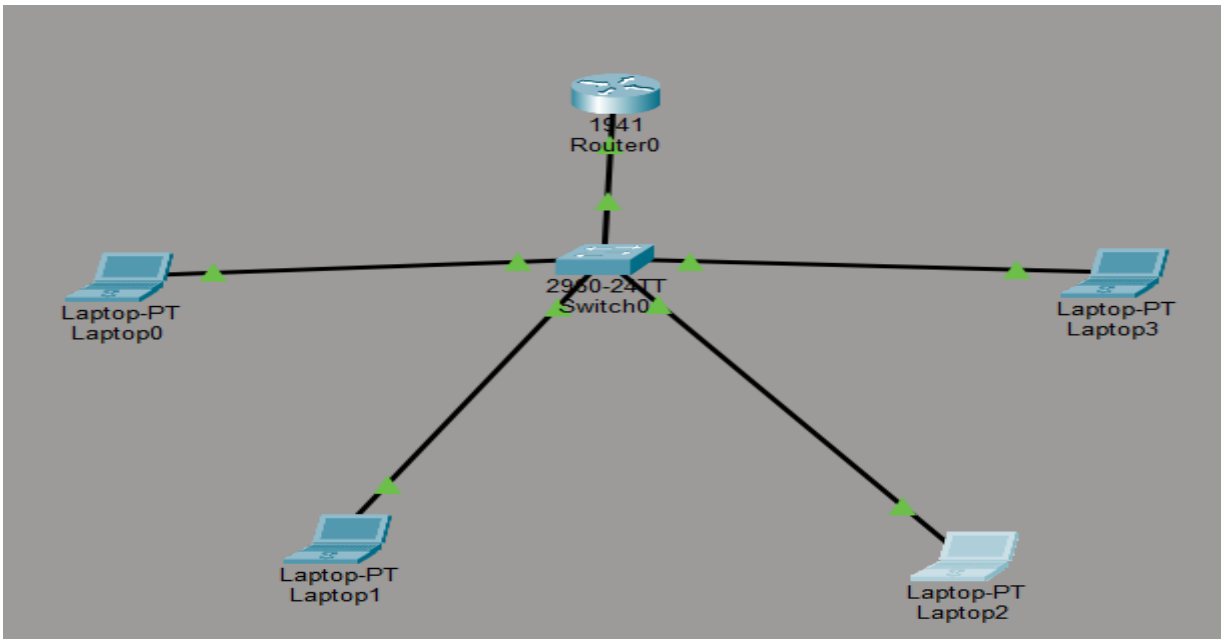
1941
Router0
2960-24TT
Switch0
Laptop-PT
Laptop0
Laptop-PT
Laptop1
Laptop-PT
Laptop2
Laptop-PT
Laptop3

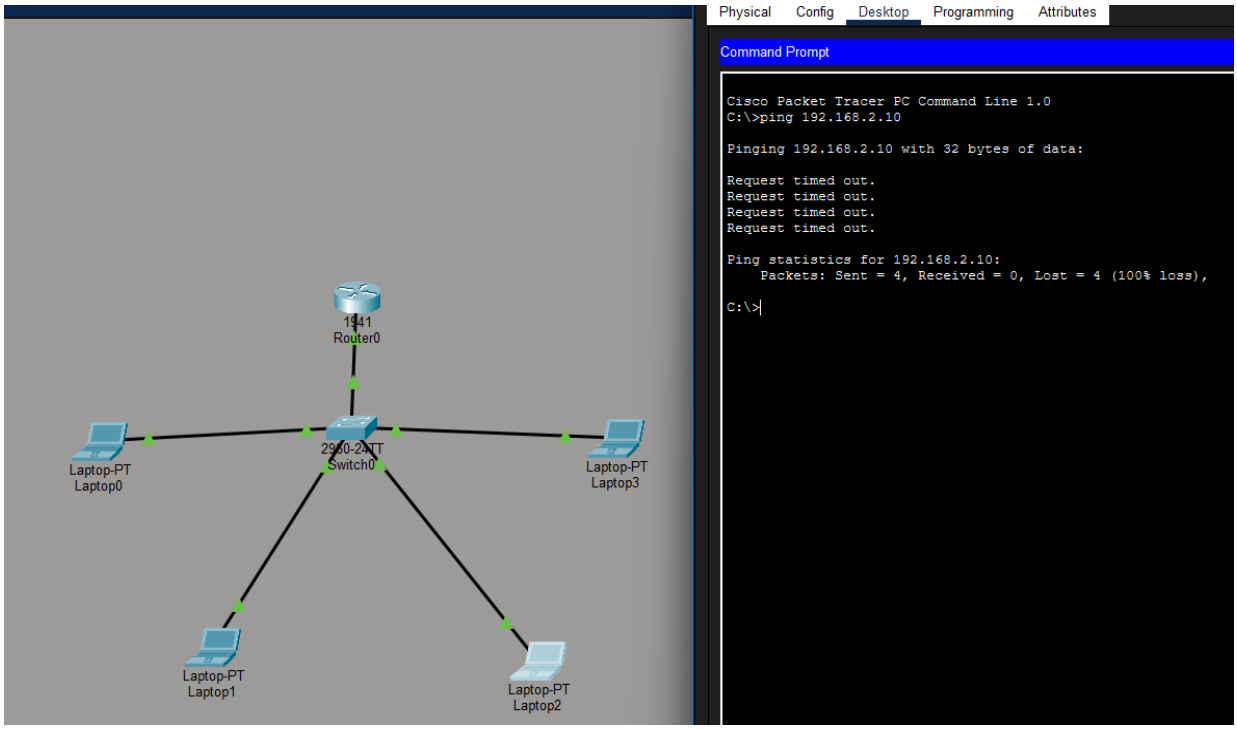
1941
Router0
2960-24TT
Switch0
Laptop-PT
Laptop0
Laptop-PT
Laptop1
Laptop-PT
Laptop2
Laptop-PT
Laptop3
Physical
Config
Desktop
Programming
Attributes
Command Prompt
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 192.168.2.10
Pinging 192.168.2.10 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.
Ping statistics for 192.168.2.10:
Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),
C:\>