OUTPUT:

HUB

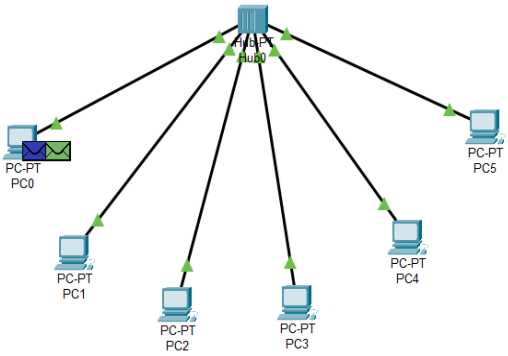

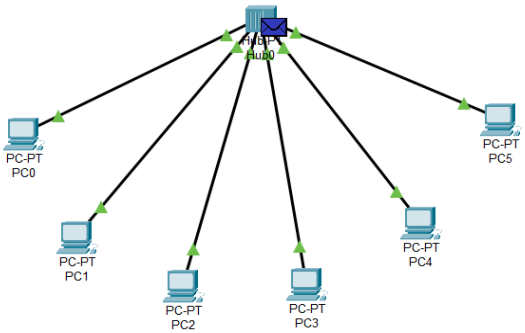

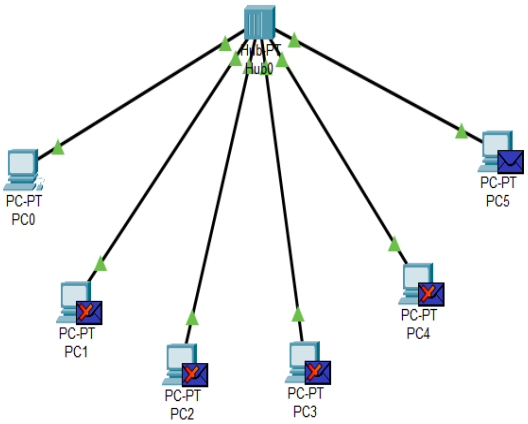

Vis.	Time(sec)	Last Device	At Device	Type
	0.000	--	PC0	ICMP
	0.001	PC0	Hub0	ICMP
	0.002	Hub0	PC1	ICMP
	0.002	Hub0	PC2	ICMP
	0.002	Hub0	PC3	ICMP
	0.002	Hub0	PC4	ICMP
	0.002	Hub0	PC5	ICMP

Switch

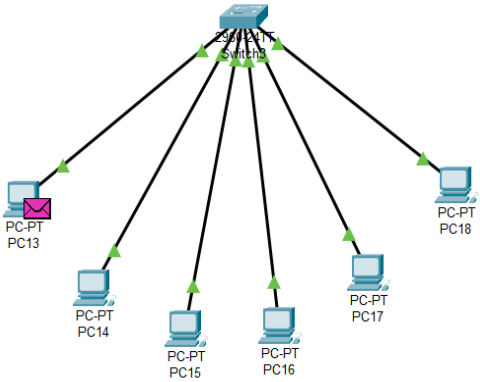

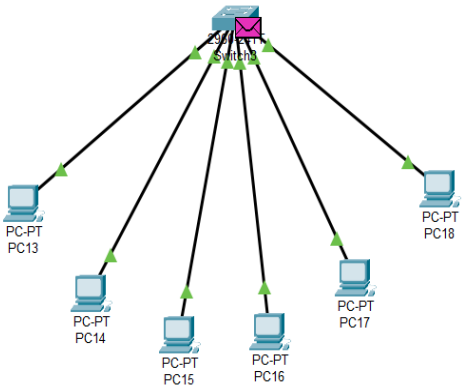

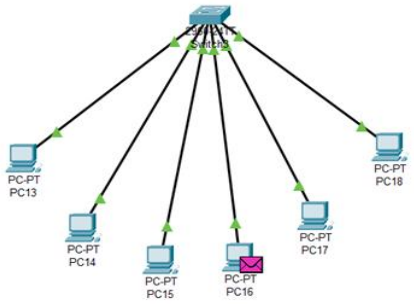

Vis.	Time(sec)	Last Device	At Device	Type
	0.000	--	PC13	ICMP
	0.001	PC13	Switch3	ICMP
	0.002	Switch3	PC16	ICMP

Bridge

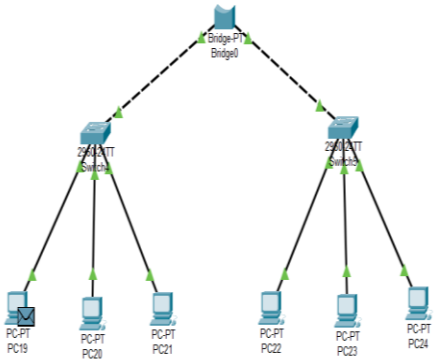

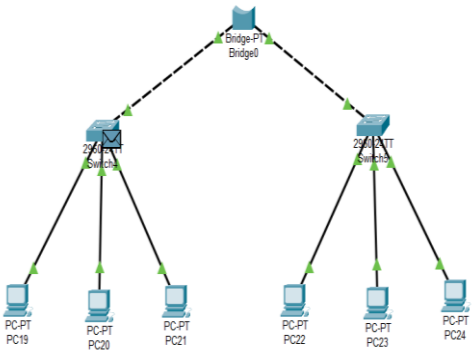

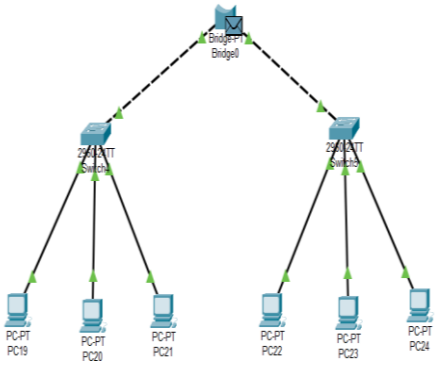

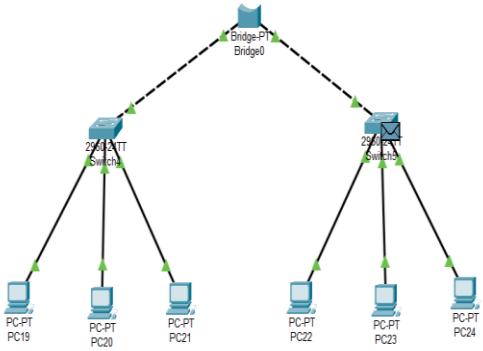

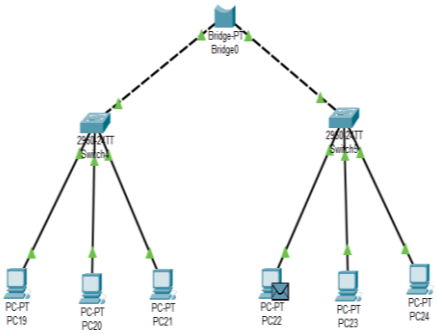

Vis.	Time(sec)	Last Device	At Device	Type
	0.000	--	PC19	ICMP
	0.001	PC19	Switch4	ICMP
	0.002	Switch4	Bridge0	ICMP
	0.003	Bridge0	Switch5	ICMP
	0.004	Switch5	PC22	ICMP
	0.005	PC22	Switch5	ICMP

Router

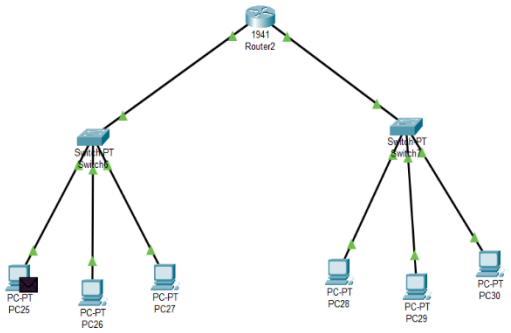

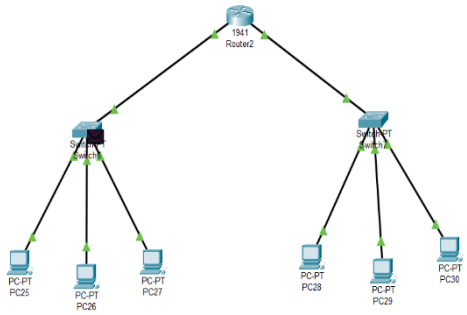

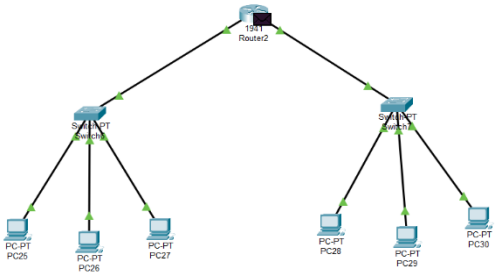

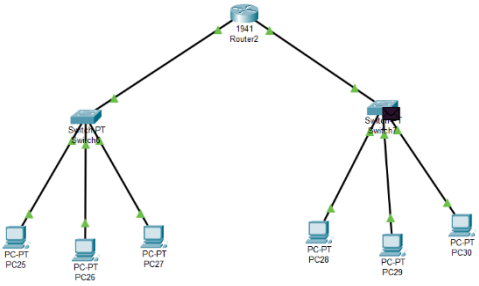

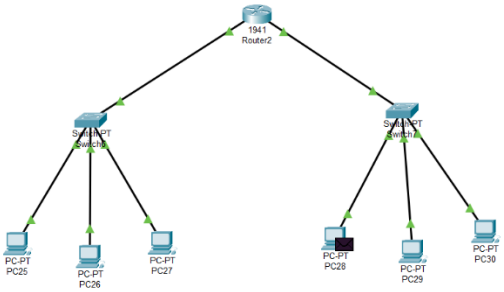

Vis.	Time(sec)	Last Device	At Device	Type
	0.000	--	PC25	ICMP
	0.001	PC25	Switch6	ICMP
	0.002	Switch6	Router2	ICMP
	0.003	Router2	Switch7	ICMP
	0.004	Switch7	PC28	ICMP

```
C:\>ping 10.10.10.2

Pinging 10.10.10.2 with 32 bytes of data:

Request timed out.
Reply from 10.10.10.2: bytes=32 time=8ms TTL=127
Reply from 10.10.10.2: bytes=32 time=8ms TTL=127
Reply from 10.10.10.2: bytes=32 time=8ms TTL=127

Ping statistics for 10.10.10.2:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 8ms, Maximum = 8ms, Average = 8ms
```

Repeater

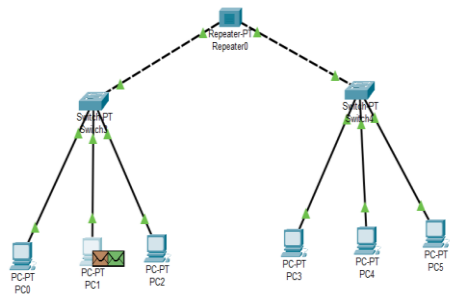

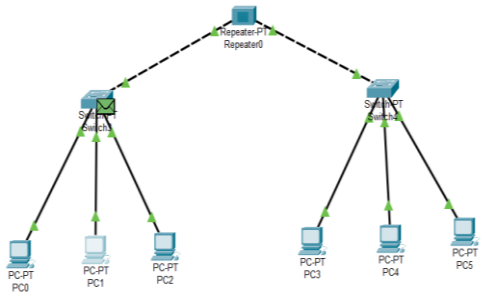

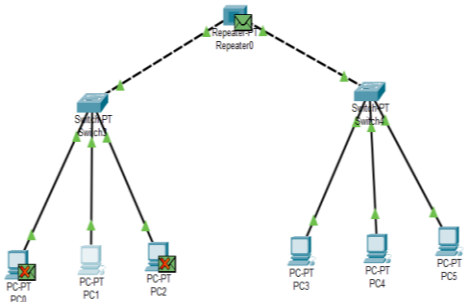

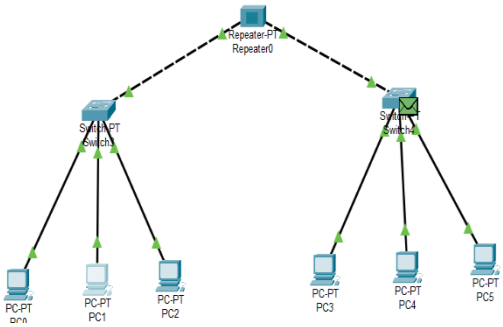

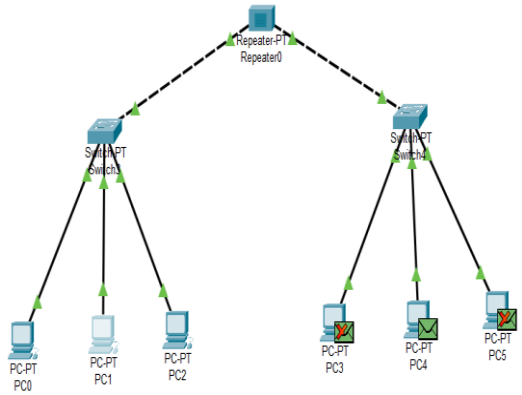

Time(sec)	Last Device	At Device	Type
0.000	--	PC1	ICMP
0.000	--	PC1	ARP
0.001	PC1	Switch3	ARP
0.002	Switch3	PC0	ARP
0.002	Switch3	PC2	ARP
0.002	Switch3	Repeater0	ARP
0.003	Repeater0	Switch4	ARP
0.004	Switch4	PC3	ARP
0.004	Switch4	PC4	ARP
0.004	Switch4	PC5	ARP

Command Prompt

```
Packet Tracer PC Command Line 1.0
C:\>ping 192.168.1.5

Pinging 192.168.1.5 with 32 bytes of data:

Reply from 192.168.1.5: bytes=32 time=16ms TTL=128
Reply from 192.168.1.5: bytes=32 time=8ms TTL=128
Reply from 192.168.1.5: bytes=32 time=8ms TTL=128
Reply from 192.168.1.5: bytes=32 time=8ms TTL=128

Ping statistics for 192.168.1.5:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 8ms, Maximum = 16ms, Average = 10ms

C:\>
```