
Revisions			
Rev.	Date	Author	Description
A	21/01/2018	Florent de Labarre	
B	10/04/2018	Florent de Labarre	

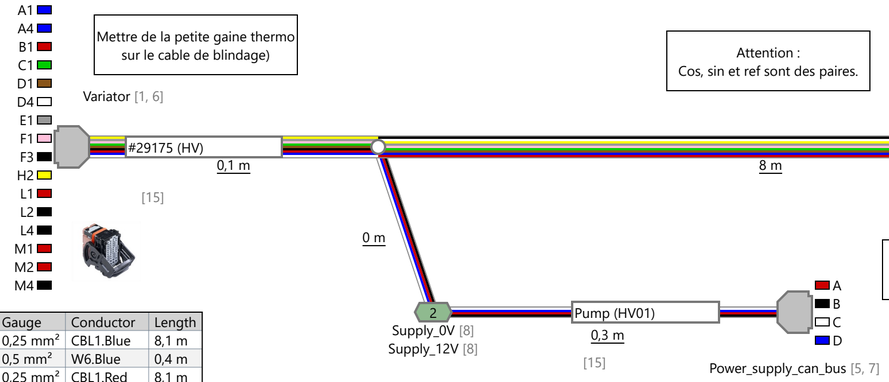

Encoder_Cable

Cavity	To	Color	Gauge	Conductor	Length
1_ref_high	Variator.F1		0,25 mm²	CBL1.Pink	8,1 m
2_ref_low	Variator.E1		0,25 mm²	CBL1.Gray	8,1 m
3_cos_high	Variator.B1		0,25 mm²	CBL1.Red	8,1 m
4_cos_low	Variator.A1		0,25 mm²	CBL1.Blue	8,1 m
5_sin_high	Variator.D1		0,25 mm²	CBL1.Brown	8,1 m
6_sin_low	Variator.C1		0,25 mm²	CBL1.Green	8,1 m
9_KTY_high	Variator.H2		0,5 mm²	W12.Yellow	8,1 m
10_KTY_low	Supply_0V		0,5 mm²	CBL1.White-Big	8 m
Shield	Variator.F3				8,1 m

Variator

Cavity	To	Color	Gauge	Conductor	Length
A1	Encoder_Cable.4_cos_low		0,25 mm²	CBL1.Blue	8,1 m
A4	Power_supply_can_bus.D		0,5 mm²	W6.Blue	0,4 m
B1	Encoder_Cable.3_cos_high		0,25 mm²	CBL1.Red	8,1 m
C1	Encoder_Cable.6_sin_low		0,25 mm²	CBL1.Green	8,1 m
D1	Encoder_Cable.5_sin_high		0,25 mm²	CBL1.Brown	8,1 m
D4	Power_supply_can_bus.C		0,5 mm²	W7.White	0,4 m
E1	Encoder_Cable.2_ref_low		0,25 mm²	CBL1.Gray	8,1 m
F1	Encoder_Cable.1_ref_high		0,25 mm²	CBL1.Pink	8,1 m
F3	Encoder_Cable.Shield				8,1 m
H2	Encoder_Cable.9_KTY_high		0,5 mm²	W12.Yellow	8,1 m
L1	Supply_12V		0,5 mm²	W10.Red	0,1 m
L2	Supply_0V		0,5 mm²	W13.Black	0,1 m
L4	Supply_0V		0,5 mm²	W3.Black	0,1 m
M1	Supply_12V		0,5 mm²	W8.Red	0,1 m
M2	Supply_12V		0,5 mm²	W9.Red	0,1 m
M4	Supply_0V		0,5 mm²	W15.Black	0,1 m


Supply_0V, Supply_12V

From	To	Conductor	Color	Gauge
Supply_0V	Encoder_Cable.10_KTY_low	CBL1.White-Big		0,5 mm²
Supply_0V	Power_supply_can_bus.B	W1.Black		1 mm²
Supply_0V	Variator.L2	W13.Black		0,5 mm²
Supply_0V	Variator.L4	W3.Black		0,5 mm²
Supply_0V	Variator.M4	W15.Black		0,5 mm²
Supply_12V	Power_supply_can_bus.A	W2.Red		1 mm²
Supply_12V	Variator.L1	W10.Red		0,5 mm²
Supply_12V	Variator.M1	W8.Red		0,5 mm²
Supply_12V	Variator.M2	W9.Red		0,5 mm²

Power_supply_can_bus

Cavity	To	Conductor	Color	Gauge	From Contact PN	Twisted With
A	Supply_12V	W2.Red		1 mm²	Delphi_150_contact_male	
B	Supply_0V	W1.Black		1 mm²	Delphi_150_contact_male	
C	Variator.D4	W7.White		0,5 mm²	Delphi_150_contact_male	W6
D	Variator.A4	W6.Blue		0,5 mm²	Delphi_150_contact_male	W7

Codeur Check Mesurement, test before start :
Ref (Pink - F1 / Grey - E1) : 80 Ohm
Cos (Red - B1 / Blue - A1) : 70 Ohm
Sin (Yellow-Brown - D1 / Green - C1) : 70 Ohm
CAN BUS (A4-D4) : 60 Ohm

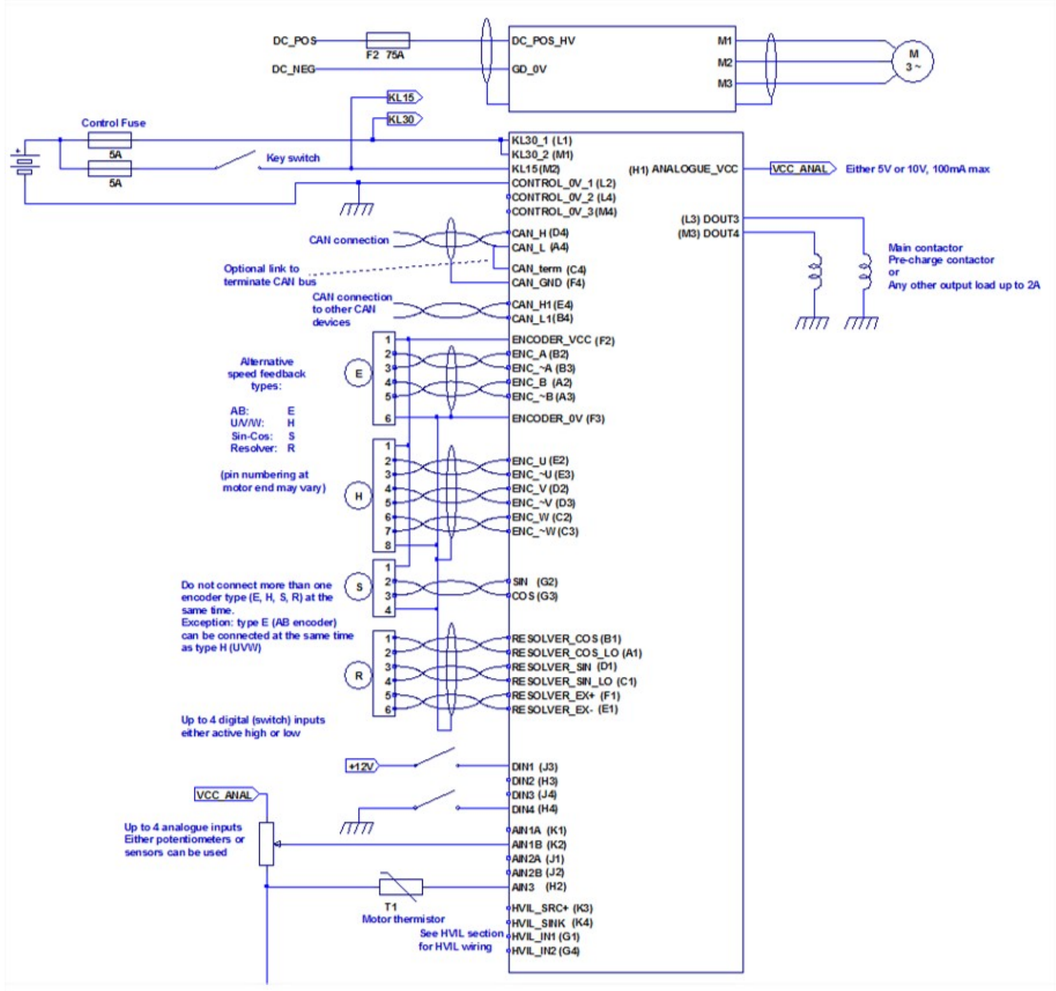

Bill of Materials

Id	Type	Manufacturer	Part Number	Description	Quantity
1	Boot	Molex	Connecteurs automobile CMC WIRE CAP FOR 28P AND 48P	538-64320-1301	1
2	Cable		2 Wire (1 twisted pair), 20 AWG Unshielded	Generic Cable	0 in
3	Cable	LAPP	#20811 - Câble vert OLFLEX (4x2x0.25mm² + 2x0.5mm²) LAP0036927		8,1 m
4	Connector		CMP71_encodeur_cable		1
5	Connector	Delphi	#26525 - Delphi_150_4_way_male	829-12160825	1
6	Connector	Molex	#27627- Connecteur Molex 48 Pin	538-64320-1311	1
7	Contact	Delphi	Delphi_150_contact_male		4
8	Splice		Generic Splice	Generic Splice	2
9	Wire		0.5mm² Black		0,3 m
10	Wire		0.5mm² Red		0,3 m
11	Wire		1mm² - Blue		0 in
12	Wire		1mm² - White		0 in
13	Wire		1mm² Black		0,3 m
14	Wire		1mm² Red		0,3 m
15	Label		Generic White Label	Generic Label	2
16	Wire		0.5 mm² - Blue		0,4 m
17	Wire		0.5 mm² - White		0,4 m
18	Wire		Yellow	Generic Wire	0 in
19	Wire		0.5² yellow		8,1 m

	Name	Date
Drawn By	----	----
Eng Approved	----	----
Mfg Approved	----	----
QA	----	----

Title: #29175 - Engine_pump_encoder_controler HVLP (HV) - A2

Description:

Revision: ----

This document contains confidential and proprietary information that cannot be reproduced or divulged, in whole or in part, without written authorization.