Revisions			
Rev.	Date	Author	Description
A	21/01/2018	Florent de Labarre	
B	10/04/2018	Florent de Labarre	
C	19/05/2021	E.P	Ajout cavité Encoder Cable
D	26/05/2021	E.P	Modifs erreur couleur cable resolveur hvlp
E	01/03/2022	E.P	MaJ Faisceau complet


Codeur Check Mesurement, test before start :
Ref (Pink - F1 / Grey - E1) : 80 Ohm
Cos (Red - B1 / Blue - A1) : 70 Ohm
Sin (Yellow-Brown - D1 / Green - C1) : 70 Ohm
CAN BUS (A4-D4) : 60 Ohm

Utiliser câble:
[37264] Cordon Molex précablé
Engine pump HVLP

Mettre de la petite gaine thermo sur le cable de blindage)

Attention :
Cos, sin et ref sont des paires.

Connecteur Rond métalique (déjà fait)

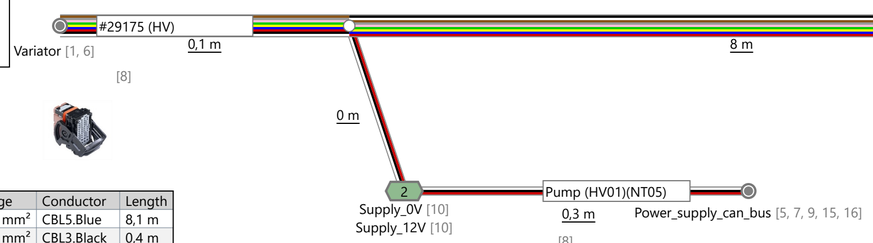

Encoder_Cable

	Cavity	To	Color	Gauge	Conductor	Length
A	1_ref_high	Variator.F1		0,5 mm²	CBL5.Pink	8,1 m
B	2_ref_low	Variator.E1		0,5 mm²	CBL5.Gray	8,1 m
C	3_cos_high	Variator.B1		0,25 mm²	CBL5.Red	8,1 m
D	4_cos_low	Variator.A1		0,25 mm²	CBL5.Blue	8,1 m
E	5_sin_high	Variator.D1		0,25 mm²	CBL5.Yellow	8,1 m
F	6_sin_low	Variator.C1		0,25 mm²	CBL5.Green	8,1 m
G	9_KTY_high	Variator.H2		0,25 mm²	CBL5.Brown	8,1 m
H	10_KTY_low	Supply_0V		0,25 mm²	CBL5.White	8 m
I	Shield	Variator.F3	Masse			8,1 m

Variator

Cavity	To	Color	Gauge	Conductor	Length
A1	Encoder_Cable.4_cos_low		0,25 mm²	CBL5.Blue	8,1 m
A4	Power_supply_can_bus.D		0,75 mm²	CBL3.Black	0,4 m
B1	Encoder_Cable.3_cos_high		0,25 mm²	CBL5.Red	8,1 m
C1	Encoder_Cable.6_sin_low		0,25 mm²	CBL5.Green	8,1 m
D1	Encoder_Cable.5_sin_high		0,25 mm²	CBL5.Yellow	8,1 m
D4	Power_supply_can_bus.C		0,75 mm²	CBL3.White	0,4 m
E1	Encoder_Cable.2_ref_low		0,5 mm²	CBL5.Gray	8,1 m
F1	Encoder_Cable.1_ref_high		0,5 mm²	CBL5.Pink	8,1 m
F3	Encoder_Cable.Shield				8,1 m
H2	Encoder_Cable.9_KTY_high		0,25 mm²	CBL5.Brown	8,1 m
L1	Supply_12V		0,5 mm²	W10.Red	0,1 m
L2	Supply_0V		0,5 mm²	W13.Black	0,1 m
L4	Supply_0V		0,5 mm²	W3.Black	0,1 m
M1	Supply_12V		0,5 mm²	W8.Red	0,1 m
M2	Supply_12V		0,5 mm²	W9.Red	0,1 m
M4	Supply_0V		0,5 mm²	W15.Black	0,1 m


Power_supply_can_bus

Cavity	To	Conductor	Color	Gauge	Twisted With
A	Supply_12V	W2.Red		1 mm²	
B	Supply_0V	W1.Black		1 mm²	
C	Variator.D4	CBL3.White		0,75 mm²	
D	Variator.A4	CBL3.Black		0,75 mm²	

Utiliser câble blindé pour CAN bus

Supply_0V, Supply_12V

From	To	Conductor	Color	Gauge
Supply_0V	Encoder_Cable.10_KTY_low	CBL5.White		0,25 mm²
Supply_0V	Power_supply_can_bus.B	W1.Black		1 mm²
Supply_0V	Variator.L2	W13.Black		0,5 mm²
Supply_0V	Variator.L4	W3.Black		0,5 mm²
Supply_0V	Variator.M4	W15.Black		0,5 mm²
Supply_12V	Power_supply_can_bus.A	W2.Red		1 mm²
Supply_12V	Variator.L1	W10.Red		0,5 mm²
Supply_12V	Variator.M1	W8.Red		0,5 mm²
Supply_12V	Variator.M2	W9.Red		0,5 mm²

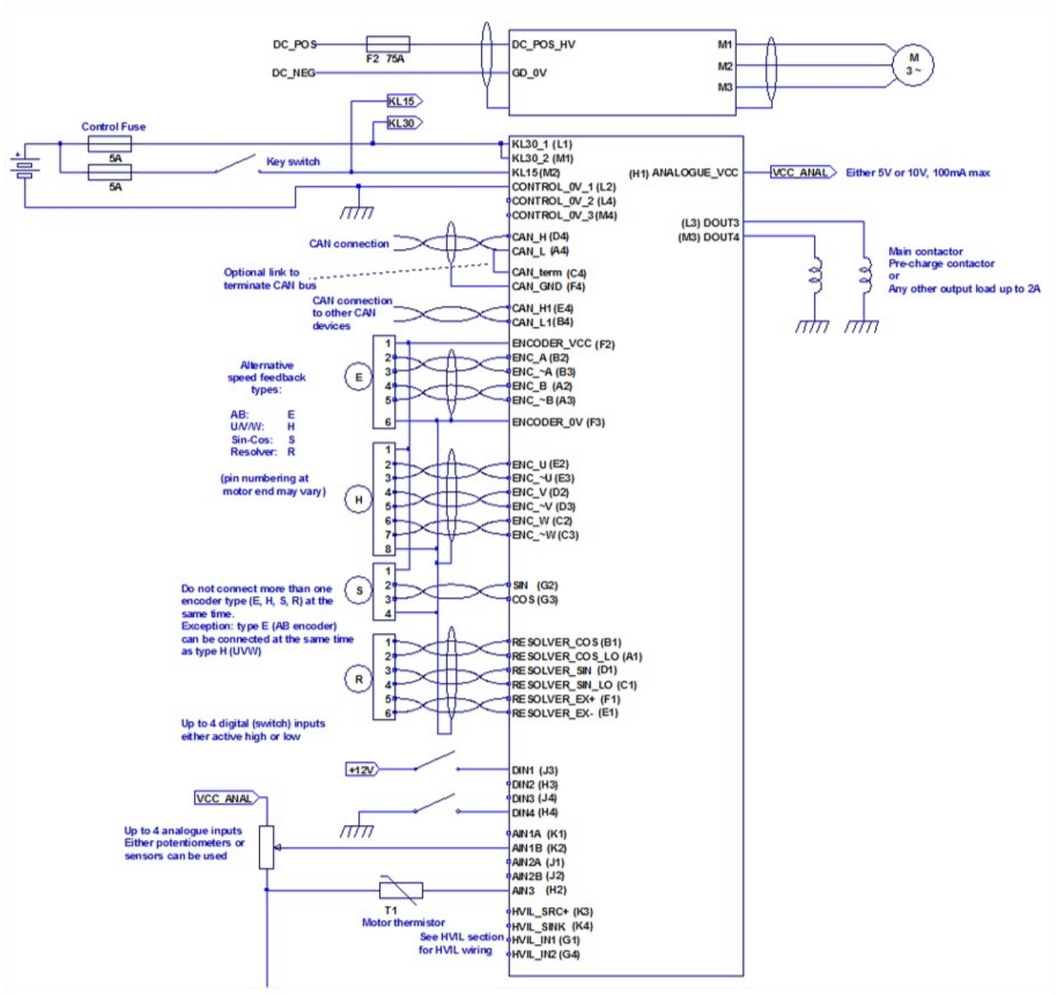

Title	#29175 - Engine_pump_encoder_controler HVLP (HV) - IND E	
Description		Revision

	Name	Date
Drawn By	----	----
Eng Approved	----	----
Mfg Approved	----	----
QA	----	----

This document contains confidential and proprietary information that cannot be reproduced or divulged, in whole or in part, without written authorization.

Title:	#29175 - Engine_pump_encoder_controler HVLP (HV) - IND E
Description:	

Id	Type	Part Number	Quantity	Description	Manufacturer
1	Boot	#23323 - Molex Wire Cap for CMC 28P AND 48P	1	Molex 64320-1301	Molex
2	Cable	#10412 - Câble vert SEW (Resolveur HV) - (3x2x0.25² + 2x0.5²)	8,1 m	Relie servomoteur au variateur HVLP	SEW
3	Cable	#33491 Belden shielded twisted pair 0.75mm²	0,4 m	Belden 8760 060250	Belden
4	Connector	CMP71_encodeur_cable	1		
5	Connector	#26525 - Delphi_150_4_way_male	1	Delphi 12160825	Delphi
6	Connector	#27627- Molex CMC48 Pin connector	1	Molex 64320-1311	Molex
7	Contact	#10019 Delphi_150_contact_male 0.5-1.0mm² 1.69-2.78mm	4	Delphi 12045773	Delphi
8	Label	Generic White Label	2	Generic Label	
9	Lock	#23010 - Delphi_150_4_way_male_lock	1	Delphi 12176368	Delphi
10	Splice	Generic Splice	2	Generic Splice	
11	Wire	0.5mm² Black	0,3 m		
12	Wire	0.5mm² Red	0,3 m		
13	Wire	1mm² Black	0,3 m		
14	Wire	1mm² Red	0,3 m		
15	Wire Seal	#17898 - Delphi 150 Cable seal – White – 1.60-2.15	2	Delphi 12089442	Delphi
16	Wire Seal	#14820 - Delphi 150 Cable seal – Blue – 1.29-1.70	2	Delphi 12052925	Delphi