


Model FOL-101

Perimeter Intrusion Detection System for Fence and Buried Perimeters

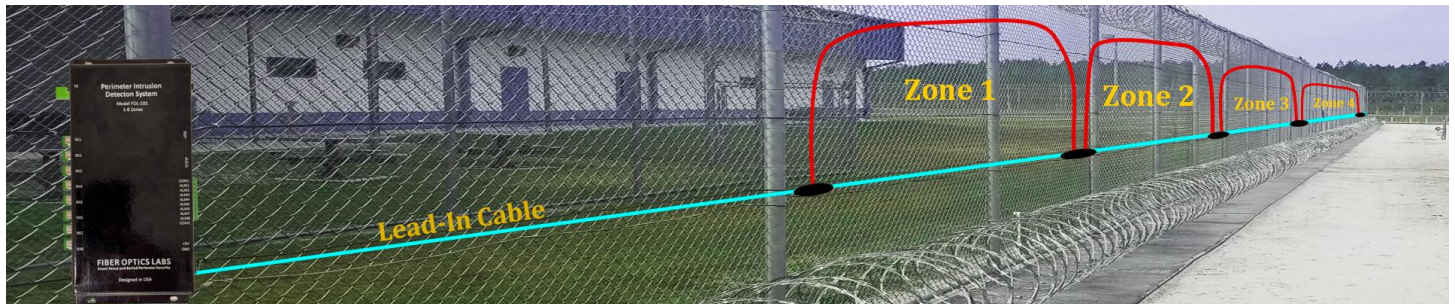

Model FOL-101 is a 1-8 zone perimeter intrusion detection controller that is easy to install, configure, and tune, yet remains sensitive and reliable. The installation of the cable on the fence is quick and simple. Each of the 8 zones can be individually tuned and covers a range of up to 500 m in length. The insensitive lead can be up to 20 km, which allows the controller to be located in a controller room far from the sensing zones.

The system uses sophisticated frequency and time-based algorithms for detection and advanced background rejection leading to superior Probability of Detection and a low nuisance alarm rate. Intelligent background rejection removes the effect of undesirable factors such as wind, rain, thunder, vehicles, trains, planes, etc. In addition, the User Interface is developed to be intuitive and with a high degree of automation to make it highly user friendly. The system can be used on most flexible and rigid fence perimeters. Lead-in capabilities allow for sensing to start right on the fence while the system is installed inside a control room or installed outdoor.

The system reports the alarms through 8 zone relays, one for each zone, or TCP/IP interface via XML. The system can be configured using a USB port with a configuration software running on a PC. Alarm history and time/frequency data are also accessible for configuration and tuning.

Features

- Up to 8 zones per controller
- Total perimeter coverage of up to 4000 m, each zone up to 500 m range.
- Up to 20 km of insensitive lead cable
- Perimeter solution for Fence, buried, and wall tops
- Uses fiber-optic sensors, immune to EMI/RFI/Lightning
- Controller has extended temperature range and can be installed indoor or outdoor
- Alarm integration with 3rd party devices using TCP/IP interface or dedicated relays
- High reliability by design
- Pattern-recognition algorithms for high PD and low NAR
- Location accuracy within the zone
- Easy system installation and tuning
- No electrical power in the field
- Zones defined by sensing cable installation

SPECIFICATIONS

System

Max number of zones	8
Max sensing range per zone	500m
Max lead-in length	20 km
Max sensing range per controller	4 km
Alarm Location Accuracy	Within the zone
Installation Medium	Fence, buried, wall tops

Features for High Reliability

Power Supply	External 5V power supply, 2 Amp, field replaceable
--------------	--

Sensor Cable

Cable Type	Gel-filled loose tubes, armored or unarmored, Outdoor rated cable
Sensing Fiber	Multimode Fiber
Lead-in fiber	Single mode fiber
Optical Connectors	SC/APC

Electrical

Consumption	3W maximum, 2W typical
Requirements	5 Volts DC input

Interfaces

Default Alarm Interface	Relay contacts and LED indicators for each zone. XML over TCP/IP
USB	Configuration, tuning, and optional alarm outputs via XML via a PC

Mechanical

Dimensions	194 x 103 x 36 mm
Weight	400 gm

Environmental

Temperature of Controller	-40°C to 70°C (-40° F to 158°F)
Temperature of Cable (in Field):	-40°C to 70°C (-40° F to 158°F)
Humidity of Controller	20% to 80%, non-condensing
Humidity of Cable (in Field)	No restriction



Other Related Products

FOL-102	Up to 32 zones
FR201	Up to 20km point locating
FR302	Long range classification system, up to 100km point locating

FIBER OPTICS LABS

B-704, Tower-B, Cyber Park 62, Noida,
U.P. – 201309, India

Email: Sales@FiberOpticsLabs.com

www.FiberOpticsLabs.com

Ph.# +91 8287607598

D101a