Mic strip (one design, build two) - back (parts side), seen from the back

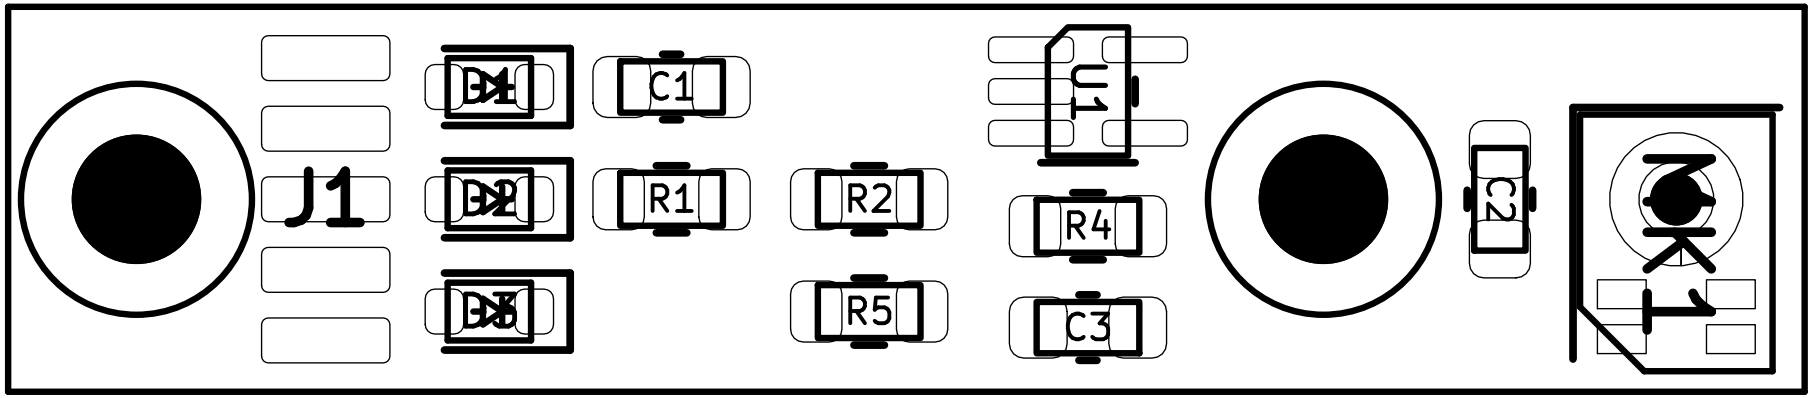

All parts fitted, none DNP. R5 0 R on both strips (L/R comes from the cable SEL wire).
MK1 sits over the 0.8 mm port hole: keep paste, flux and residue out of the hole.
D1-D3 ESD321: pin 1 = GND = the dot / notch on the body; here the bar end of the fab symbol and the closed end of the silk bracket (right). Check by diode test.
J1 wire pads, top to bottom on this view: 1 VDD, 2 GND, 3 CLK, 4 SEL, 5 DATA (cable order).