


White outside. Color at the edges.

The telescoping box keeps the clean white presentation of the reference: centered Ble(e)p identity, restrained product naming, and cropped color loops at the lid edges. Inside, a white bridge insert presents the controller while hiding the USB-C cable below; the quick-start card sits on top.

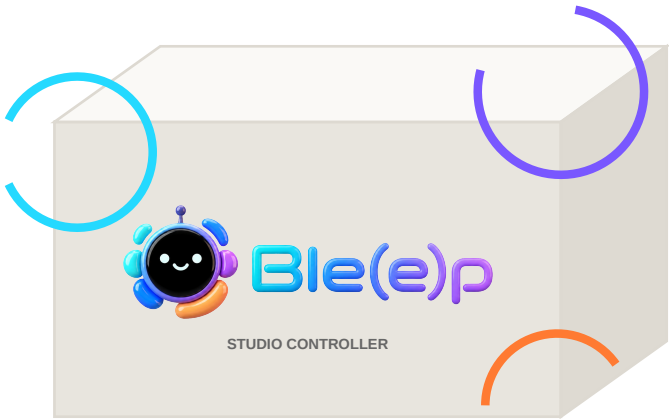


01	LID	160 x 95 mm panel; 30 mm walls
02	CARD	140 x 75 mm; QR and prototype ID
03	DEVICE	118 x 48 x about 21 mm
04	INSERT	17 mm cable bay; 116 x 44 mm pocket
05	BASE	155 x 90 mm panel; 45 mm walls

START WITH PAPER

Print pages 2-4 at Actual Size. Verify the calibration bar, cut the magenta lines, score the dashed cyan lines, and assemble with removable tape. The first goal is fit and opening behavior, not final materials.

Lid dieline - print at 100%

160 x 95 x 30 mm

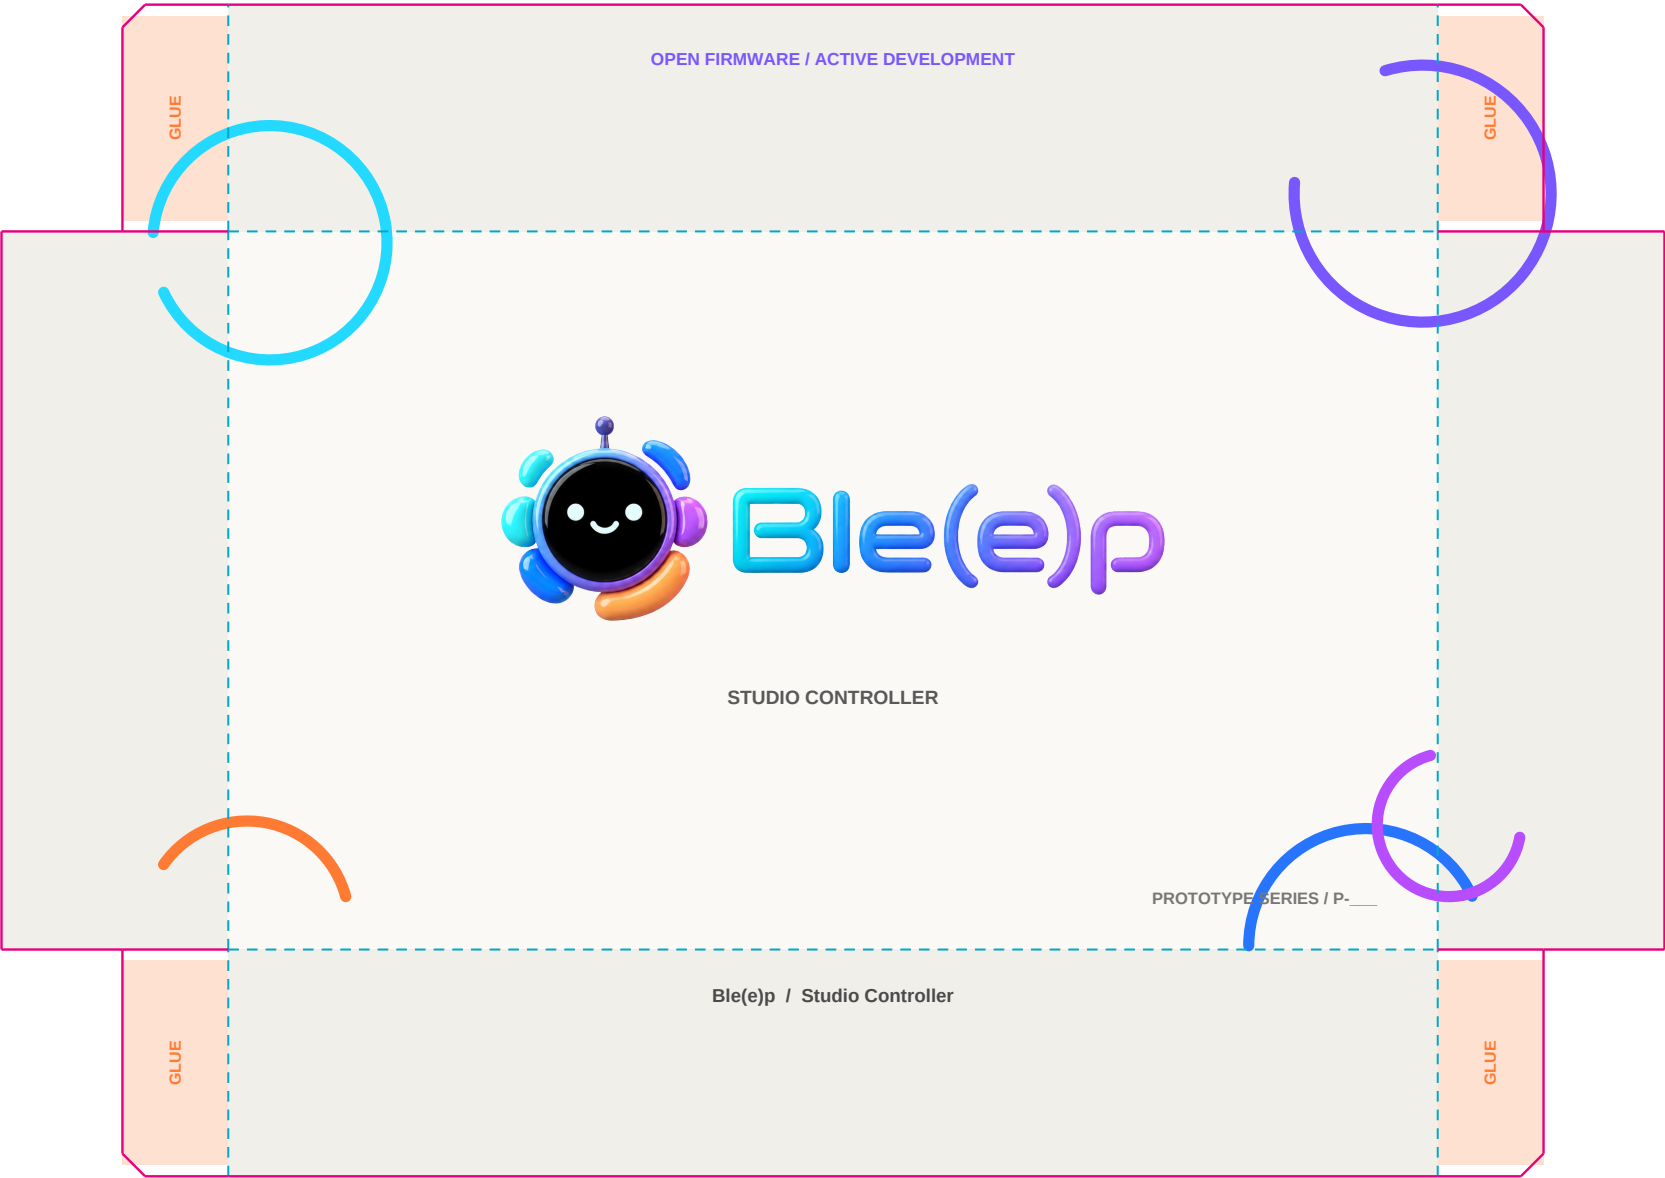


CUT

SCORE / FOLD

50 mm - measure before cutting


Base dieline - print at 100%

155 x 90 x 45 mm

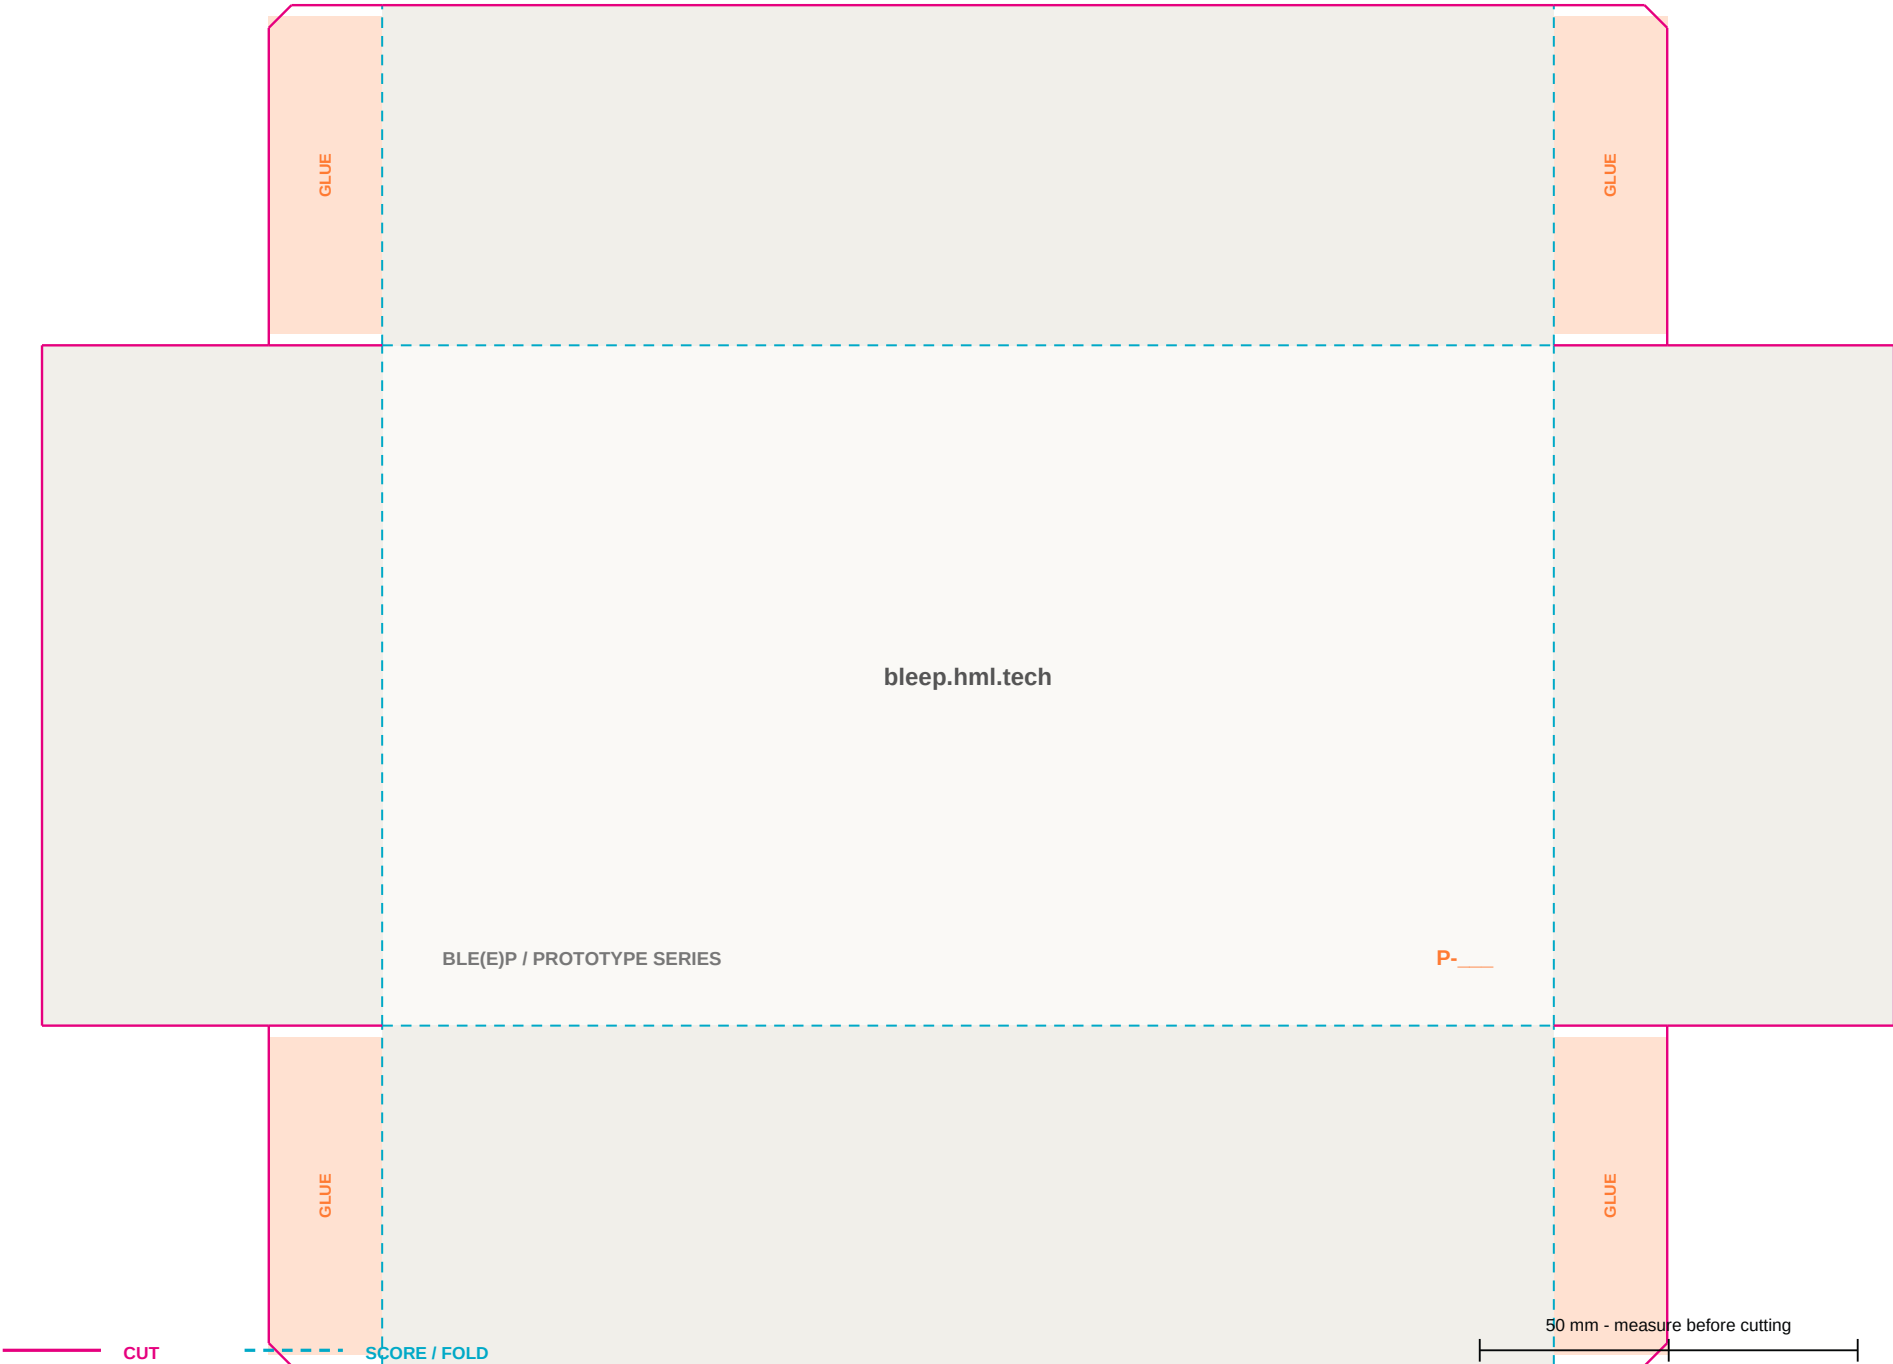

Bridge insert

151 x 86 mm platform / 17 mm cable bay

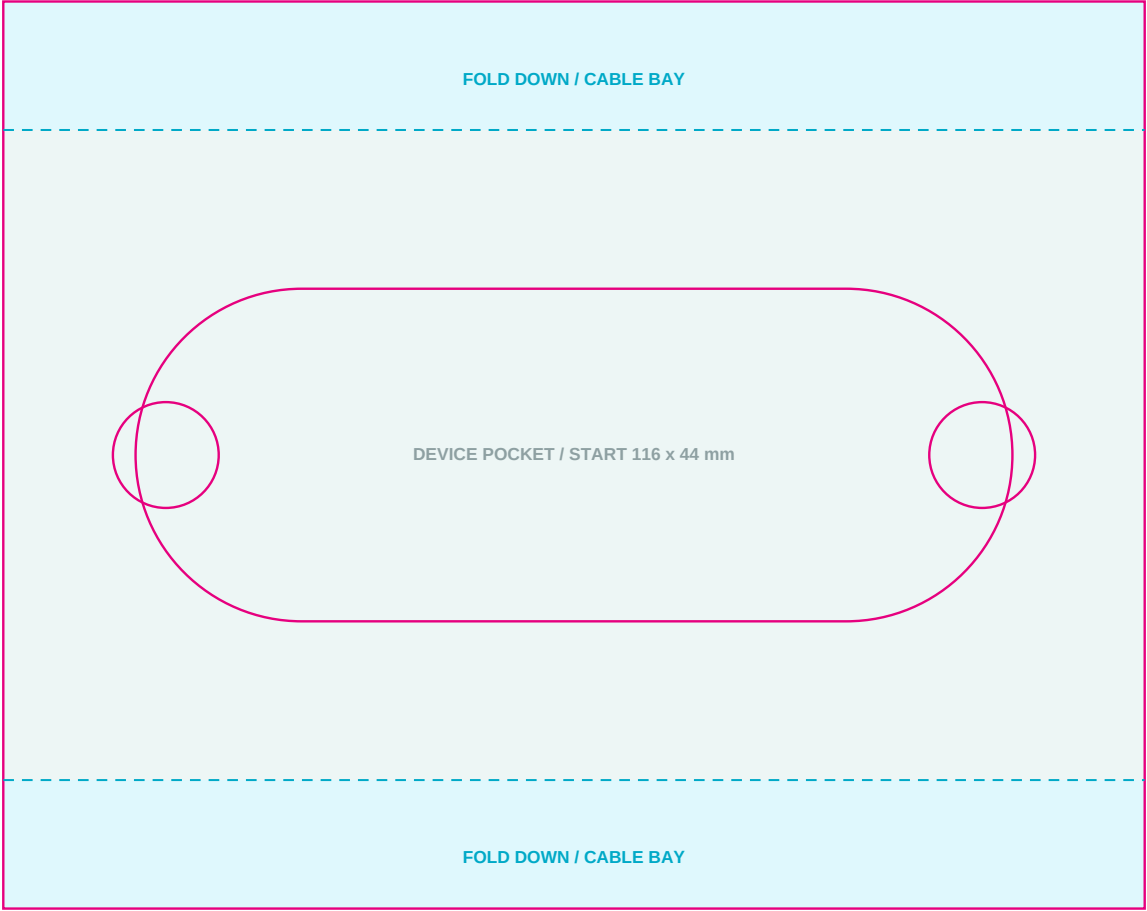

 CUT

 SCORE / FOLD

50 mm - measure before cutting



Quick-start card

140 x 75 mm / print duplex or glue back-to-back

FRONT



STUDIO CONTROLLER

PROTOTYPE SERIES / UNIT P-__

BACK

START HERE

- 1** Turn on with the side power switch.
- 2** Choose Devices, Scenes, or Portal from Home.
- 3** Hold the Action Button 700 ms to go Back.

Hold it 2 seconds to return Home.



PROTOTYPE - NOT FOR RESALE

GUIDE + FEEDBACK

For a duplex card, use the printer's short-edge setting and run one plain-paper alignment test. Otherwise print both faces, trim, and mount them back-to-back on 300-350 gsm stock.

Fit and handling test

Do this before ordering five boxes

01 / SCALE

+

Print at Actual Size; the 50 mm bar must measure within 0.5 mm.

+

Use plain paper first, then the intended prototype board.

02 / FIT

+

The lid seats without bowing and lifts in roughly 2-3 seconds.

+

The controller does not rub, rattle, or press its Action Button.

+

The folded cable stays below the insert and never touches the case.

+

The card lies flat and can be removed without lifting the device.

03 / OPENING EXPERIENCE

+

A tester sees the quick-start card first and the controller second.

+

Finger openings make the controller removable without pulling wires.

+

No raw adhesive, sharp board edge, or loose print debris is exposed.

04 / HANDLING

+

Shake the closed box ten times in each axis; contents must not migrate.

+

Use an inert device-shaped weight for initial 75 cm face, edge, and corner drop tests inside the intended shipping carton.

+

After geometry passes, repeat only with a powered-off, inspected unit. Never test with a swollen, damaged, hot, or suspect LiPo.

+

Place 2 kg evenly on the closed package for 24 hours; reject crushing that changes lid fit or touches the device.

05 / RECORD

+

Mark the prototype P-001 through P-005 and record board material.

+

Photograph wear, note every interference point, and revise dimensions in 0.5 mm increments before requesting a vendor sample.

PASS GATE

Order the five presentation boxes only after the same physical device, card, and cable pass the paper and board prototypes without movement, button activation, abrasion, or lid interference.