


Experiment: Configure IP address to routers in packet tracer.
Explore the following messages: ping responses, destination unreachable, request timed out, reply

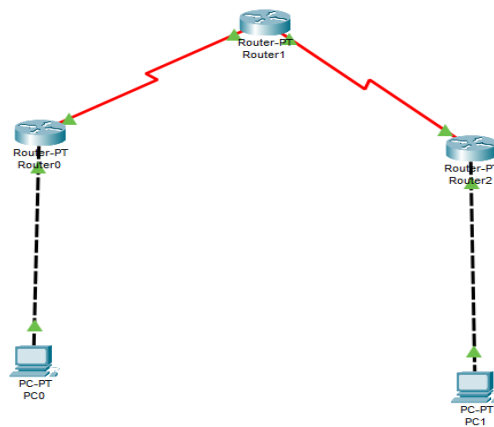

```
Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface serial 2/0
Router(config-if)#ip address 20.0.0.2 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface Serial2/0, changed state to up
exit
Router(config)#inter
%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
Router(config)#
Router(config)#interface serial 3/0
Router(config-if)#ip address 30.0.0.1 255.0.0.0
Router(config-if)#clock rate 64000
Router(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial3/0, changed state to down
Router(config-if)#exit
Router(config)#ip route 10.0.0.0 255.0.0.0 20.0.0.1
Router(config)#ip route 40.0.0.0 255.0.0.0 30.0.0.2
Router(config)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console

%LINK-5-CHANGED: Interface Serial3/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial3/0, changed state to up

Router#
Router#ping 30.0.0.2

Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 30.0.0.2, timeout is 2 seconds:
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 6/7/9 ms
```

PC0

Physical Config Desktop Programming Attributes

Command Prompt

```
Cisco Packet Tracer PC Command Line 1.0
C:\>ping 10.0.0.1

Pinging 10.0.0.1 with 32 bytes of data:

Reply from 10.0.0.1: bytes=32 time<1ms TTL=255
Reply from 10.0.0.1: bytes=32 time<1ms TTL=255
Reply from 10.0.0.1: bytes=32 time<1ms TTL=255
Reply from 10.0.0.1: bytes=32 time<1ms TTL=255

Ping statistics for 10.0.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 0ms, Average = 0ms

C:\>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Reply from 40.0.0.10: bytes=32 time=7ms TTL=125
Reply from 40.0.0.10: bytes=32 time=8ms TTL=125
Reply from 40.0.0.10: bytes=32 time=5ms TTL=125
Reply from 40.0.0.10: bytes=32 time=2ms TTL=125

Ping statistics for 40.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 8ms, Average = 5ms

C:\>ping 40.0.0.10

Pinging 40.0.0.10 with 32 bytes of data:

Reply from 40.0.0.10: bytes=32 time=8ms TTL=125
Reply from 40.0.0.10: bytes=32 time=3ms TTL=125
Reply from 40.0.0.10: bytes=32 time=10ms TTL=125
Reply from 40.0.0.10: bytes=32 time=12ms TTL=125
```

```
would you like to enter the initial configuration dialog? [yes/no]: no

Press RETURN to get started!

Router>enable
Router#config t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#interface fastEthernet 0/0
Router(config-if)#ip address 10.0.0.1 255.0.0.0
Router(config-if)#no shutdown

Router(config-if)#
%LINK-5-CHANGED: Interface FastEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/0, changed state to up
exit
Router(config)#interface serial 2/0
Router(config-if)#ip address 20.0.0.1 255.0.0.0
Router(config-if)#clock rate 64000
Router(config-if)#no shutdown

%LINK-5-CHANGED: Interface Serial2/0, changed state to down
Router(config-if)#exit
Router(config)#ip route 40.0.0.0 255.0.0.0 20.0.0.2
Router(config)#end
Router#
%SYS-5-CONFIG_I: Configured from console by console

%LINK-5-CHANGED: Interface Serial2/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface Serial2/0, changed state to up
Router#ping 20.0.0.2
```