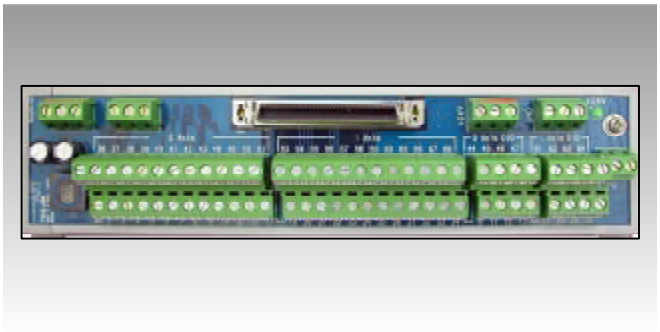
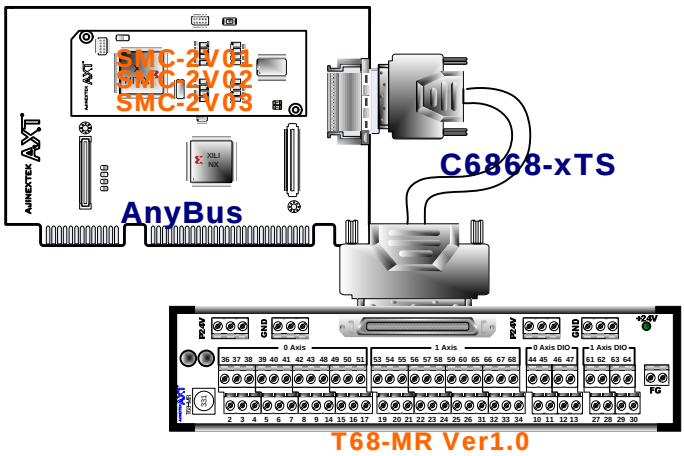
Motion 2 Axse Terminal Blocks

T68-MR Ver1.0



■ 제품 구성



■ 소개

모션 모듈 SMC-2V01, SMC-2V02, SMC-2V03의 2 Axes 전용 단자대로 모션 제어 신호를 결선하는 터미널 단자대입니다. 펄스 출력 리피터 기능과 범용 출력 접점의 전류증폭 기능이 내장되어 있습니다. 출력 접점은 각 채널 별로 동시에 최대 전류 300mA까지 사용할 수 있습니다.

■ 특징

- SMC-2V01, SMC-2V02, SMC-2V03 모션 모듈 전용 단자대
- 모션 제어 펄스 출력 신호 리피터 기능 내장
- 범용 출력 접점 동시 최대 전류 300mA 지원
- 외부 DC 24V 역전압 보호
- 외부 DC24V 전원 상태 표시 LED(Green)
- 오배선 방지 및 간결한 배선 구조

■ 전기적 사양

- 펄스 출력 리피터 길이: 20m 출력(모션 보드 TO 서보 드라이브)
- 입력 방식: Active Low
- 입력 Low 전압 범위: 0V ~ 12V
- 입력 High 전압 범위: 21V ~ 24V
- 출력 방식: 오픈 컬렉트 방식
- 출력 Sink 최대 전류: 300mA (8 접점 동시 사용)
- 전원 표시 LED: 1개 (Green)
- 동작 온도: 0 ~ 60°
- 보관 온도: -20° ~ 80°

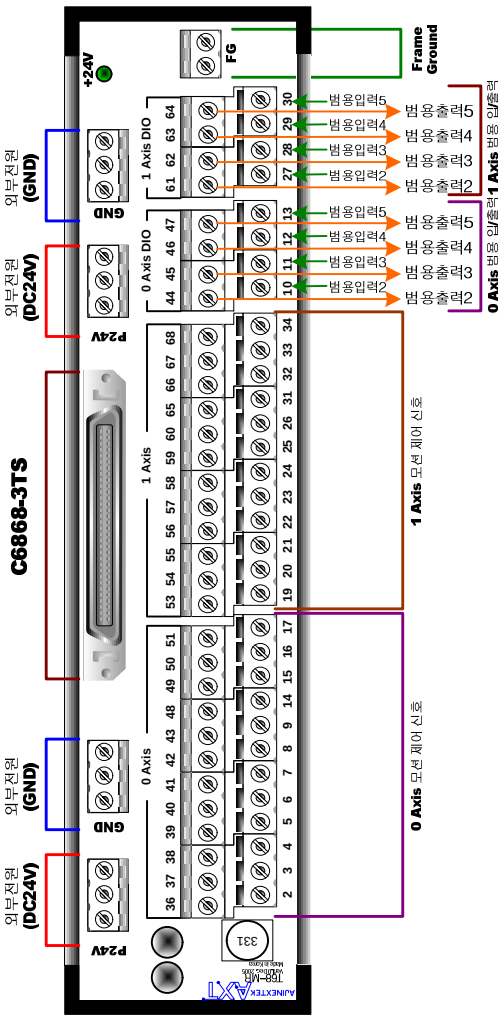
■ 외부 전원

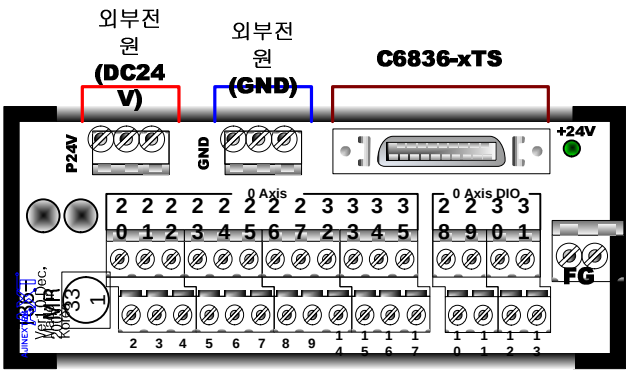
- 외부 입력 전압: DC 24V(±2V)
- 최대 소비 전류: 4A

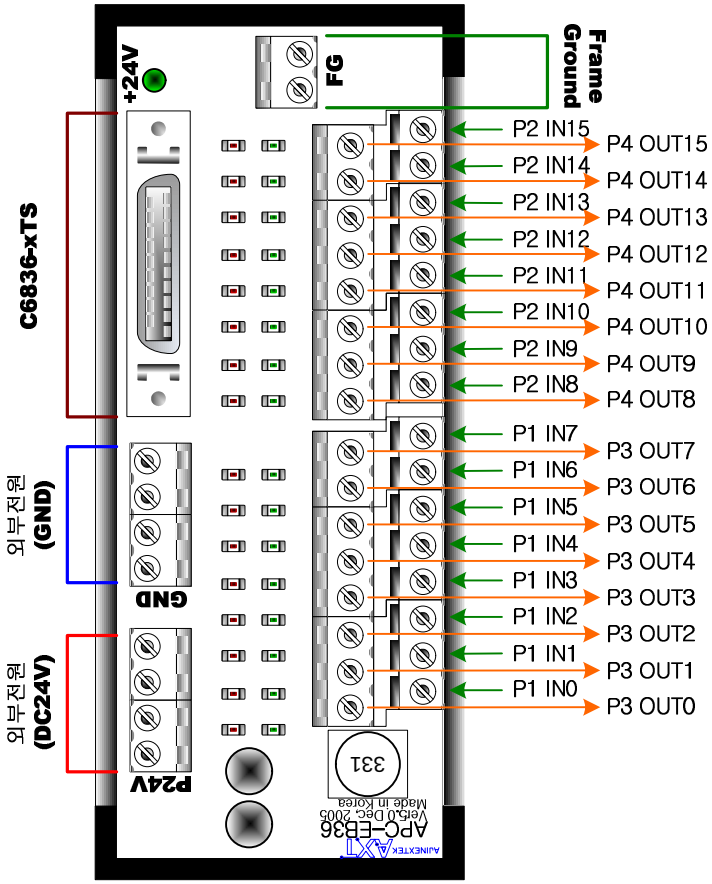
■ 외형 규격

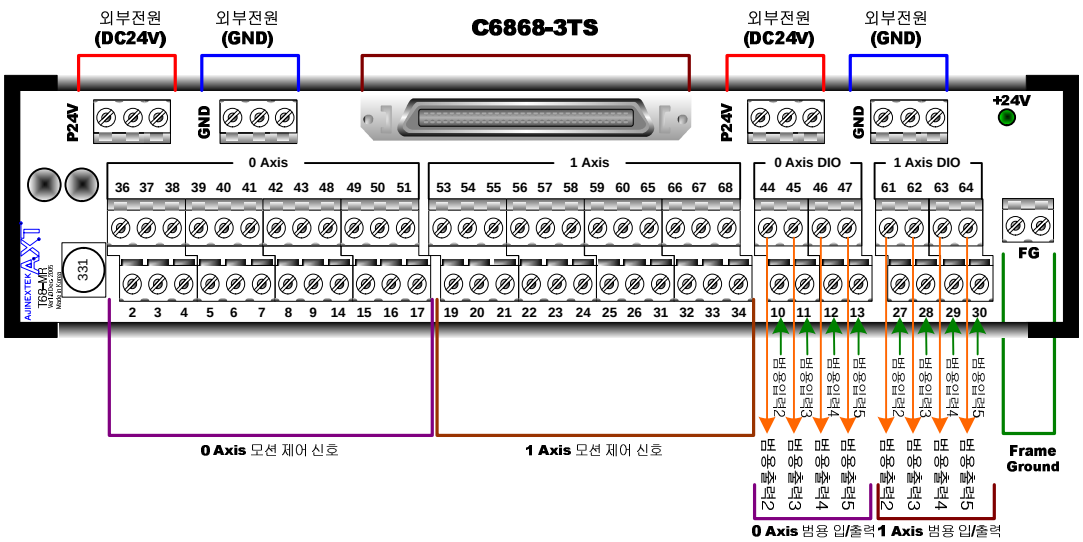
- 외형 치수: 212 x 52 x 41 (L x W x H)mm
- ECN1 커넥터: Miniature Ribbon Connector (2-175887-8, AMP)
- Screw Terminals: 5.0mm Pitch (TLD-200, SEOIL)
- 설치 환경: 35mm Rail

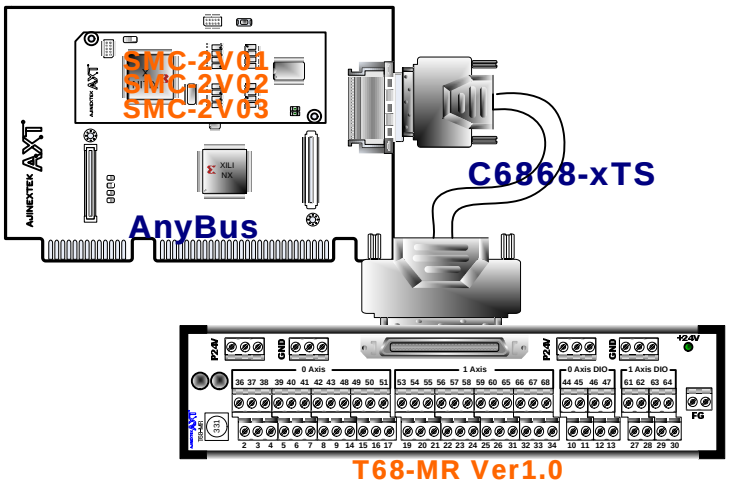
■ 외부 연결 커넥터 및 터미널 단자 접점 설명

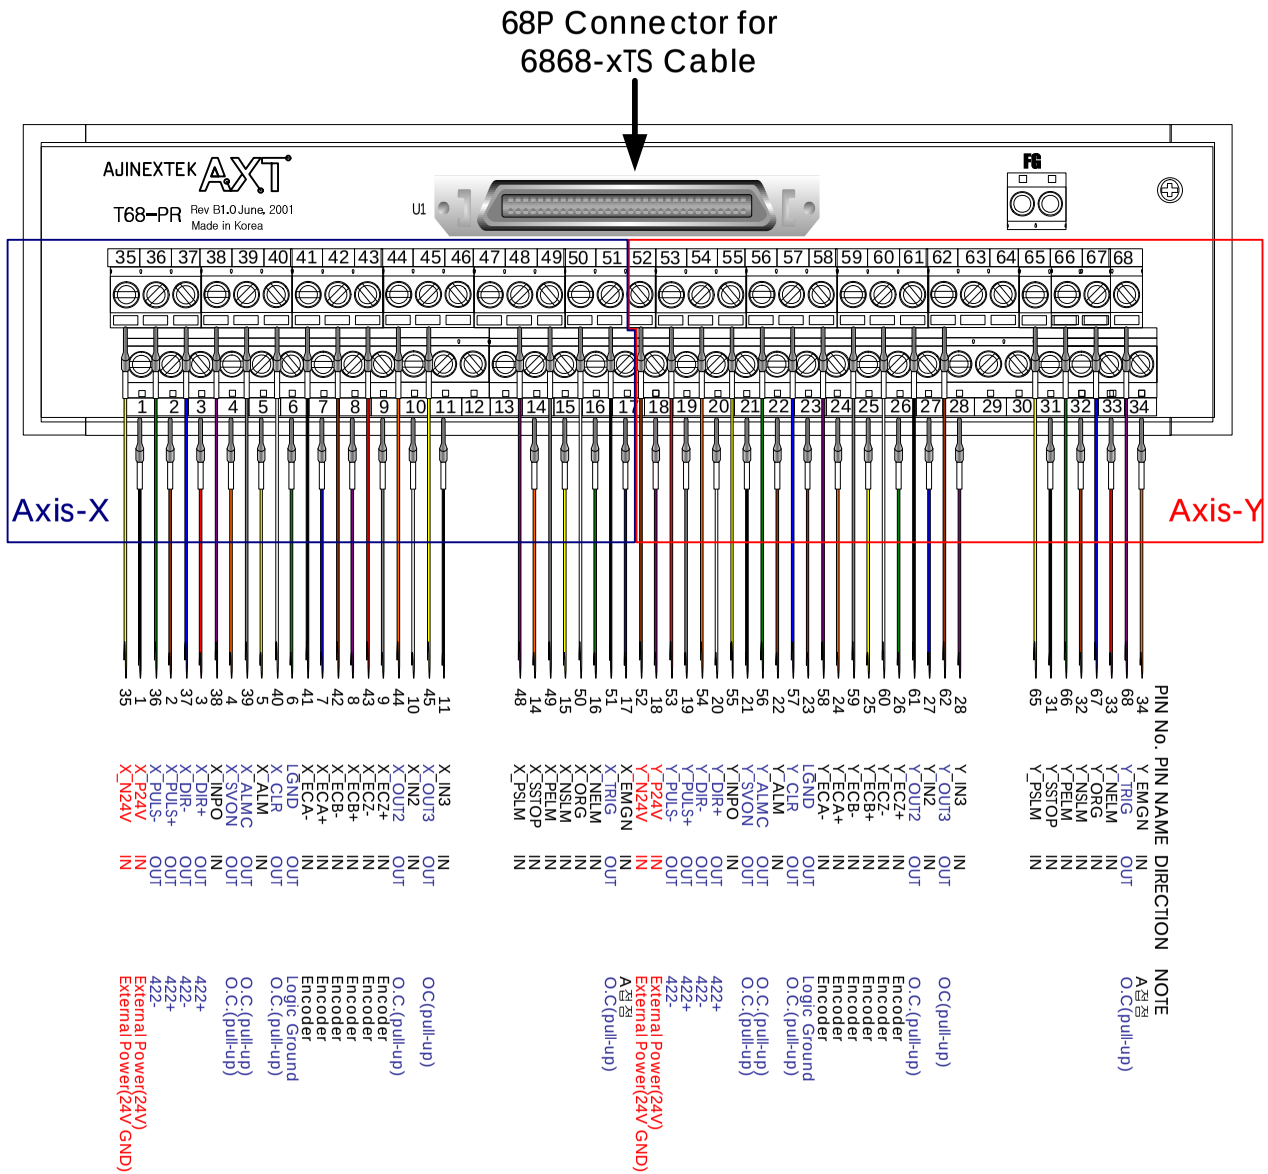



외부전원 (DC24V)
외부전원 (GND)
C6836-xTS
P24V
GND
+24V
0 Axis
0 Axis DIO
FG


C6836-xTS
+24V
FG
Frame Ground
외부전원 (GND)
외부전원 (DC24V)
GND
P24V
P2 IN15
P2 IN14
P2 IN13
P2 IN12
P2 IN11
P2 IN10
P2 IN9
P2 IN8
P1 IN7
P1 IN6
P1 IN5
P1 IN4
P1 IN3
P1 IN2
P1 IN1
P1 IN0
P4 OUT15
P4 OUT14
P4 OUT13
P4 OUT12
P4 OUT11
P4 OUT10
P4 OUT9
P4 OUT8
P3 OUT7
P3 OUT6
P3 OUT5
P3 OUT4
P3 OUT3
P3 OUT2
P3 OUT1
P3 OUT0


외부전원 (DC24V)
외부전원 (GND)
C6868-3TS
외부전원 (DC24V)
외부전원 (GND)
P24V
GND
+24V
0 Axis
1 Axis
0 Axis DIO
1 Axis DIO
FG
0 Axis 모션 제어 신호
1 Axis 모션 제어 신호
Frame Ground
0 Axis 범용 입/출력
1 Axis 범용 입/출력


SMC-2V01
SMC-2V02
SMC-2V03
AnyBus
C6868-xTS
T68-MR Ver1.0


68P Connector for
6868-xTS Cable
AJINEXTEK AXT
T68-PR Rev B1.0 June, 2001
Made in Korea
U1
FG
35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34
Axis-X
Axis-Y
PIN No. PIN NAME DIRECTION NOTE
35 X_IN3 IN OC(pull-up)
1 X_OUT3 OUT
36 X_IN2 IN O.C.(pull-up) Encoder
2 X_OUT2 OUT
37 X_ECZ+ IN
3 X_ECZ- IN
38 X_ECB+ IN
4 X_ECB- IN
39 X_ECA+ IN
5 X_ECA- IN
40 LGND Logic Ground
6 X_CLR OUT O.C.(pull-up)
41 X_ALM IN
7 X_ALMC IN
42 X_SVON OUT
8 X_INPO OUT
43 X_DIR+ OUT
9 X_DIR- OUT
44 X_PULS+ OUT
10 X_PULS- OUT
45 X_P24V IN External Power(24V)
11 X_N24V IN External Power(24V GND)
48 X_EMGN IN OC(pull-up)
14 X_PSLM IN
49 X_SSTOP IN
15 X_PELM IN
50 X_NSLM IN
16 X_ORG IN
51 X_NELM IN
17 X_TRIG OUT
52 X_EMGN IN A접점 O.C(pull-up)
18 Y_P24V IN External Power(24V)
53 Y_N24V IN External Power(24V GND)
19 Y_PULS- OUT 422-
54 Y_PULS+ OUT 422+
20 Y_DIR- OUT
55 Y_DIR+ OUT
21 Y_INPO IN
56 Y_SVON OUT
22 Y_ALMC OUT
57 Y_ALM IN
23 Y_CLR OUT
58 LGND Logic Ground
24 Y_ECA- IN O.C.(pull-up)
59 Y_ECA+ IN
25 Y_ECB- IN
60 Y_ECB+ IN
26 Y_ECZ- IN
61 Y_ECZ+ IN
27 Y_OUT2 OUT
62 Y_IN2 IN O.C.(pull-up)
28 Y_OUT3 OUT
63 Y_IN3 IN OC(pull-up)
65 Y_PSLM IN
31 Y_SSTOP IN
66 Y_PELM IN
32 Y_NSLM IN
67 Y_ORG IN
33 Y_NELM IN
68 Y_TRIG OUT A접점
34 Y_EMGN IN O.C(pull-up)