


DUAL OPT101 RECEIVER: RED -> A2 / IR -> A0

3.3 V only. C1/C2: non-polar ceramic 100 nF, X7R, 50 V.

Separate supply/return cables meet at the HAT. J3 has signals only: ADS must share HAT GND.

Crossings without dots are NOT connected. Pins 2, 6, 7 of OPT101 remain open.

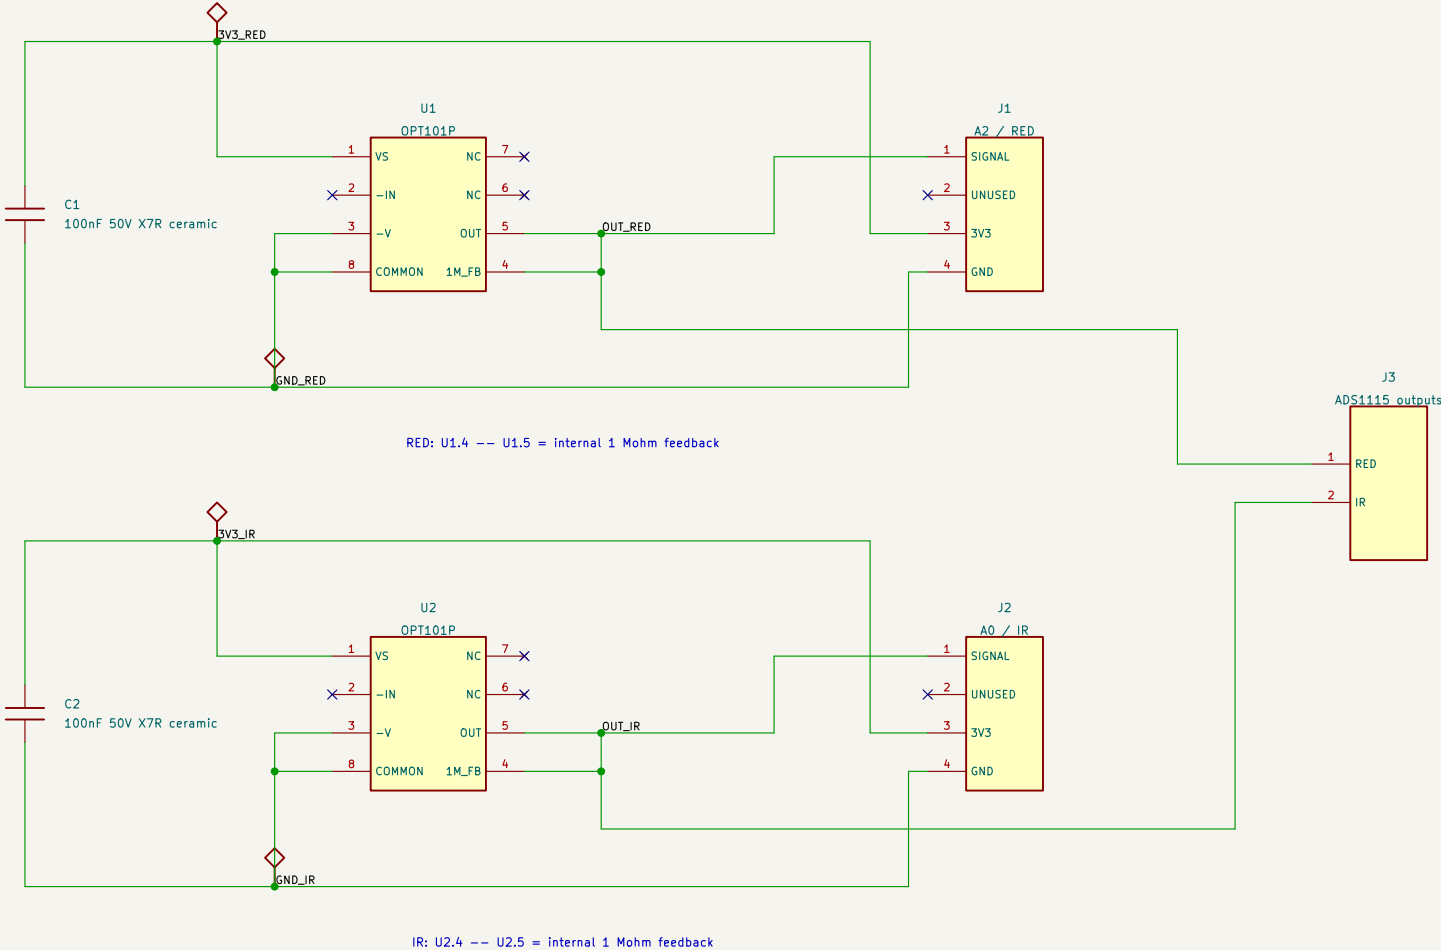

RED: U1.4 -- U1.5 = internal 1 Mohm feedback

IR: U2.4 -- U2.5 = internal 1 Mohm feedback

H1
M3 / 3.2mm NPTH

H2
M3 / 3.2mm NPTH

H3
M3 / 3.2mm NPTH

H4
M3 / 3.2mm NPTH

70 x 32 mm / DIP-8 sockets / Grove A0 IR, A2 RED

Sheet: /
File: opt101_receiver.kicad_sch

Title: PPG – Dual OPT101P receiver

Size: A4 Date: 2026-09-24

KiCad E.D.A. 10.0.6

Rev: 1.2

Id: 1/1