
U200 Series Digital Control & Regulated DC Power Supply

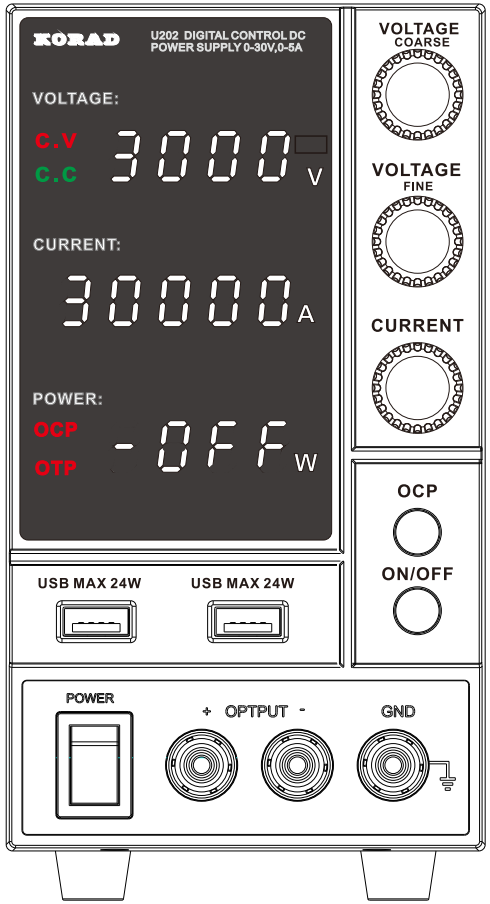

User Manual

DONGGUAN KORAD TECHNOLOGY CO., LTD.


Address: F9, Building D2, Kechuang Center, Songshan Lake Intelligent Valley,
No. 7 Yanhe North Road, Liaobu Town, Dongguan City, Guangdong Province.
Tel: +86-769-81111584 Fax: +86-769-81111804
E-mail: krissy@koradtechnology.com
www.koradtechnology.com
www.korad.com.cn

Specifications

Note: the following specifications are measured by preheating the machine for 3 minutes and the ambient temperature is 25℃±5℃.

Moldels	U202	U203	U205	U206	U210
Voltage	0-30V	0-30V	0-60V	0-60V	0-400V
Current	0-5A	0-10A	0-3A	0-5A	0-1A
Load Regulation					
Voltage Current	≤0.01%+2mV ≤0.1%+2mA	≤0.01%+2mV ≤0.1%+5mA	≤0.01%+2mV ≤0.1%+2mA	≤0.01%+2mV ≤0.1%+2mA	≤0.01%+2mV ≤0.1%+2mA
Line Regulation					
Voltage Current	≤0.01%+3mV ≤0.1%+3mA	≤0.01%+3mV ≤0.1%+3mA	≤0.01%+3mV ≤0.1%+3mA	≤0.01%+3mV ≤0.1%+3mA	≤0.01%+3mV ≤0.1%+3mA
Setup Resolution					
Voltage Current	10mV 1mA	10mV 1mA	10mV 1mA	10mV 1mA	10mV 1mA
Setup Accuracy(25℃+-5℃)					
Voltage Current	≤0.5%+10mV ≤0.5%+5mA	≤0.5%+10mV ≤0.5%+5mA	≤0.5%+10mV ≤0.5%+5mA	≤0.5%+10mV ≤0.5%+10mA	≤0.5%+10mV ≤0.5%+5mA
Ripple(20-20M)					
Voltage Current	≤20mVrms ≤10mArms	≤20mVrms ≤10mArms	≤20mVrms ≤10mArms	≤20mVrms ≤20mArms	≤30mVrms ≤10mArms
Temp. Coefficient					
Voltage Current	≤150ppm ≤150ppm	≤150ppm ≤150ppm	≤150ppm ≤150ppm	≤150ppm ≤150ppm	≤150ppm ≤150ppm
Read Back Accuracy					
Voltage Current	10mV 1mA	10mV 1mA	10mV 1mA	10mV 1mA	10mV 1mA
Read Back Temp. Coefficient					
Voltage Current	≤150ppm ≤150ppm	≤150ppm ≤150ppm	≤150ppm ≤150ppm	≤150ppm ≤150ppm	≤150ppm ≤150ppm
Weight and Dimension					
U202, U203, U205, U206 & U210: 95mm(W)*168(H)*231mm(D)					
U202: 1.9kgs, U203: 2.5kgs, U205: 2kgs, U206: 2.5kgs & U210: 2.5kgs					

Overall Dimension

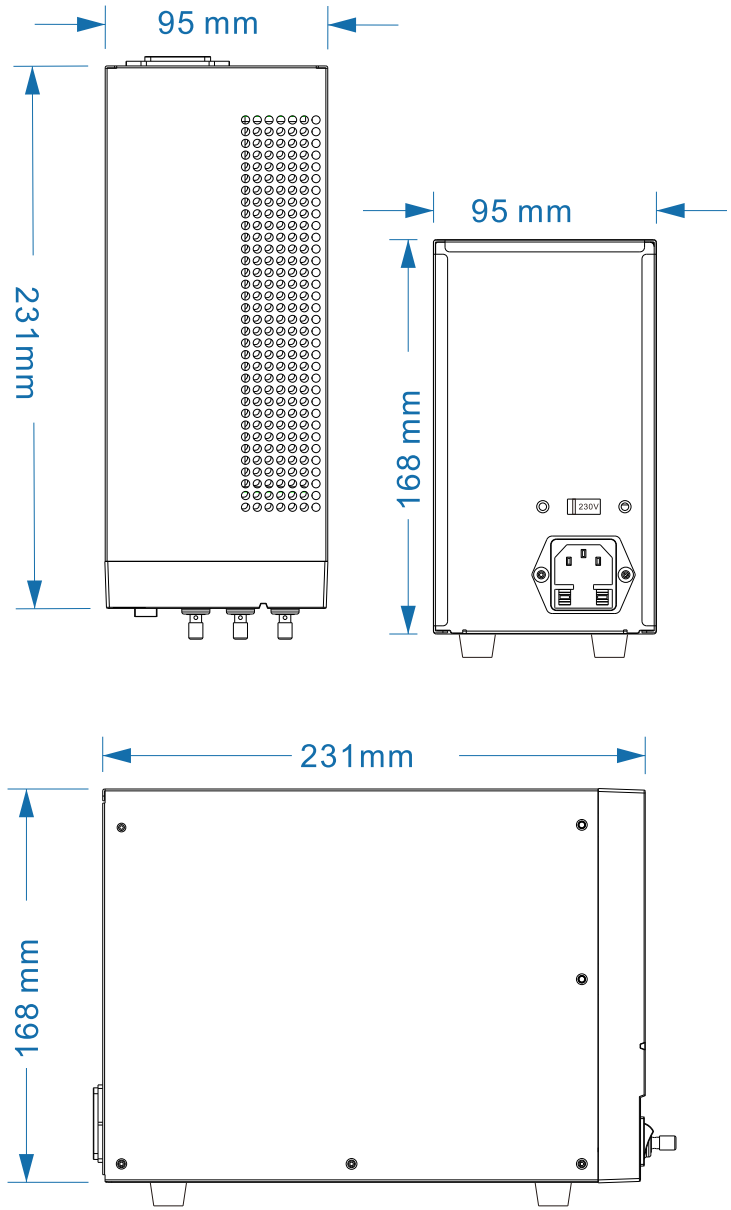


Introduction

With compact size, light weight, and no fan noise (there is no fan for 150W and below models), U200 series power supplies' min testing current value is 0.1mA, and they have over-current and over-temperature protection functions. Besides, they can control the output through the output switch, and there are shutdown memory function, which is quite suitable for the maintenance of communication and electronic equipment, and the application on electronic experiments, electronic handworks, and factories, etc..


Features:

- High-precision voltage and current display
- Power display
- 0.1mA current display function
- Over-current & over-temperature protection
- Dual fast charging USB port, and max single port is 24W
- Output switch control
- Shutdown memory of the setting values
- Digital-potentiometer & quick-adjustment knob, which can adjust the output quickly and stably


Description of the Operation Panel

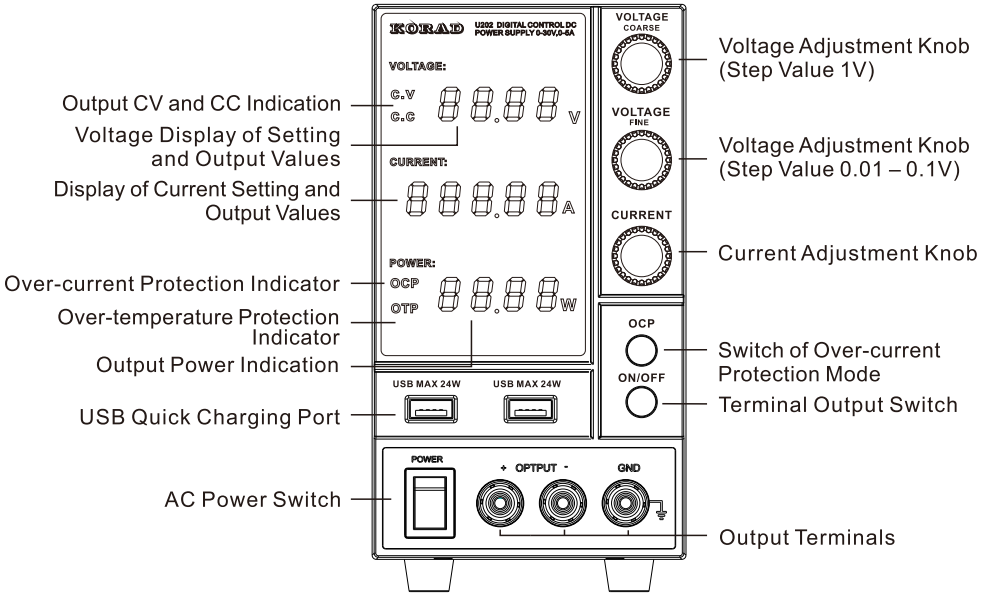

Description of Rear Panel

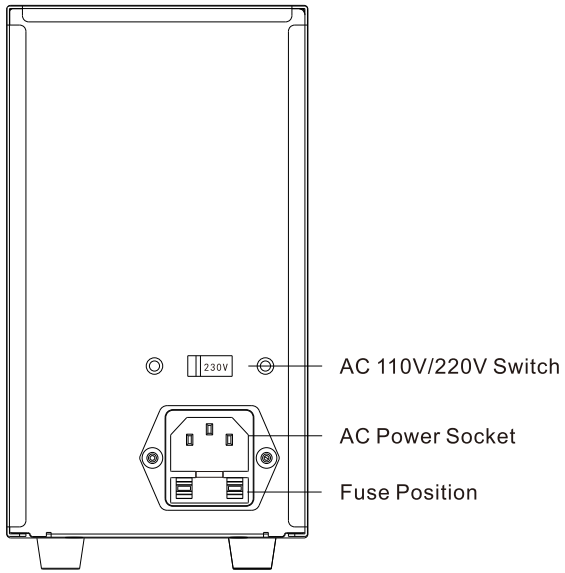

Voltage Setting



Rotate this knob to do coarse adjustment of voltage, and the step adjustment value is 1V.

Rotate this knob to do fine adjustment of voltage, and the step adjustment value is 0.1V or 0.01V. By pressing this button, you can select the adjustment value.

Current Setting



Rotate this current adjustment knob to adjust the current value, and press this button to select the adjustment value.

Over-current Protection Function



Press this key to enable the over-current protection function, and then OCP indicator lights ON.

Output Switch Control



Press the key ON/OFF and the output will be turned ON or OFF. When the output is turned OFF, the power display will display -OFF.