

Robot Operating System (ROS)

MATTHEW LAWSON¹

¹School of Informatics and Computing, Bloomington, IN 47408, U.S.A.

* Corresponding authors: laszewski@gmail.com

paper2, March 29, 2017

The Open Source Robotics Foundation (OSRF) oversees the maintenance and development of the Robot Operating System (ROS). ROS provides an open-source, extensible framework upon which roboticists can build simple or highly complex operating programs for robots. Features to highlight include: a) ROS' well-developed, standardized intra-robot communication system; b) its sufficiently-large set of programming tools; c) its C++ and Python APIs; and, d) its extensive library of third-party packages to address a large proportion of roboticists software needs. The OSRF distributes ROS under the BSD-3 license.

© 2017 <https://creativecommons.org/licenses/>. The authors verify that the text is not plagiarized.

Keywords: Cloud, I524, robot, ros, ROS

<https://github.com/cloudmesh/sp17-i524/raw/master/paper2/S17-IO-3010/report.pdf>

This review document is provided for you to achieve your best. We have listed a number of obvious opportunities for improvement. When improving it, please keep this copy untouched and instead focus on improving report.tex. The review does not include all possible improvement suggestions and if you see a comment you may want to check if this comment applies elsewhere in the document.

1. INTRODUCTION

The Open Source Robotics Foundation's middleware product *Robot Operating System*, or ROS, provides a framework for writing operating systems for robots. ROS offers "a collection of tools, libraries, and conventions [meant to] simplify the task of creating complex and robust robot behavior across a wide variety of robotic platforms" [2]. The Open Source Robotics Foundation, hereinafter OSRF or the Foundation, attempts to meet the aforementioned objective by implementing ROS as a modular system. That is, ROS offers a core set of features, such as inter-process communication, that work with or without pre-existing, self-contained components for other tasks.

2. ARCHITECTURE

why not using a 3-level structure? let "communication" and "tool" etc. have their own subsections?

The OSRF designed ROS as a distributed, modular system. The OSRF maintains a subset of essential features for ROS, i.e., the core functions upon which higher-level packages build, to provide an extensible platform for other roboticists. The Foundation also coordinates the maintenance and distribution of a vast array of ROS add-ons, referred to as modules. Figure 1

illustrates the ROS universe in three parts: a) the plumbing, ROS' communications infrastructure; b) the tools, such as ROS' visualization capabilities or its hardware drivers; and c) ROS' ecosystem, which represents ROS' core developers and maintainers, its contributors and its user base.

The modules or packages, which are analogous to packages in Linux repositories or libraries in other software distributions such as *R*, provide solutions for numerous robot-related challenges. General categories include a) drivers, such as sensor and actuator interfaces; b) platforms, for steering and image processing, etc.; c) algorithms, for task planning and obstacle avoidance; and, d) user interfaces, such as tele-operation and sensor data display. [3]

2.1. Communications Infrastructure – General

OSRF maintains three distinct communication methods for ROS: a) *message passing*; b) *services*; and, c) *actions*. Each method utilizes ROS' standard communication type, the *message* [4]. Messages, in turn, adhere to ROS' *interface description language*, or IDL. The IDL dictates that messages should be in the form of a data structure comprised of typed fields [5]. Finally, *.msg* files store the structure of messages published by various nodes so that ROS' internal systems can generate source code automatically.

2.2. Communications Infrastructure – Message Passing

ROS implements a publish-subscribe anonymous message passing system for inter-process communication, hereinafter pubsub, as its most-basic solution for roboticists. A pubsub system consists of two complementary pieces: a) a device, node or process, hereinafter node, publishing messages, i.e., information, to a *topic*; and b) another node *listening to* and ingesting the informa-

the rest of the robot presents a significant challenge in robotics [4].

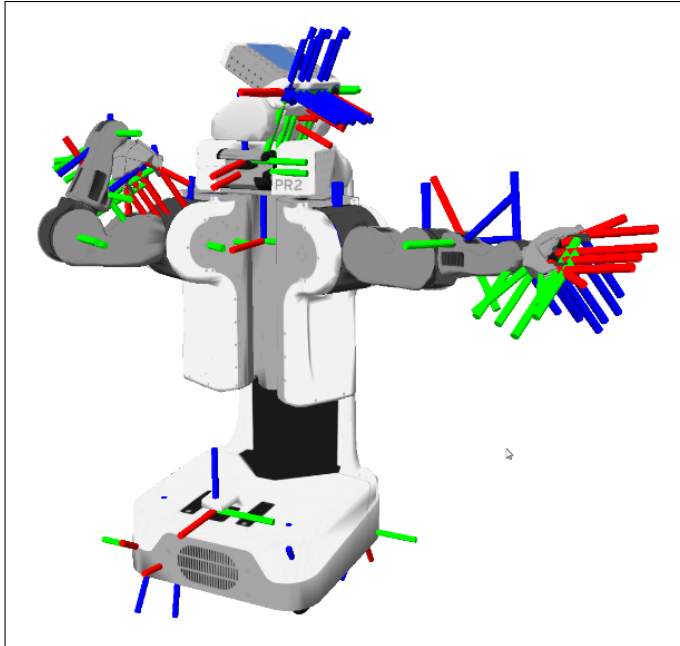


Fig. 2. A Simulated Robot with Many Coordinate Frames [8]

ROS addresses this issue with its *transform* library. The *tf* library tracks components of a robot using three-dimensional coordinate frames [8]. It records the relationship between coordinate frame positional values at sequential points in time in a tree structure. *tf*'s built-in functions allow the roboticist to transform a particular coordinate frame's values to same basis as a different coordinate frame's values. As a result, the user, or the user's program, can always calculate any coordinate frame's relative position to any or all of the other coordinate frame positions at any point in time. Although the first-generation library, *tf*, has been deprecated in favor of the second-generation one, *tf2*, the Foundation and ROS users still refer to the library as *tf*.

not clear about your structure here: you list geometry, sensor, navigation etc. as categories been standardized, but why only illustrate geometry? followings subsections are of different aspects.

2.7. Tools – Robot Description Language

ROS describes robots in a machine-readable format using its *Unified Robot Description Format*, or URDF [4]. The file delineates the physical properties of the robot in XML format. URDF files enable use of the *tf* library, useful visualizations of the robot and the use of the robot in simulations.

2.8. Tools – Diagnostics

ROS' diagnostics meta-package, i.e., a package of related packages, "contains tools for collecting, publishing, analyzing and viewing diagnostics data [9]." ROS' diagnostics take advantage of the aforementioned message system to allow nodes to publish diagnostic information to the standard diagnostic topic. The nodes use the *diagnostic_updater* and *self_test* packages to publish diagnostic information, while users can access the information using the *rqt_robot_monitor* package. ROS does not require

nodes to include certain information in their respective publications, but diagnostic publications generally provide some standard, basic information. That information may include serial numbers, software versions, unique incident IDs, etc.

2.9. Tools – Command Line Interfaces (CLI)

ROS provides at least 45 command line tools to the roboticist [10]. Therefore, ROS can be setup and run entirely from the command line. However, the GUI interfaces remain more popular among the user-base. Examples of ROS CLI tools include: a) *rosmmsg*, which allows the user to examine messages, including the data structure of .msg files [5]; b) *rosbag*, a tool to perform various operations on .bag files, i.e., saved node publications; and, c) *rosbash*, which extends bash, a Linux shell program, with ROS-related commands.

Latex has pretty command line style. feel free to use it.

2.10. Tools – Graphical User Interfaces (GUI)

OSRF includes two commonly-used GUIs, *rviz* and *rqt* [4], in the core ROS distribution. *rviz* creates 3D visualizations of the robot, as well as the sensors and sensor data specified by the user. This component renders the robot in 3D based on a user-supplied URDF document. If the end-user wants or needs a different GUI, s/he can use *rqt*, a Qt-based GUI development framework. It offers plug-ins for items such as: a) viewing layouts, like tabbed or split-screens; b) network graphing capabilities to visualize the robot's nodes; c) charting capabilities for numeric values; d) data logging displays; and, e) topic (communication) monitoring.

2.11. Ecosystem

ROS benefits from a wide-ranging network of interested parties, including core developers, package contributors, hobbyists, researchers and for-profit ventures. Although quantifiable use metrics for ROS remain scarce, ROS does have more than 3,000 software packages available from its community of users [11], ranging from proof-of-concept algorithms to industrial-quality software drivers. Corporate users include large organizations such as Bosch (Robert Bosch GmbH) and BMW AG, as well as smaller companies such as ClearPath Robotics, Inc. and Stanley Innovation. University users include the Georgia Institute of Technology and the University of Arizona, among others [12].

3. API

ROS supports robust application program interfaces, APIs, through libraries for C++ and Python. It provides more-limited, and experimental, support for nodejs, Haskell and Mono / .NET programming languages, among others. The latter library opens up use with C# and Iron Python [13].

4. LICENSING

The OSRF distributes the core of ROS under the standard, three-clause BSD license, hereinafter BSD-3 license. The BSD-3 license belongs to a broader class of copyright licenses referred to as *permissive licenses* because it imposes zero restrictions on the software's redistribution as long as the redistribution maintains the license's copyright notices and warranty disclaimers [14].

Other names for BSD-3 include: a) BSD-new; b) New BSD; c) revised BSD; d) The BSD License, the official name used by the Open Source Initiative; and, e) Modified BSD License, used by the Free Software Foundation.

Although the OSRF distributes the main ROS elements under the BSD-3 license, it does not require package contributors or end-users to adopt the same license. As a result, full-fledged ROS programs may include other types of *Free and Open-Source Software* [15], or FOSS, licenses. In addition, programs may depend on proprietary or unpublished drivers unavailable to the broader community.

5. USE CASES

ROS' end-markets, its use cases, include manipulator robots, i.e., robotic arms with grasping units; mobile robots, such as autonomous, mobile platforms; autonomous cars; social robots; humanoid robots, unmanned / autonomous vehicles; and an assortment of other robots [12].

5.1. Use Cases for Big Data

Fetch Robotics, Inc. offers its *Automated Data Collection Platform* robot to the market so corporations can "[g]ather environmental data more frequently and more accurately for [its] Internet of Things...and Big Data Applications. [16]" Fetch's system automatically collects data, such as RFID tracking (inventory management) or in-store shelf surveys. The latter service began in January 2017 when Fetch partnered with Trax Image Recognition, which makes image recognition software [17].

6. EDUCATIONAL MATERIAL

Those interested in learning more about OSRF's ROS should visit ROS' homepage, www.ros.org or its wiki page, wiki.ros.org. In addition, ClearPath Robotics maintains a useful set of tutorials at <https://goo.gl/hRmM3k>. Finally, several books dedicated to programming with ROS, such as *Programming Robots with ROS: A Practical Introduction to the Robot Operating System* by Quibley, Gerkey and Smart can be purchased at retail.

I suggest to remove section Educational material, instead, extend Big Data use cases. The former one deluted the tech flavor of the paper and even though it is nice written paper, it needs to tight itself a bit more toward data science, which is the main topic of the class.

7. CONCLUSION

ROS offers a number of attractive features to its users, including a well-developed and standardized intra-robot communication system, modular design, vetted third-party additions and legitimacy via real-world applications. Although its status as open source software precludes direct support from its parent organization, OSRF, for-profit organizations and the software's active community of users provide reassurances to any robotist worried about encountering a seemingly-insurmountable problem.

8. ACKNOWLEDGMENT

I would like to thank my employer, Indiana Farm Bureau, for its support of my continuing education.

REFERENCES

- [1] H. Boyer, "Open Source Robotics Foundation And The Robotics Fast Track," web page, nov 2015, accessed 19-mar-2017. [Online]. Available: <https://www.osrfoundation.org/wordpress/wp-content/uploads/2015/11/rft-boyer.pdf>
- [2] Open Source Robotics Foundation, "About ROS," Web page, mar 2017, accessed 16-mar-2017. [Online]. Available: <http://www.ros.org/about-ros/>
- [3] National Instruments, "A Layered Approach to Designing Robot Software," Web page, mar 2017, accessed 18-mar-2017. [Online]. Available: <http://www.ni.com/white-paper/13929/en/>
- [4] Open Source Robotics Foundation, "Why ROS?: Features: Core components," Web page, mar 2017, accessed 17-mar-2017. [Online]. Available: <http://www.ros.org/core-components/>
- [5] —, "ROS graph concepts: Messages," Web page, aug 2016, accessed 18-mar-2017. [Online]. Available: <http://wiki.ros.org/Messages>
- [6] —, "Services," web page, feb 2012, accessed 18-mar-2017. [Online]. Available: <http://wiki.ros.org/Services>
- [7] —, "actionlib: Package summary," Web page, feb 2017, accessed 18-mar-2017. [Online]. Available: <http://wiki.ros.org/actionlib>
- [8] —, "tf2: Package summary," Web page, mar 2016, accessed 18-mar-2017. [Online]. Available: <http://wiki.ros.org/tf2>
- [9] —, "diagnostics: Package Summary," Web page, aug 2015, accessed 19-mar-2017. [Online]. Available: <http://wiki.ros.org/diagnostics>
- [10] —, "ROS command-line Tools," Web page, aug 2015, accessed 19-mar-2017. [Online]. Available: <http://wiki.ros.org/ROS/CommandLineTools>
- [11] —, "Why ROS?: Is ROS for me?" Web page, mar 2017, accessed 16-mar-2017. [Online]. Available: www.ros.org/is-ros-for-me/
- [12] —, "Robots Using ROS," Web page, mar 2017, accessed 19-mar-2017. [Online]. Available: <http://wiki.ros.org/Robots>
- [13] Open Source Research Foundation, "APIs," Web page, mar 2016, accessed 19-mar-2017. [Online]. Available: <http://wiki.ros.org/APIs>
- [14] Wikipedia, "BSD licenses — Wikipedia, the free encyclopedia," Web page, mar 2017, accessed 16-mar-2017. [Online]. Available: https://en.wikipedia.org/wiki/BSD_licenses
- [15] —, "Free and open-source software — Wikipedia, the free encyclopedia," Web page, mar 2017, accessed 18-mar-2017. [Online]. Available: https://en.wikipedia.org/wiki/Free_and_open-source_software
- [16] Fetch Robotics, Inc., "Automated Data Collection Platform," Web page, mar 2017, accessed 19-mar-2017. [Online]. Available: <http://fetchrobotics.com/automated-data-collection-platform/>
- [17] Retail Touch Points, "Trax and Fetch Robotics Unite for Better Retail," Web page, jan 2017, accessed 19-jan-2017. [Online]. Available: <http://www.retailtouchpoints.com/features/news-briefs/trax-and-fetch-robotics-unite-for-better-retail-insights>

AUTHOR BIOGRAPHIES

Matthew Lawson received his BSBA, Finance in 1999 from the University of Tennessee, Knoxville. His research interests include data analysis, visualization and behavioral finance.

A. WORK BREAKDOWN

The work on this project was distributed as follows between the authors:

Matthew Lawson. Matthew researched and wrote all of the material for this paper.