CONCURRENT 3280 EXHIBIT KIOSK

REV 1 · STANDALONE ENCLOSURE · MANUFACTURING PACKAGE

DRAWING INDEX

GENERAL NOTES

1. ALL DIMENSIONS IN INCHES UNLESS NOTED. THIRD ANGLE PROJECTION.
2. DATUM –A– IS THE FRONT FACE OF P1. DATUM –B– IS THE TOP EDGE OF P1.
3. CRITICAL: BUTTON CENTRELINE 25.440 BELOW DATUM –B–. WITH THE KIOSK BOTTOM AT 34.750 AFF THIS PLACES THE CONTROLS AT 38.000 AFF, INSIDE THE ADA 2010 §308 REACH RANGE OF 15.000 TO 48.000. DO NOT CHANGE WITHOUT RE–DERIVING.
4. P1 IS CNC ROUTED FROM 3 mm ACM. IT CANNOT BE BENT, TAPPED, COUNTERSUNK OR POWDER COATED. ALL FIXING IS THROUGH CLEARANCE HOLES INTO ITEM 11.
5. NEVER DRIVE A SCREW INTO A PLYWOOD EDGE. USE ITEM 11 THROUGHOUT.
6. MONITOR IS ALIGNED TO THE P1 WINDOW, NOT THE REVERSE. THE WINDOW IS 0.250 OVERSIZE PER SIDE ON THE NOMINAL 23.8" ACTIVE AREA AND CLEARS EVERY PANEL SOLD AS "24 INCH" (23.6 TO 24.0 DIAGONAL). SHIM P9 IN DEPTH TO SUIT.
7. P1 FIXINGS (ITEM 12) ARE VISIBLE ON THE FRONT FACE. BLACK HEAD ON A BLACK PANEL, TREATED AS AN INSTRUMENT–PANEL DETAIL. PIN–TORX SPECIFIED SO THEY CANNOT BE CASUALLY REMOVED BY THE PUBLIC. ALTERNATE: BOND P1 WITH VHB STRUCTURAL TAPE AND OMIT ITEMS 11/12 AT THE PERIMETER — NOT REVERSIBLE.
8. ⌀1.2008 (30.5 mm) BUTTON CUTOUT IS NOMINAL FOR A 30 mm ANTI–VANDAL SWITCH. VERIFY AGAINST THE DATASHEET OF THE SWITCH ACTUALLY PURCHASED BEFORE RELEASING SHEET 200. CONFIRM PANEL RANGE INCLUDES 3 mm AND ACTUATION FORCE ≤ 5 lbf PER ADA §309.4.
9. NO TEXT IS CUT INTO P1. BACK / HOME / NEXT LEGENDS ARE APPLIED VINYL, APPLIED AFTER ASSEMBLY. SEE SHEET 600.
10. THE KIOSK MOUNTS TO THE CLOSED FACTORY DOOR OF THE CONCURRENT 3280. THE MOUNTING ADAPTER IS A SEPARATE SUBSYSTEM, NOT IN THIS PACKAGE. TOTAL PROJECTION FROM THE DOOR FACE TO REMAIN ≤ 4.000 PER ADA §307.2, LEAVING 0.750 FOR THE ADAPTER. NO FASTENER MAY ENTER THE HISTORIC CABINET.

CONCEPT PACKAGE — NOT RELEASED FOR PRODUCTION

The Concurrent 3280 is a museum artifact. All mounting must be reversible, non–destructive and removable. Nothing in this package fastens to the machine.

UNLESS OTHERWISE SPECIFIED
DECIMAL .XX ± .03 .XXX ± .010
CUT PARTS PER SUPPLIER TOLERANCE
BREAK SHARP EDGES · DEBURR ALL HOLES

· INFOAGE

COVER AND NOTES	DWG NO 000	REV A
CONCEPT — NOT RELEASED FOR PRODUCTION	SCALE NONE	SHEET 1 OF 12
DRAWN CLAUDE / N. DEMARCO	MATERIAL SEE BOM	FINISH SEE NOTES
DATE 2026–08–28	UNITS INCHES	PROJECTION THIRD ANGLE

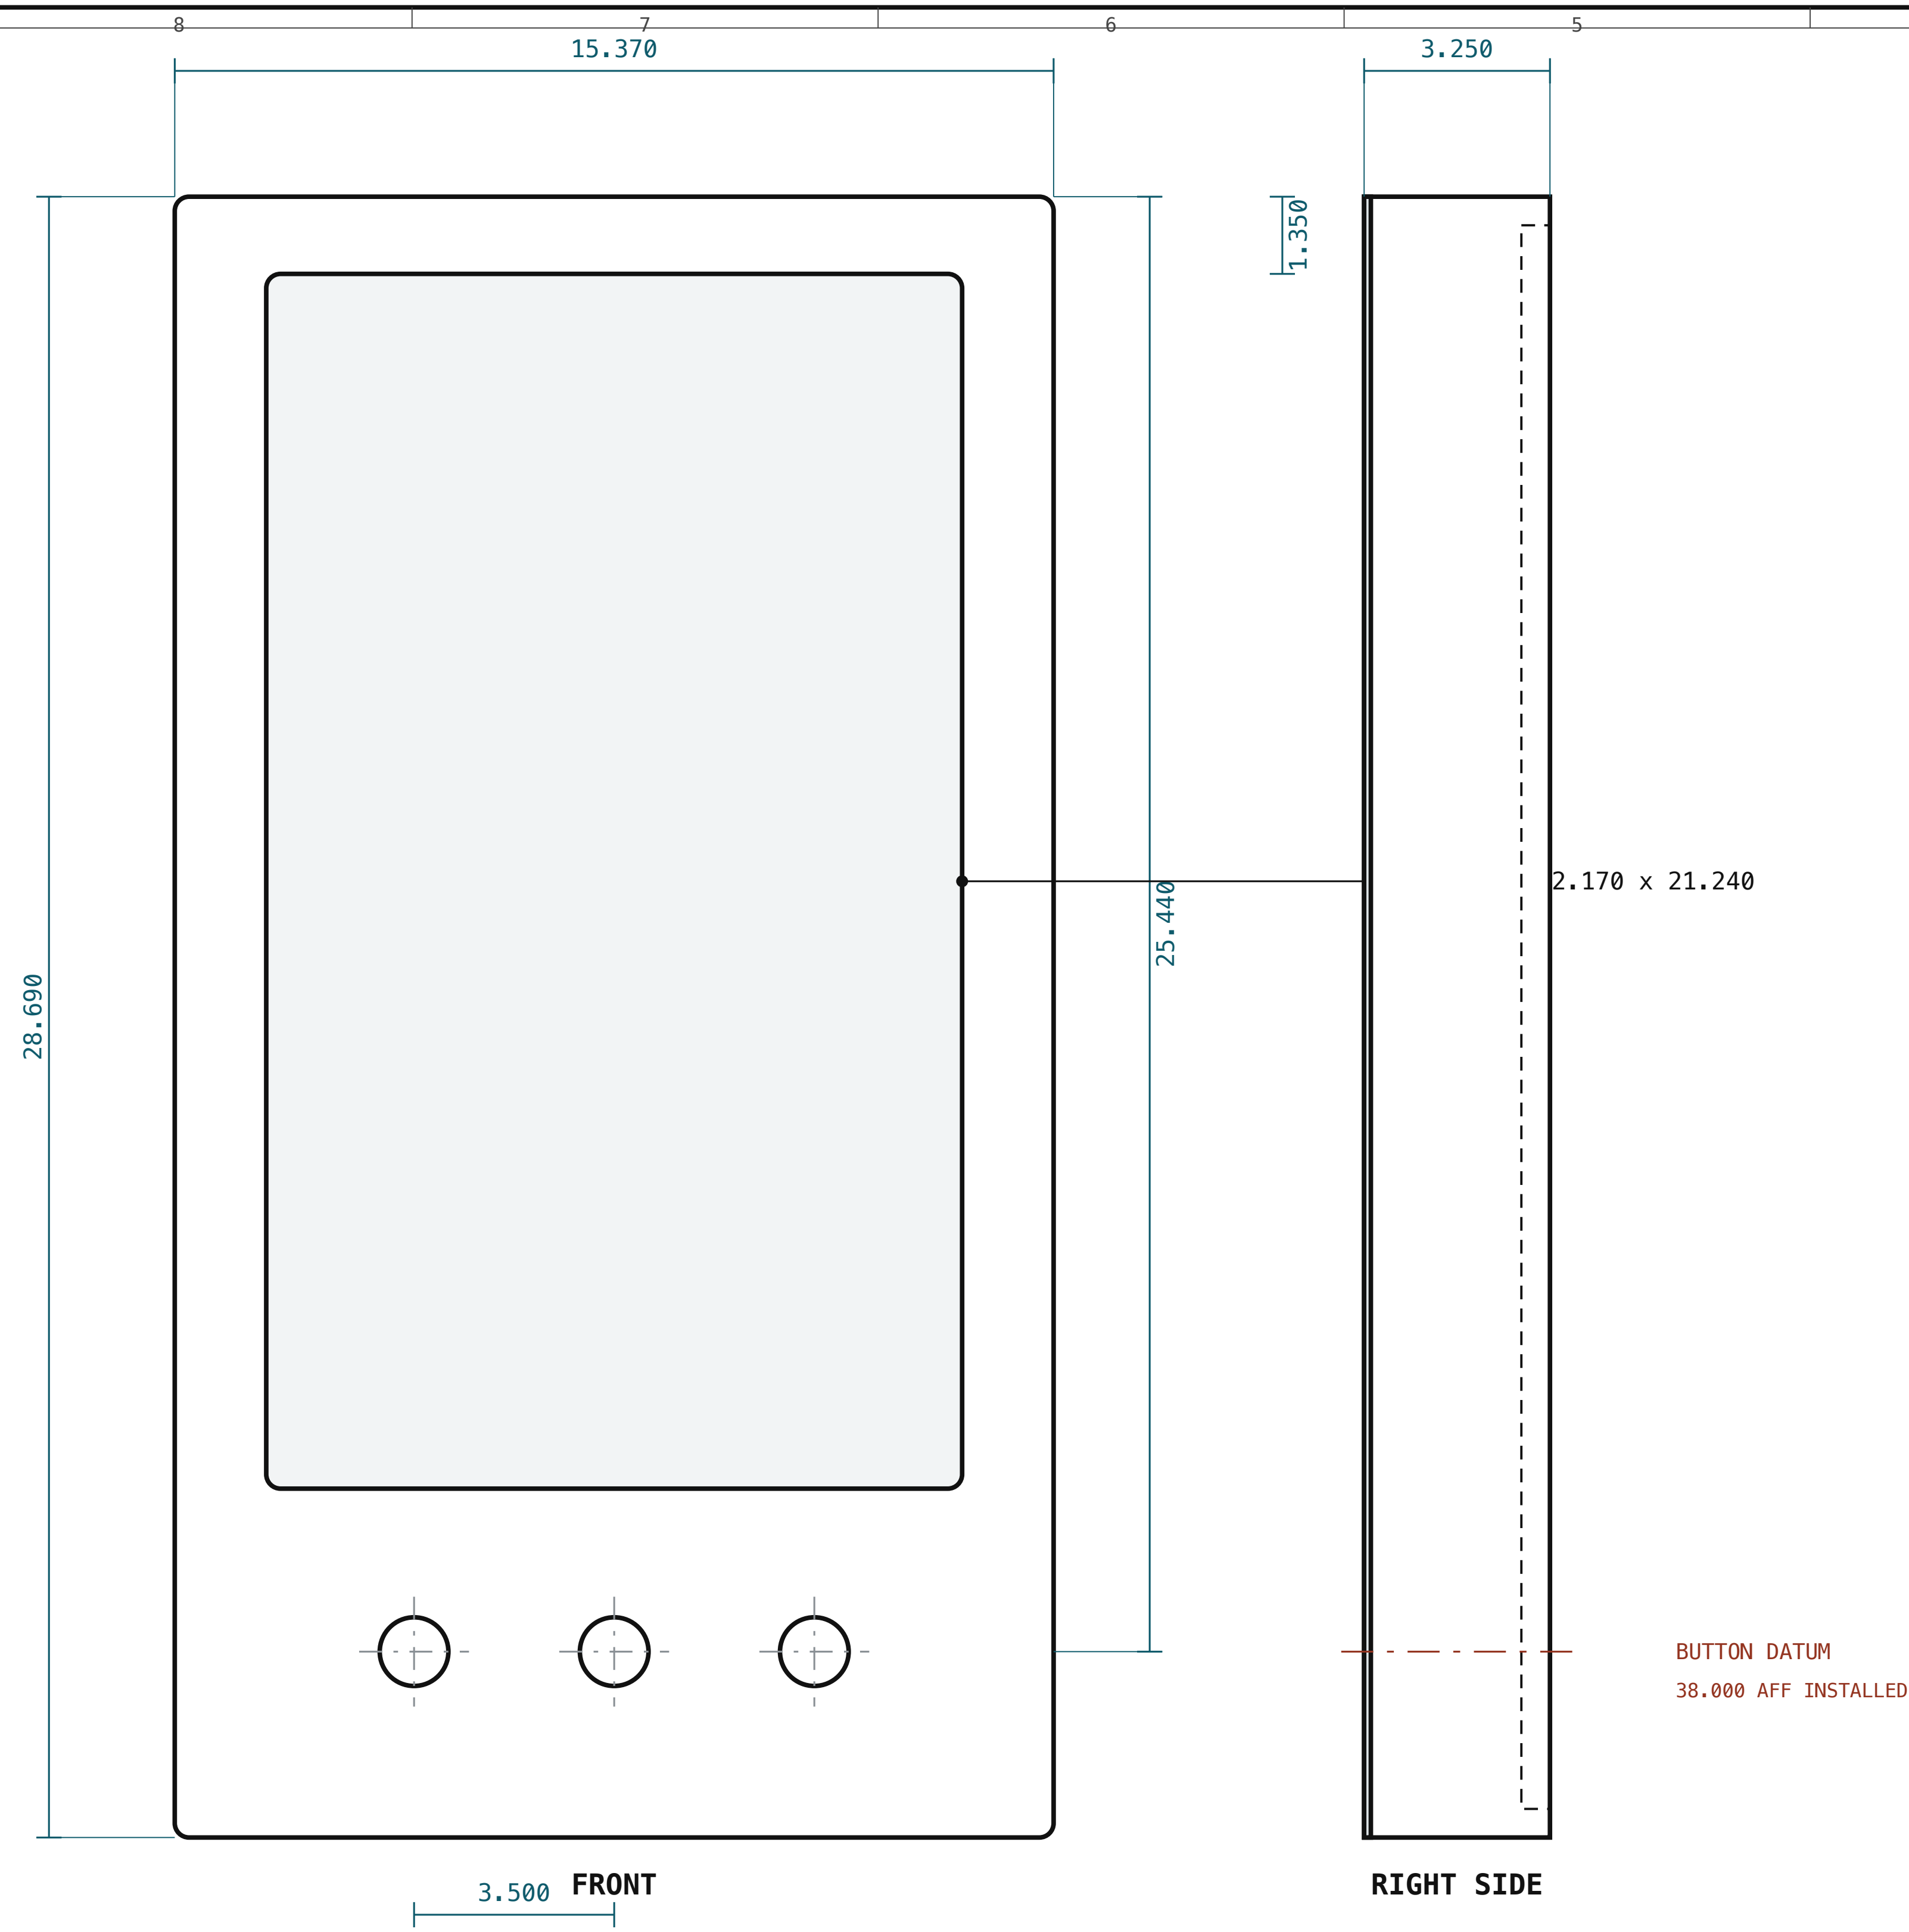

UNLESS OTHERWISE SPECIFIED
DECIMAL .XX ± .03 .XXX ± .010
CUT PARTS PER SUPPLIER TOLERANCE
BREAK SHARP EDGES · DEBURR ALL HOLES

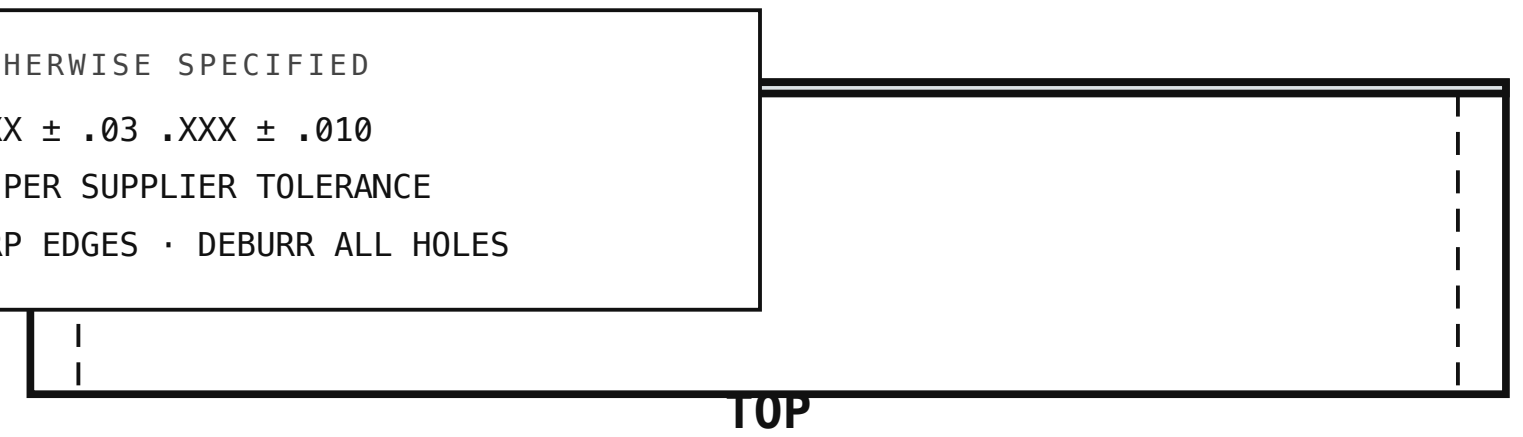

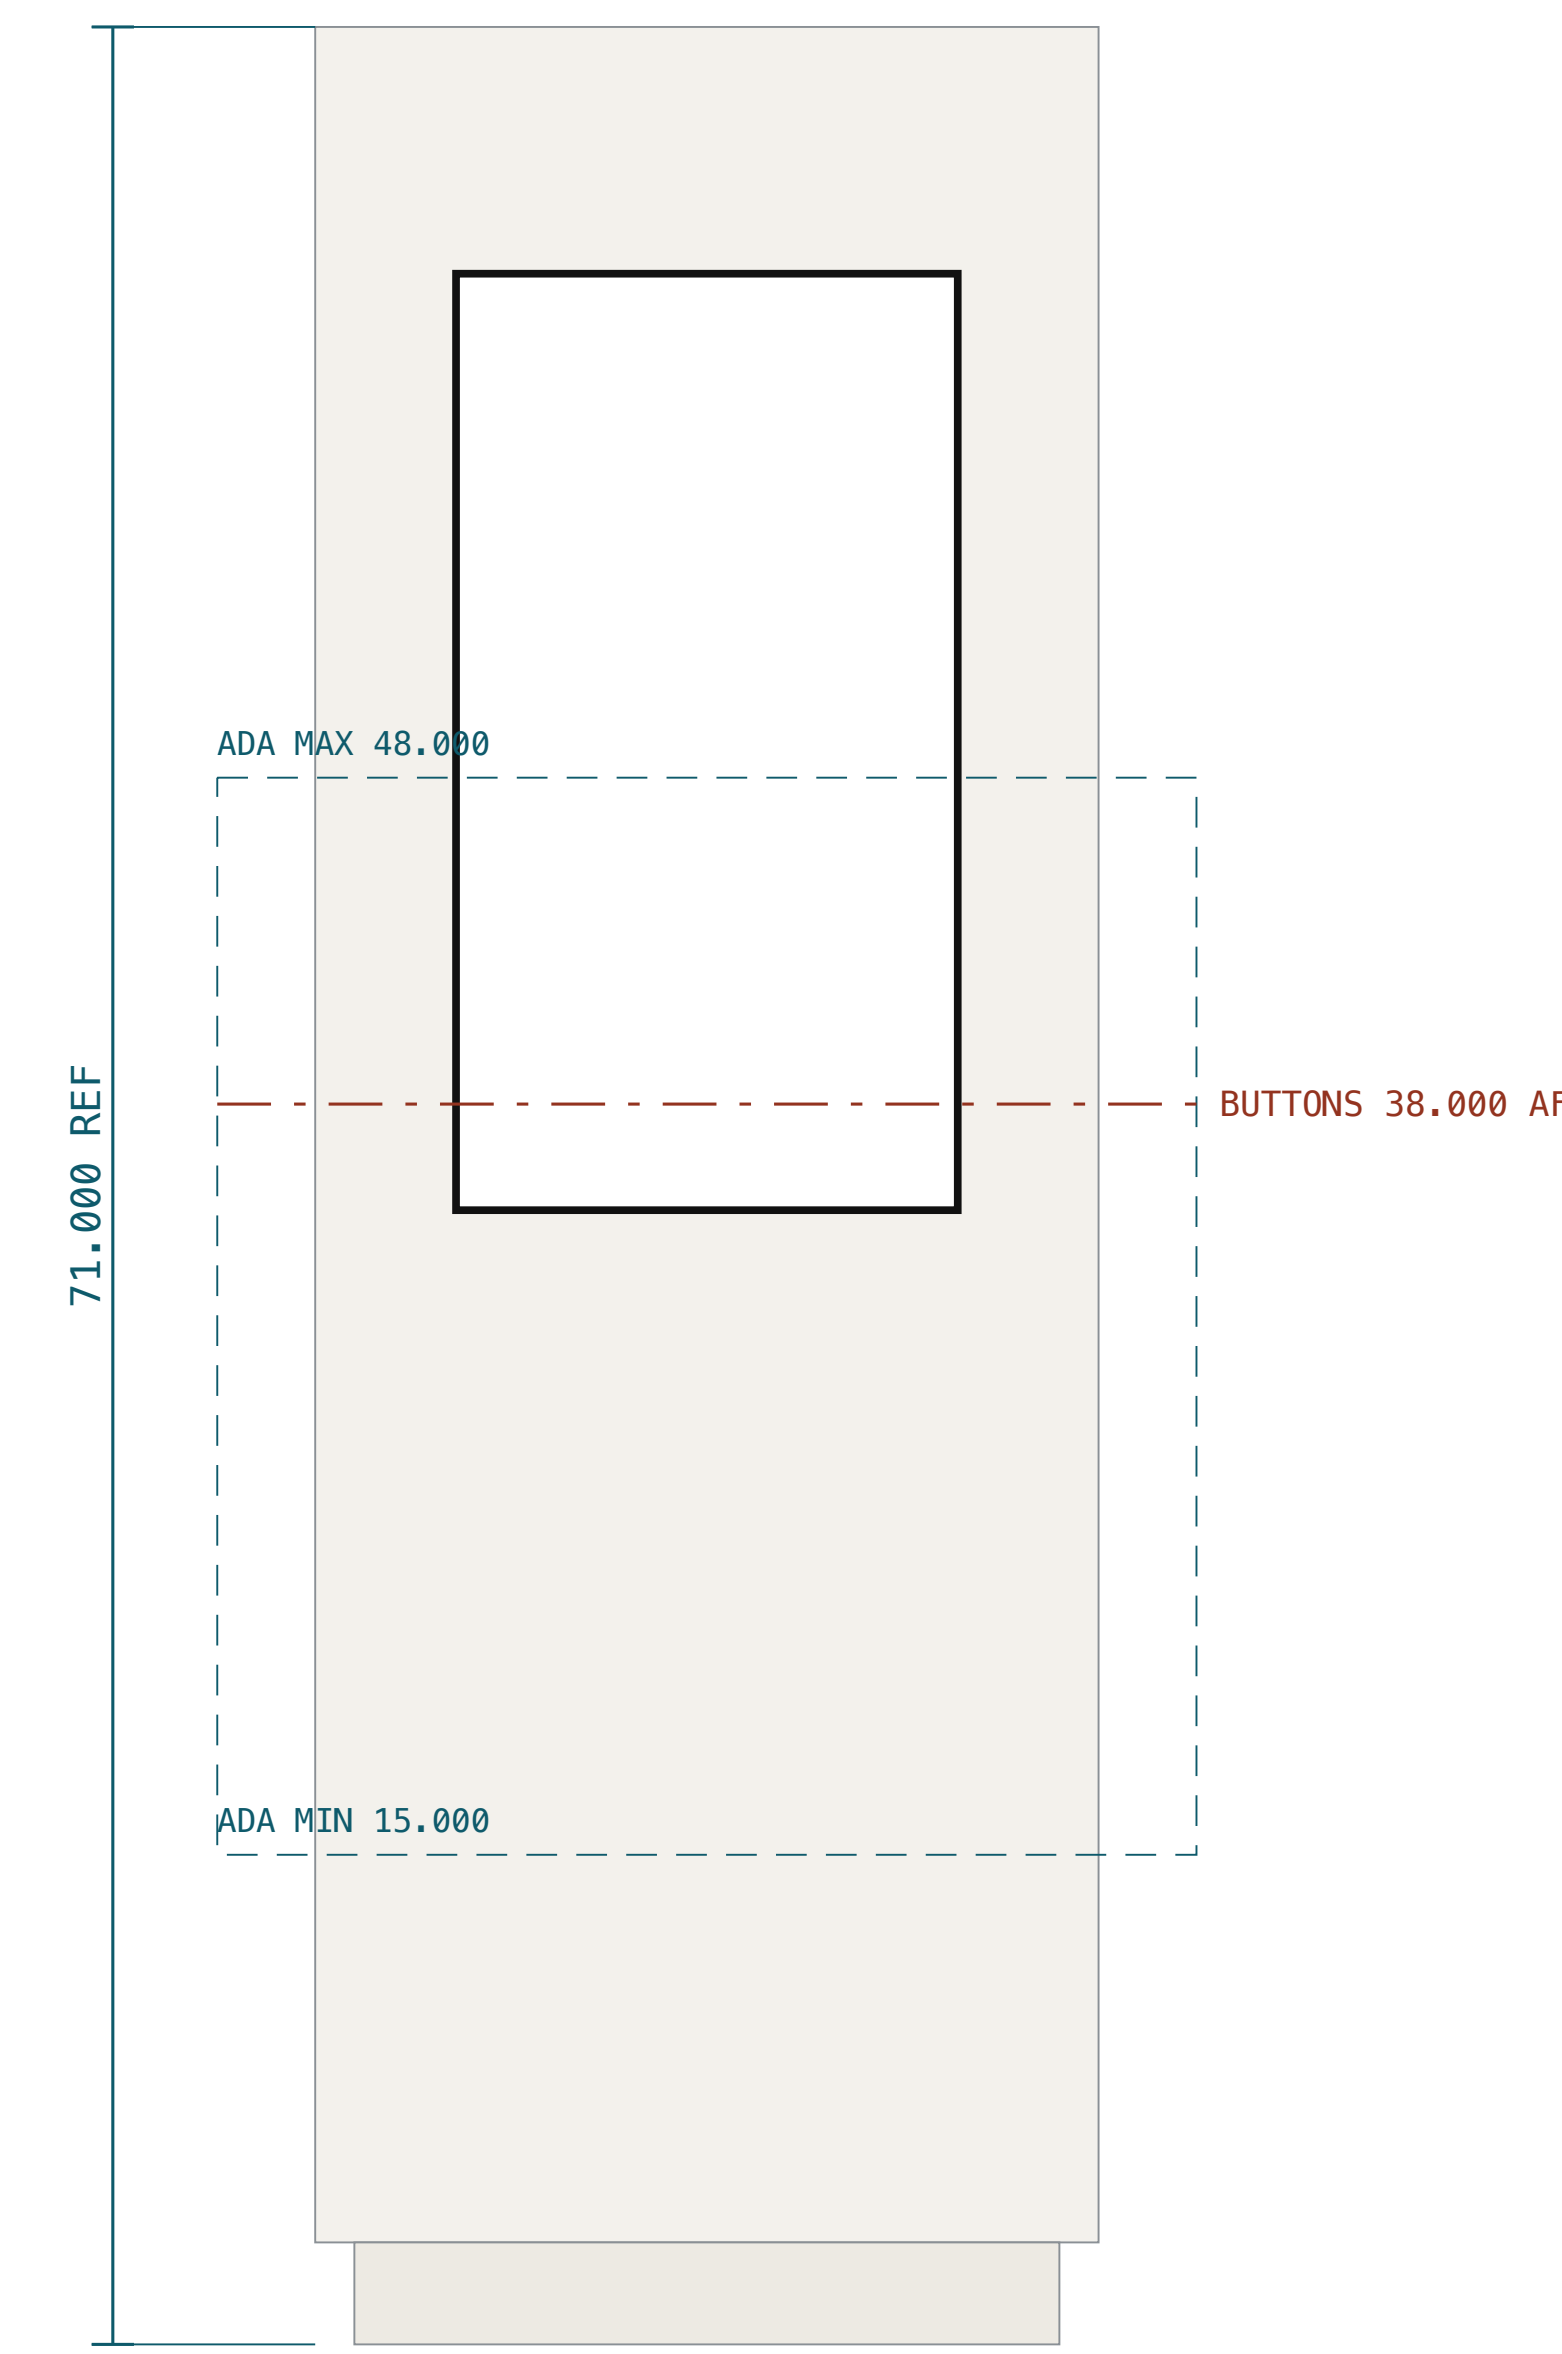

INSTALLED CONTEXT — REFERENCE ONLY

3280 KIOSK · REV 1 STANDALONE CONCURRENT 3280, DOOR CLOSED — VINTAGE COMPUTER FEDERATION · INFOAGE

GENERAL ARRANGEMENT	DWG NO 100	REV A
CONCEPT — NOT RELEASED FOR PRODUCTION	SCALE 1:4	SHEET 2 OF 12
DRAWN CLAUDE / N. DEMARCO	MATERIAL ASSEMBLY	FINISH —
DATE 2026-08-28	UNITS INCHES	PROJECTION THIRD ANGLE

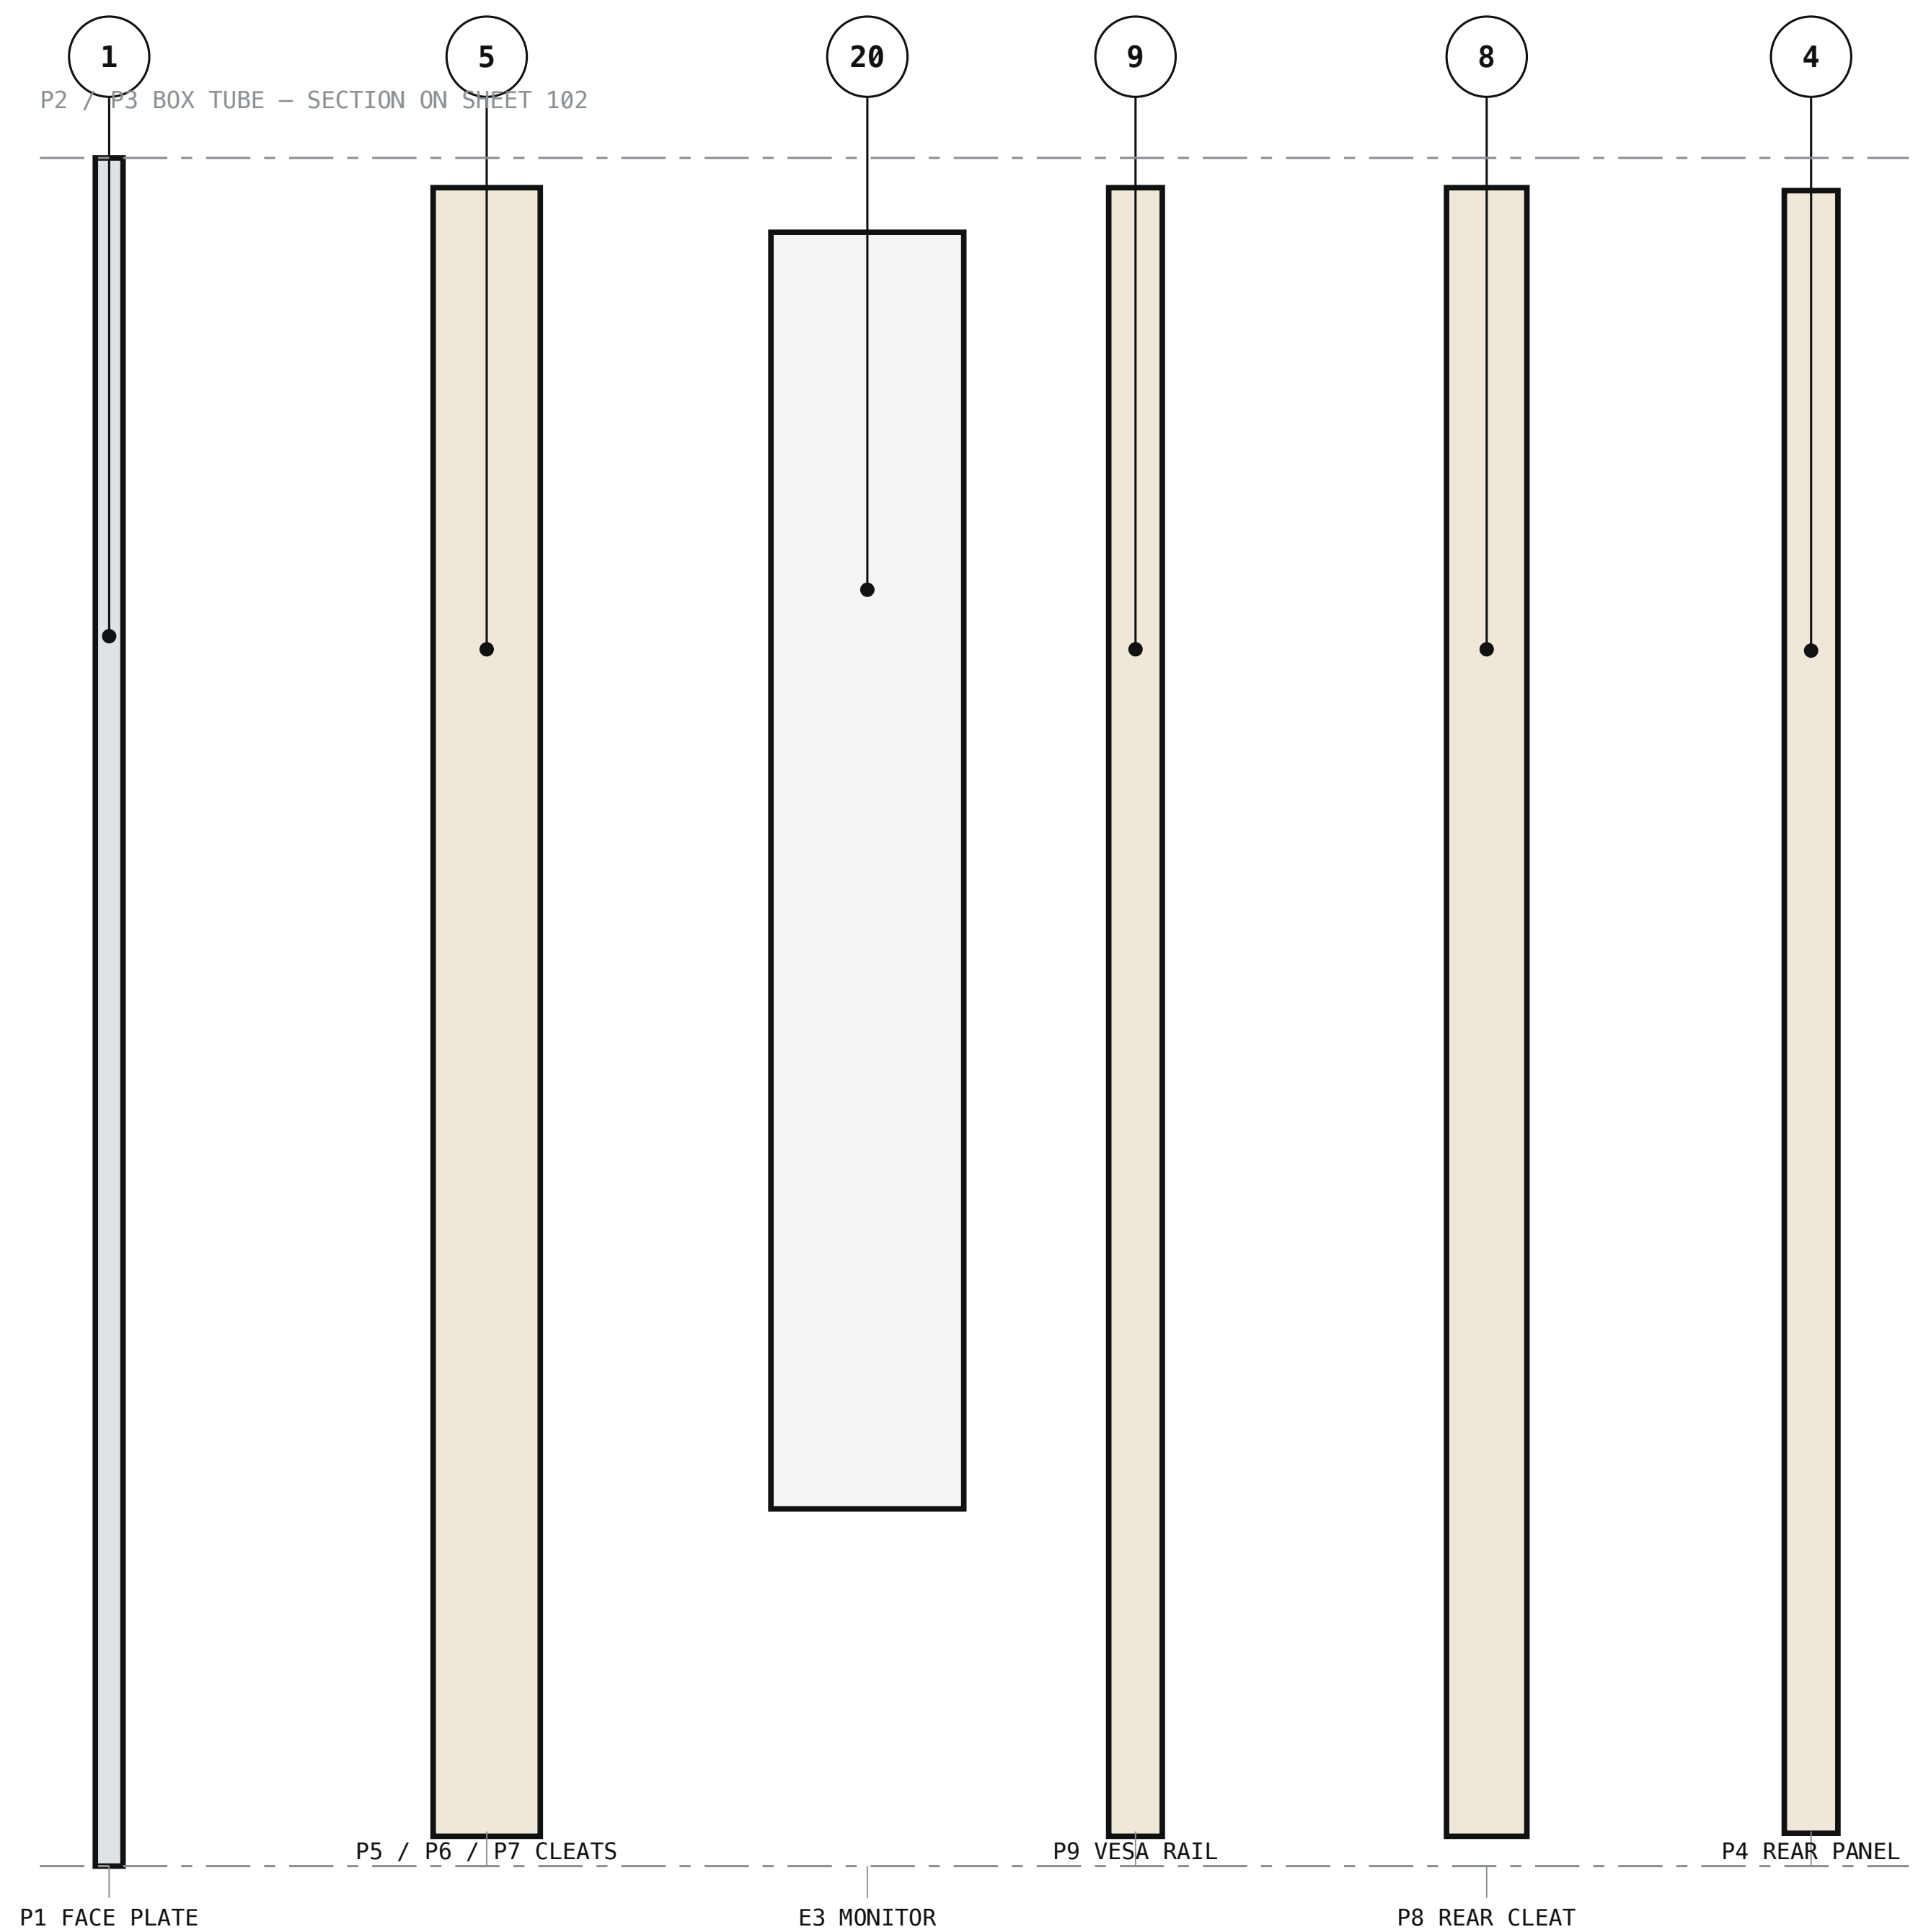

EXPLODED ALONG THE DEPTH AXIS — VIEWED FROM THE RIGHT

SPACING IN Z IS NOT TO SCALE

BILL OF MATERIALS

ITEM	PART	DESCRIPTION	QTY	MATERIAL	DWG
1	P1	FACE PLATE	1	ACM 3 mm, MATTE BLACK 2	200
2	P2	SIDE PANEL	2	BALTIC BIRCH 1/2"	300
3	P3	TOP / BOTTOM PANEL	2	BALTIC BIRCH 1/2"	300
4	P4	REAR PANEL	1	BALTIC BIRCH 1/2"	301
5	P5	FRONT CLEAT, VERTICAL	2	HARDWOOD 1.00 SQ	302
6	P6	FRONT CLEAT, HORIZONTAL	2	HARDWOOD 1.00 SQ	302
7	P7	BUTTON RAIL	1	HARDWOOD 1.00 SQ	302
8	P8	REAR CLEAT, VERTICAL	2	HARDWOOD 0.75 SQ	302
9	P9	VESA RAIL	2	BALTIC BIRCH 1/2"	301
10	P10	RASPBERRY PI TRAY	1	BALTIC BIRCH 1/2"	301
11	H1	INSERT, THREADED, #8–32, WOOD	21	BRASS	400
12	H2	SCREW, #8–32 x 1/2, BUTTON HEAD, PIN–TORX, BLACK	15	STEEL	400
13	H3	FASTENER, QUARTER–TURN / CAPTIVE THUMBSCREW #8–32	6	–	400
14	H4	BOLT, M4 x 12, + WASHER	4	STEEL	400
15	H5	SWITCH, PUSHBUTTON, 30 mm ANTI–VANDAL, MOM., SPST–NO	3	STAINLESS	500
16	H6	INLET, IEC C14, PANEL MOUNT, FUSED	1	–	500
17	H7	SCREW, WOOD, #6 x 1–1/4	40	STEEL	600
18	E1	RASPBERRY PI 4B, 4 GB	1	–	500
19	E2	POWER SUPPLY, 5 V 3 A, USB–C	1	–	500
20	E3	MONITOR, 24" IPS 1080p MATTE, VESA 100	1	–	500
21	E4	CABLE, HDMI, RIGHT–ANGLE, 3 ft	1	–	500

3280 KIOSK · REV 1 STANDALONE — VINTAGE COMPUTER FEDERATION · INFOAGE

EXPLODED VIEW AND BOM	DWG NO 101	REV A
CONCEPT — NOT RELEASED FOR PRODUCTION	SCALE NTS	SHEET 3 OF 12
DRAWN CLAUDE / N. DEMARCO	MATERIAL ASSEMBLY	FINISH —
DATE 2026–08–28	UNITS INCHES	PROJECTION THIRD ANGLE

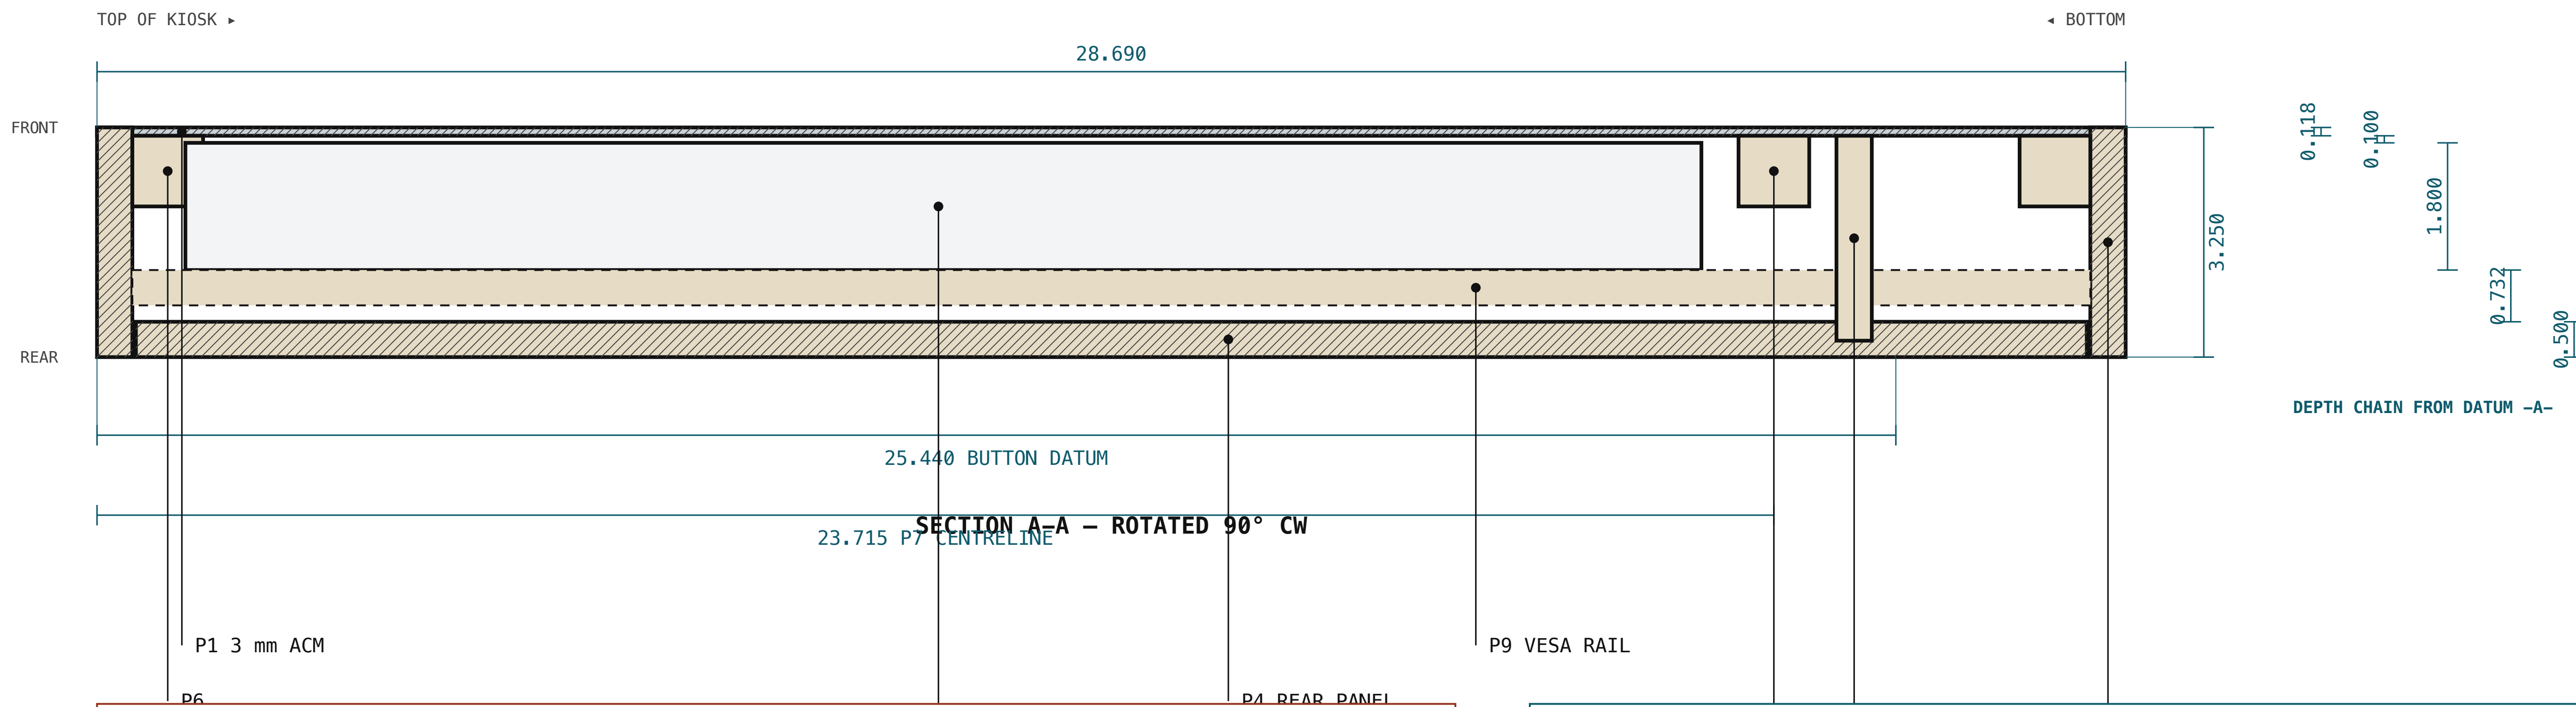

SECTION A–A — ROTATED 90° CW

SERVICE AIR 0.732

Between the monitor at its thickest and the rear panel.
Route HDMI and DC downward into the Pi bay using right-angle
plugs. A straight plug needs 1.750 behind the connector and
will not fit. This is what forces the enclosure depth — not the Pi.

WHY 3.250 AND NOT MORE

ADA §307.2 caps a projection into a circulation path at 4.000
when its leading edge is above 27.000. The kiosk bottom sits at
34.750 AFF, so the rule applies. Enclosure 3.250 leaves 0.750
for the mounting adapter — see sheet 000 note 10.

UNLESS OTHERWISE SPECIFIED
DECIMAL .XX ± .03 .XXX ± .010
CUT PARTS PER SUPPLIER TOLERANCE
BREAK SHARP EDGES · DEBURR ALL HOLES

3280 KIOSK · REV 1 STANDALONE		VINTAGE COMPUTER FEDERATION · INFOAGE
SECTION A–A	DWG NO 102	REV A
CONCEPT — NOT RELEASED FOR PRODUCTION	SCALE 1:2.6 ROTATED 90° CW	SHEET 4 OF 12
DRAWN CLAUDE / N. DEMARCO	MATERIAL ASSEMBLY	FINISH —
DATE 2026-08-28	UNITS INCHES	PROJECTION THIRD ANGLE

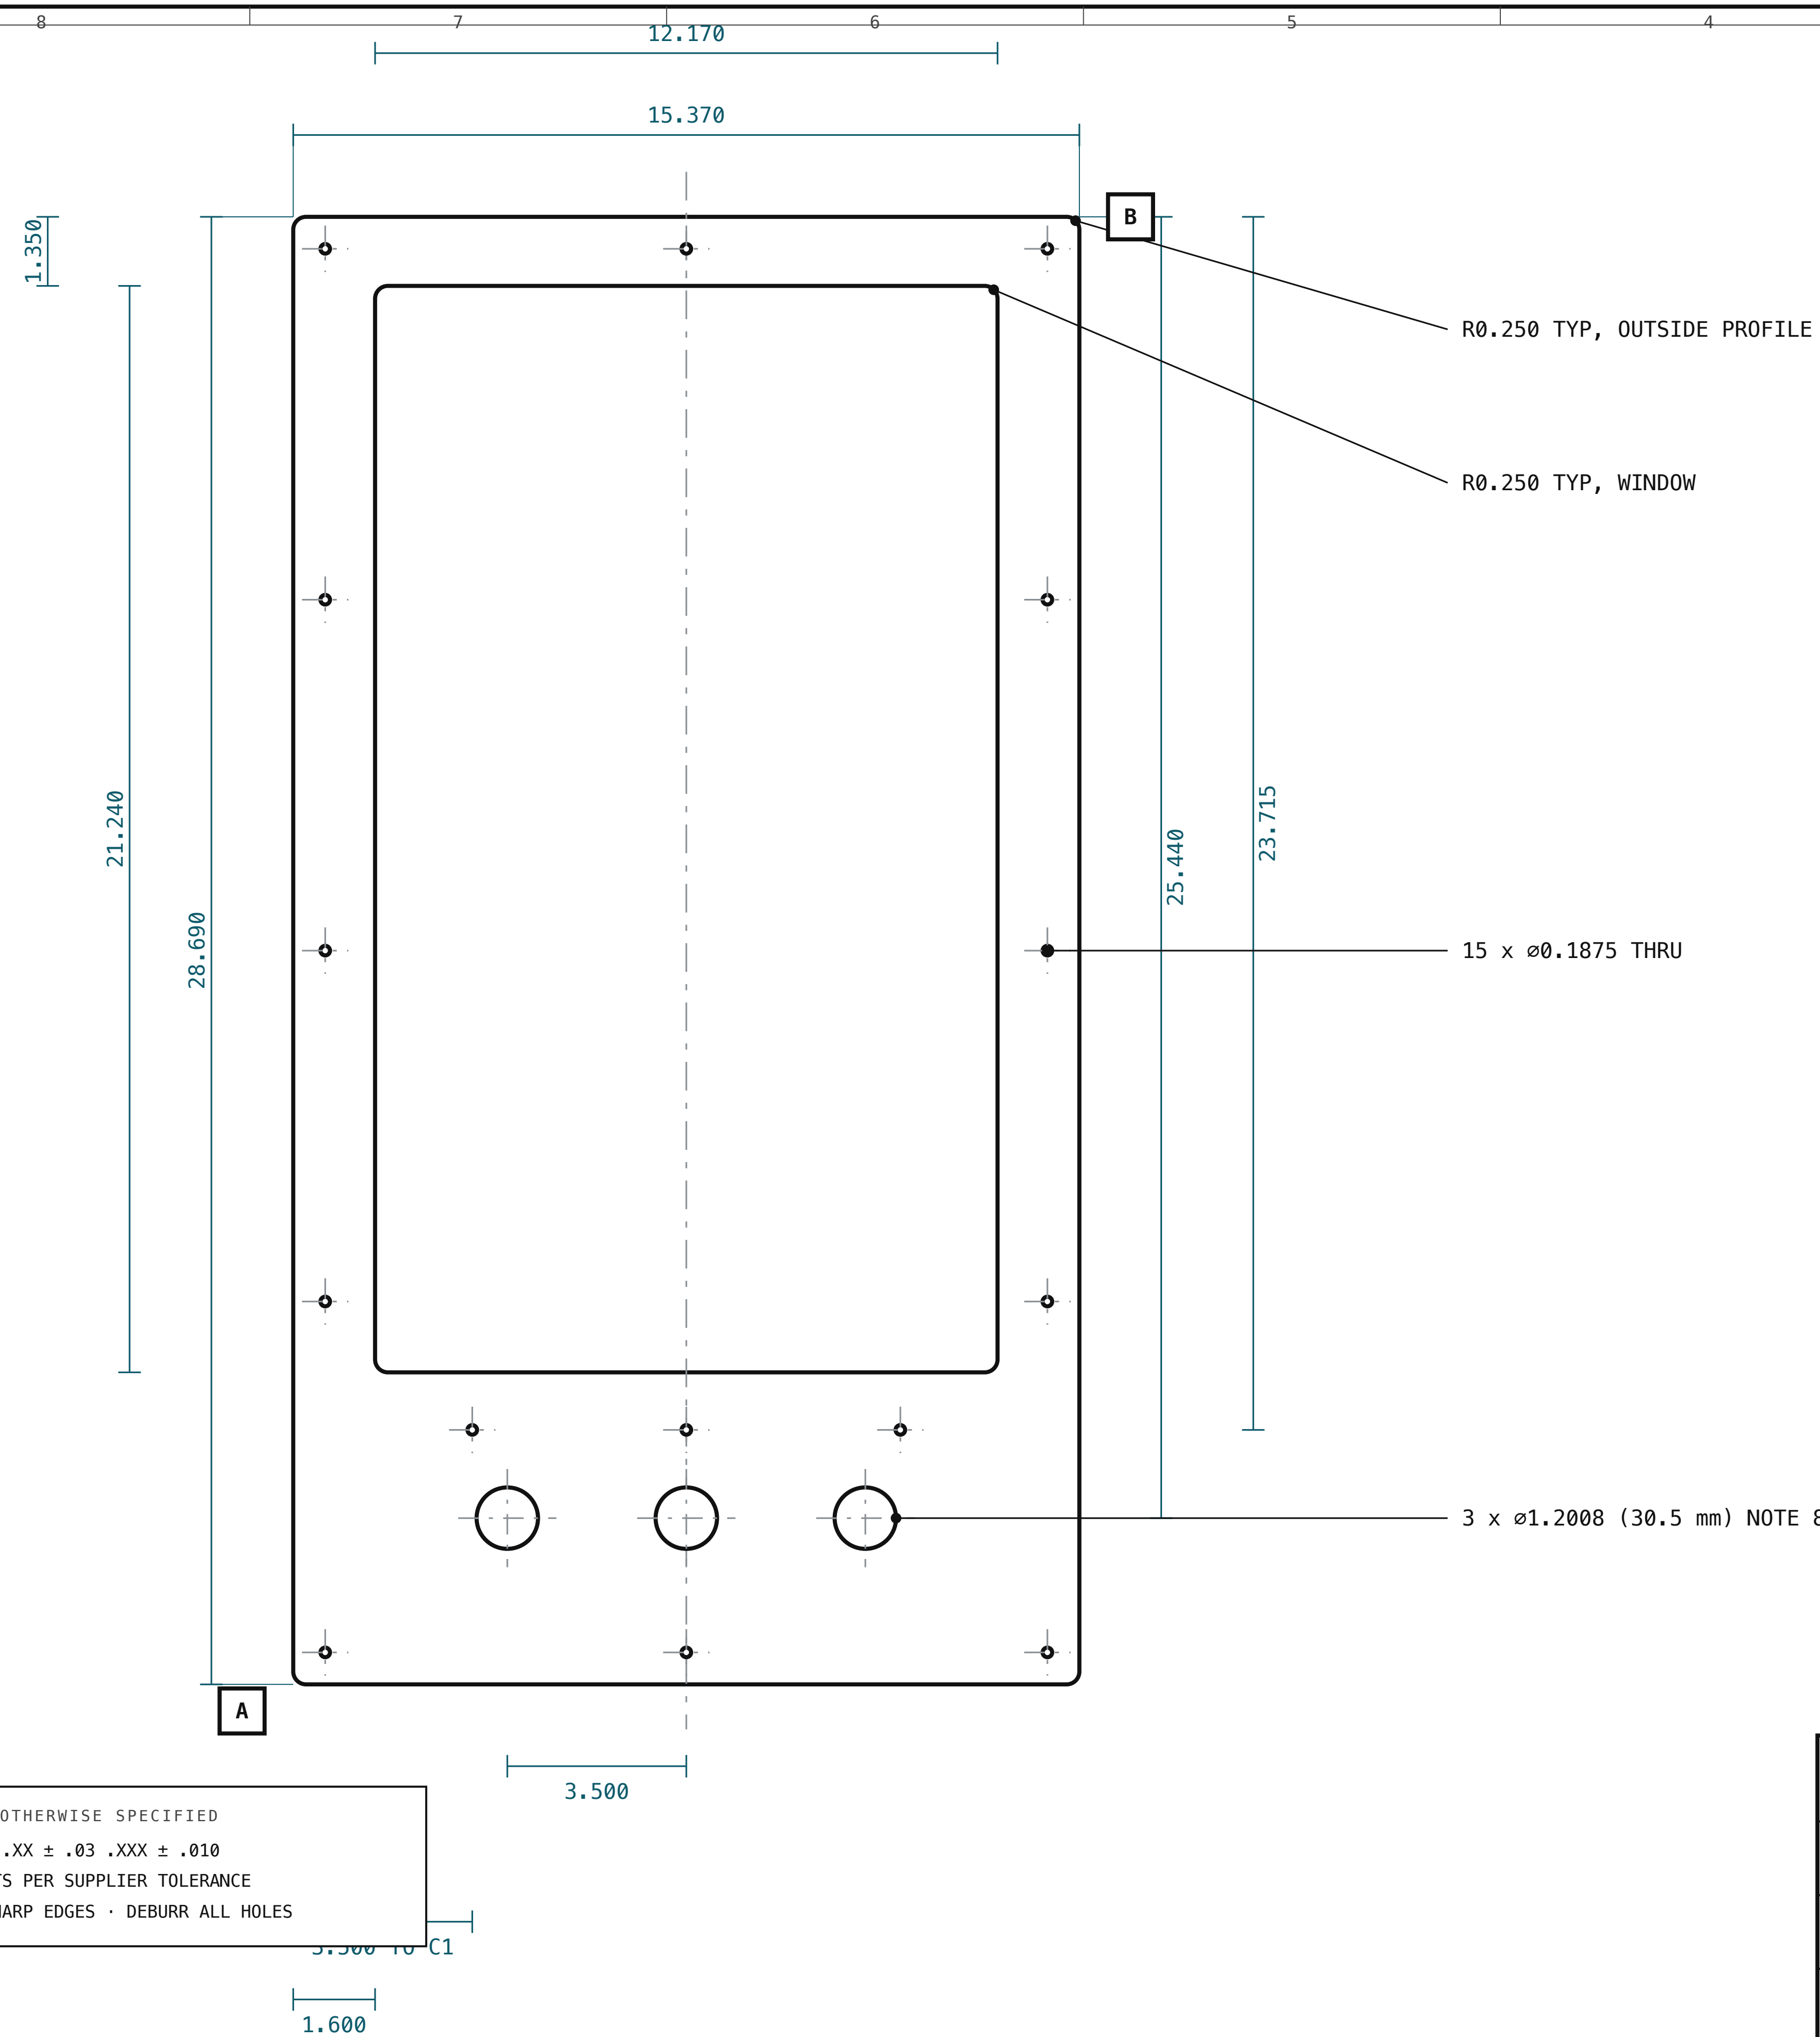

P1 FACE PLATE — FRONT

ONE PIECE, NO SEPARATE BUTTON PLATE

UNLESS OTHERWISE SPECIFIED

DECIMAL .XX ± .03 .XXX ± .010

CUT PARTS PER SUPPLIER TOLERANCE

BREAK SHARP EDGES · DEBURR ALL HOLES

FEATURE SCHEDULE

ID	SIZE	QTY	FUNCTION	ITEM
A	⌀1.2008	3	BUTTON, 30 mm ANTI-VANDAL	H5
B	⌀0.1875	12	PERIMETER FIXING INTO P5 / P6	H1/H2
C	⌀0.1875	3	CLEAT ROW INTO P7 BUTTON RAIL	H1/H2
D	12.170 x 21.240	1	SCREEN WINDOW, R0.250	—
E	15.370 x 28.690	1	OUTSIDE PROFILE, R0.250	—

BEFORE RELEASING THIS SHEET

Verify ⌀1.2008 against the datasheet of the switch actually purchased. This is a one-piece part — a wrong cutout means recutting the whole face.

Also confirm: panel range includes 3 mm, and actuation force ≤ 5 lbf per ADA §309.4.

SUPPLY

CNC routed. A laser will melt the polyethylene core.

DXF: ../fab-rev1/P1-face-plate.dxf — R12, LINE / ARC / CIRCLE.

Supplier tolerance ±0.005 is acceptable throughout.

3280 KIOSK · REV 1 STANDALONE VINTAGE COMPUTER FEDERATION · INFOAGE

P1 FACE PLATE	DWG NO **200**	REV **A**
CONCEPT — NOT RELEASED FOR PRODUCTION	SCALE **1:4**	SHEET **5 OF 12**
DRAWN **CLAUDE / N. DEMARCO**	MATERIAL **ACM 3 mm (0.118)**	FINISH **MATTE BLACK, 2 SIDES**
DATE **2026-08-28**	UNITS **INCHES**	PROJECTION **THIRD ANGLE**

BOX ASSEMBLY — PLAN

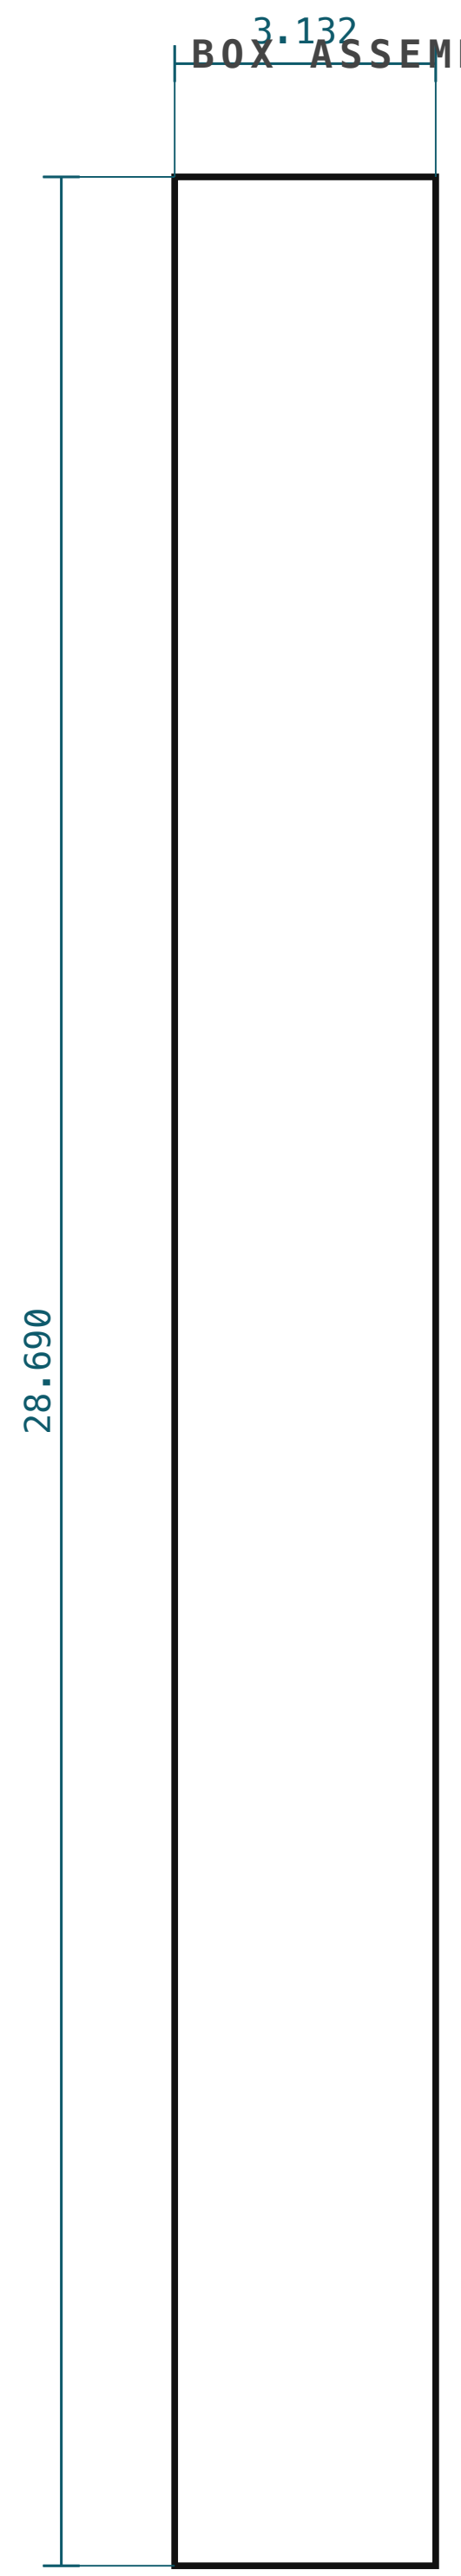

P2 SIDE PANEL QTY 2

BALTIC BIRCH 1/2"

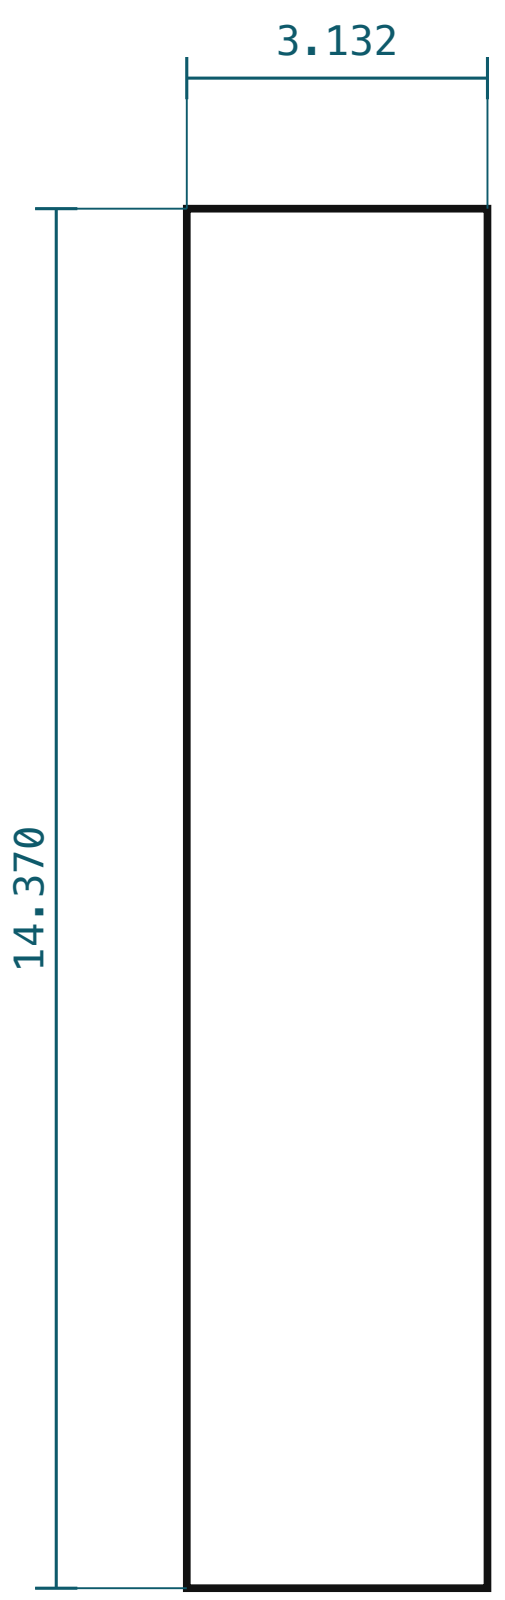

P3 TOP / BOTTOM QTY 2

BALTIC BIRCH 1/2"

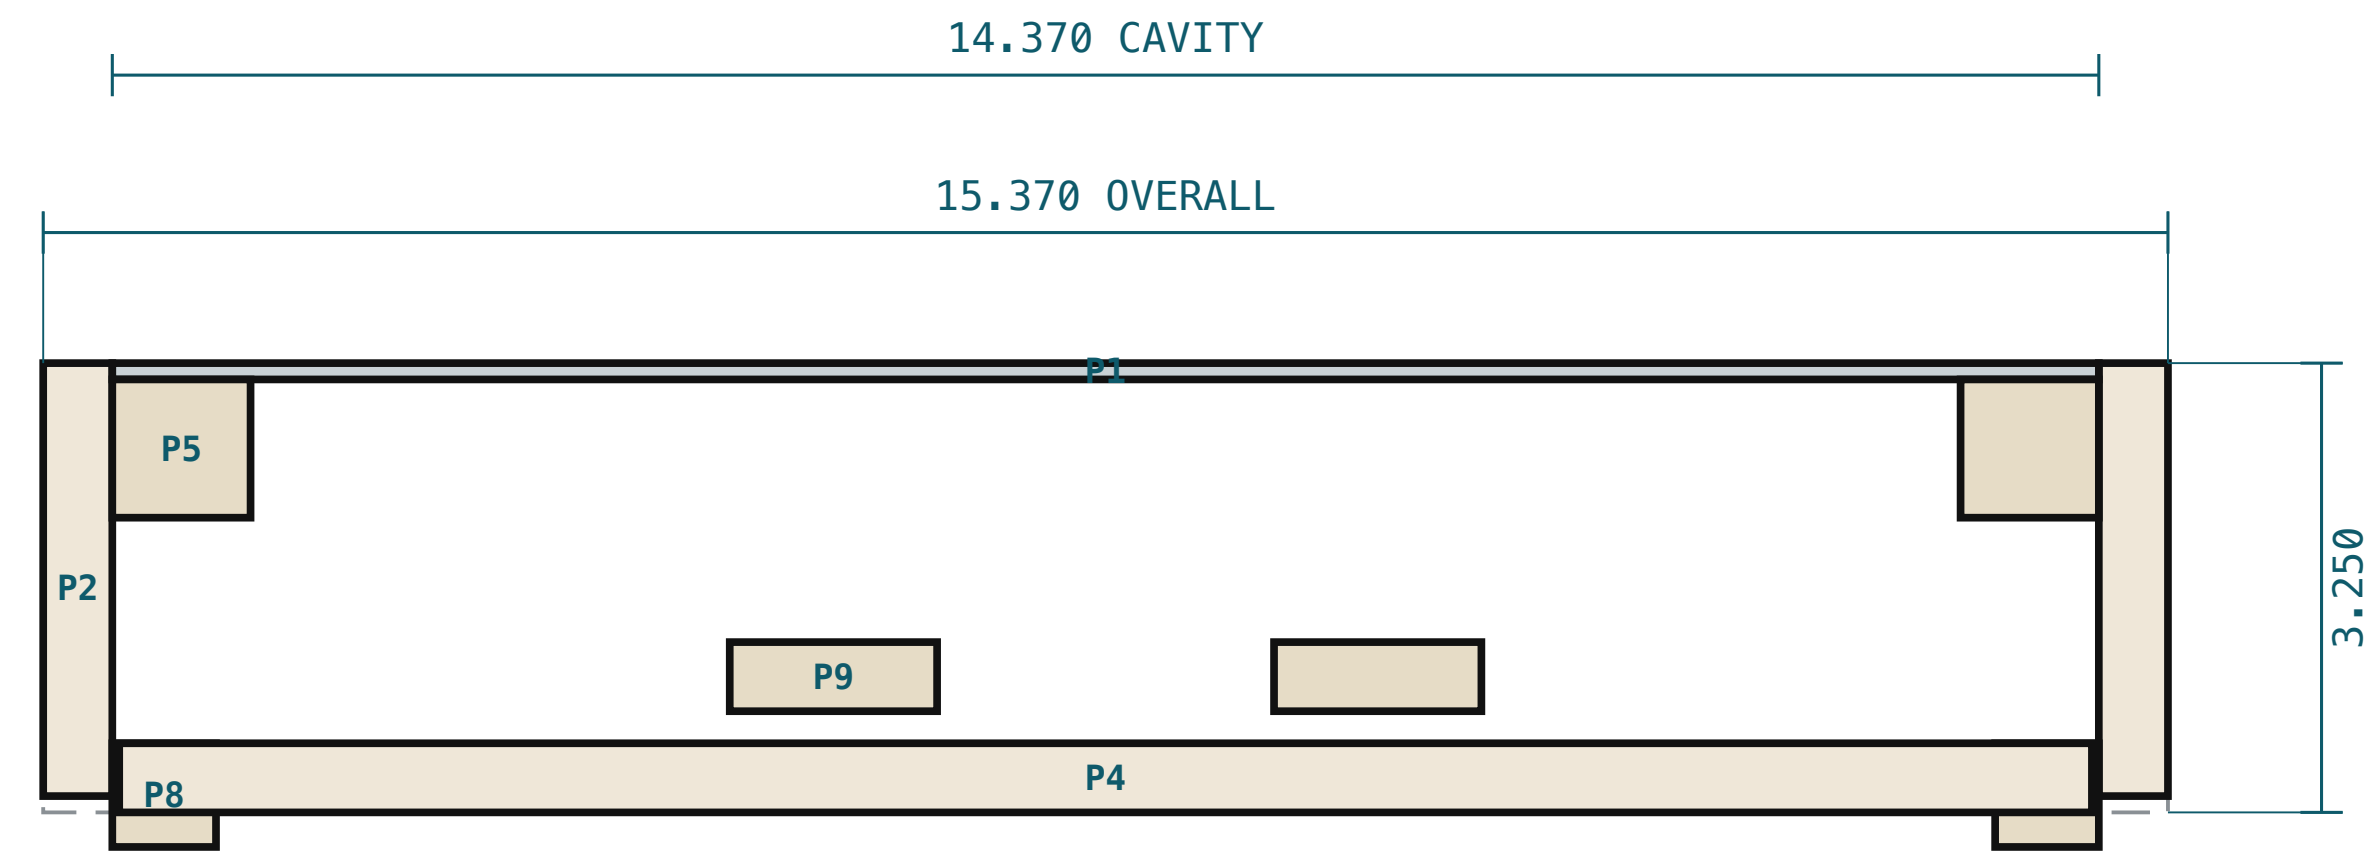

HORIZONTAL SECTION THROUGH THE MONITOR ZONE — SCALE 1:2.6

BOX CONSTRUCTION

P2 SIDES RUN FULL HEIGHT 28.690 AND CAPTURE P3.
P3 TOP AND BOTTOM ARE 14.370 BETWEEN THE SIDES.
GLUE AND SCREW WITH ITEM 17, #6 x 1-1/4, 4 PER JOINT,
PILOT DRILLED. CLAMP SQUARE — DIAGONALS WITHIN 0.06.
CLEATS P5/P6 GLUE FLUSH WITH THE FRONT EDGE.
REAR CLEATS P8 SET BACK 0.750 FROM THE REAR EDGE SO
P4 FINISHES FLUSH.
SEAL AND PAINT ALL INTERNAL SURFACES SATIN BLACK
BEFORE ASSEMBLY — REFLECTIONS SHOW THROUGH THE WINDOW.
GRAIN DIRECTION: LONG AXIS OF EACH PART.

UNLESS OTHERWISE SPECIFIED

DECIMAL .XX ± .03 .XXX ± .010
CUT PARTS PER SUPPLIER TOLERANCE
BREAK SHARP EDGES · DEBURR ALL HOLES

3280 KIOSK · REV 1 STANDALONE		VINTAGE COMPUTER FEDERATION · INFOAGE
P2 / P3 BOX PANELS	DWG NO 300	REV A
CONCEPT — NOT RELEASED FOR PRODUCTION	SCALE 1:4	SHEET 6 OF 12
DRAWN CLAUDE / N. DEMARCO	MATERIAL BALTIC BIRCH 1/2 (0.500)	FINISH SEALED, SATIN BLACK INSIDE
DATE 2026-08-28	UNITS INCHES	PROJECTION THIRD ANGLE

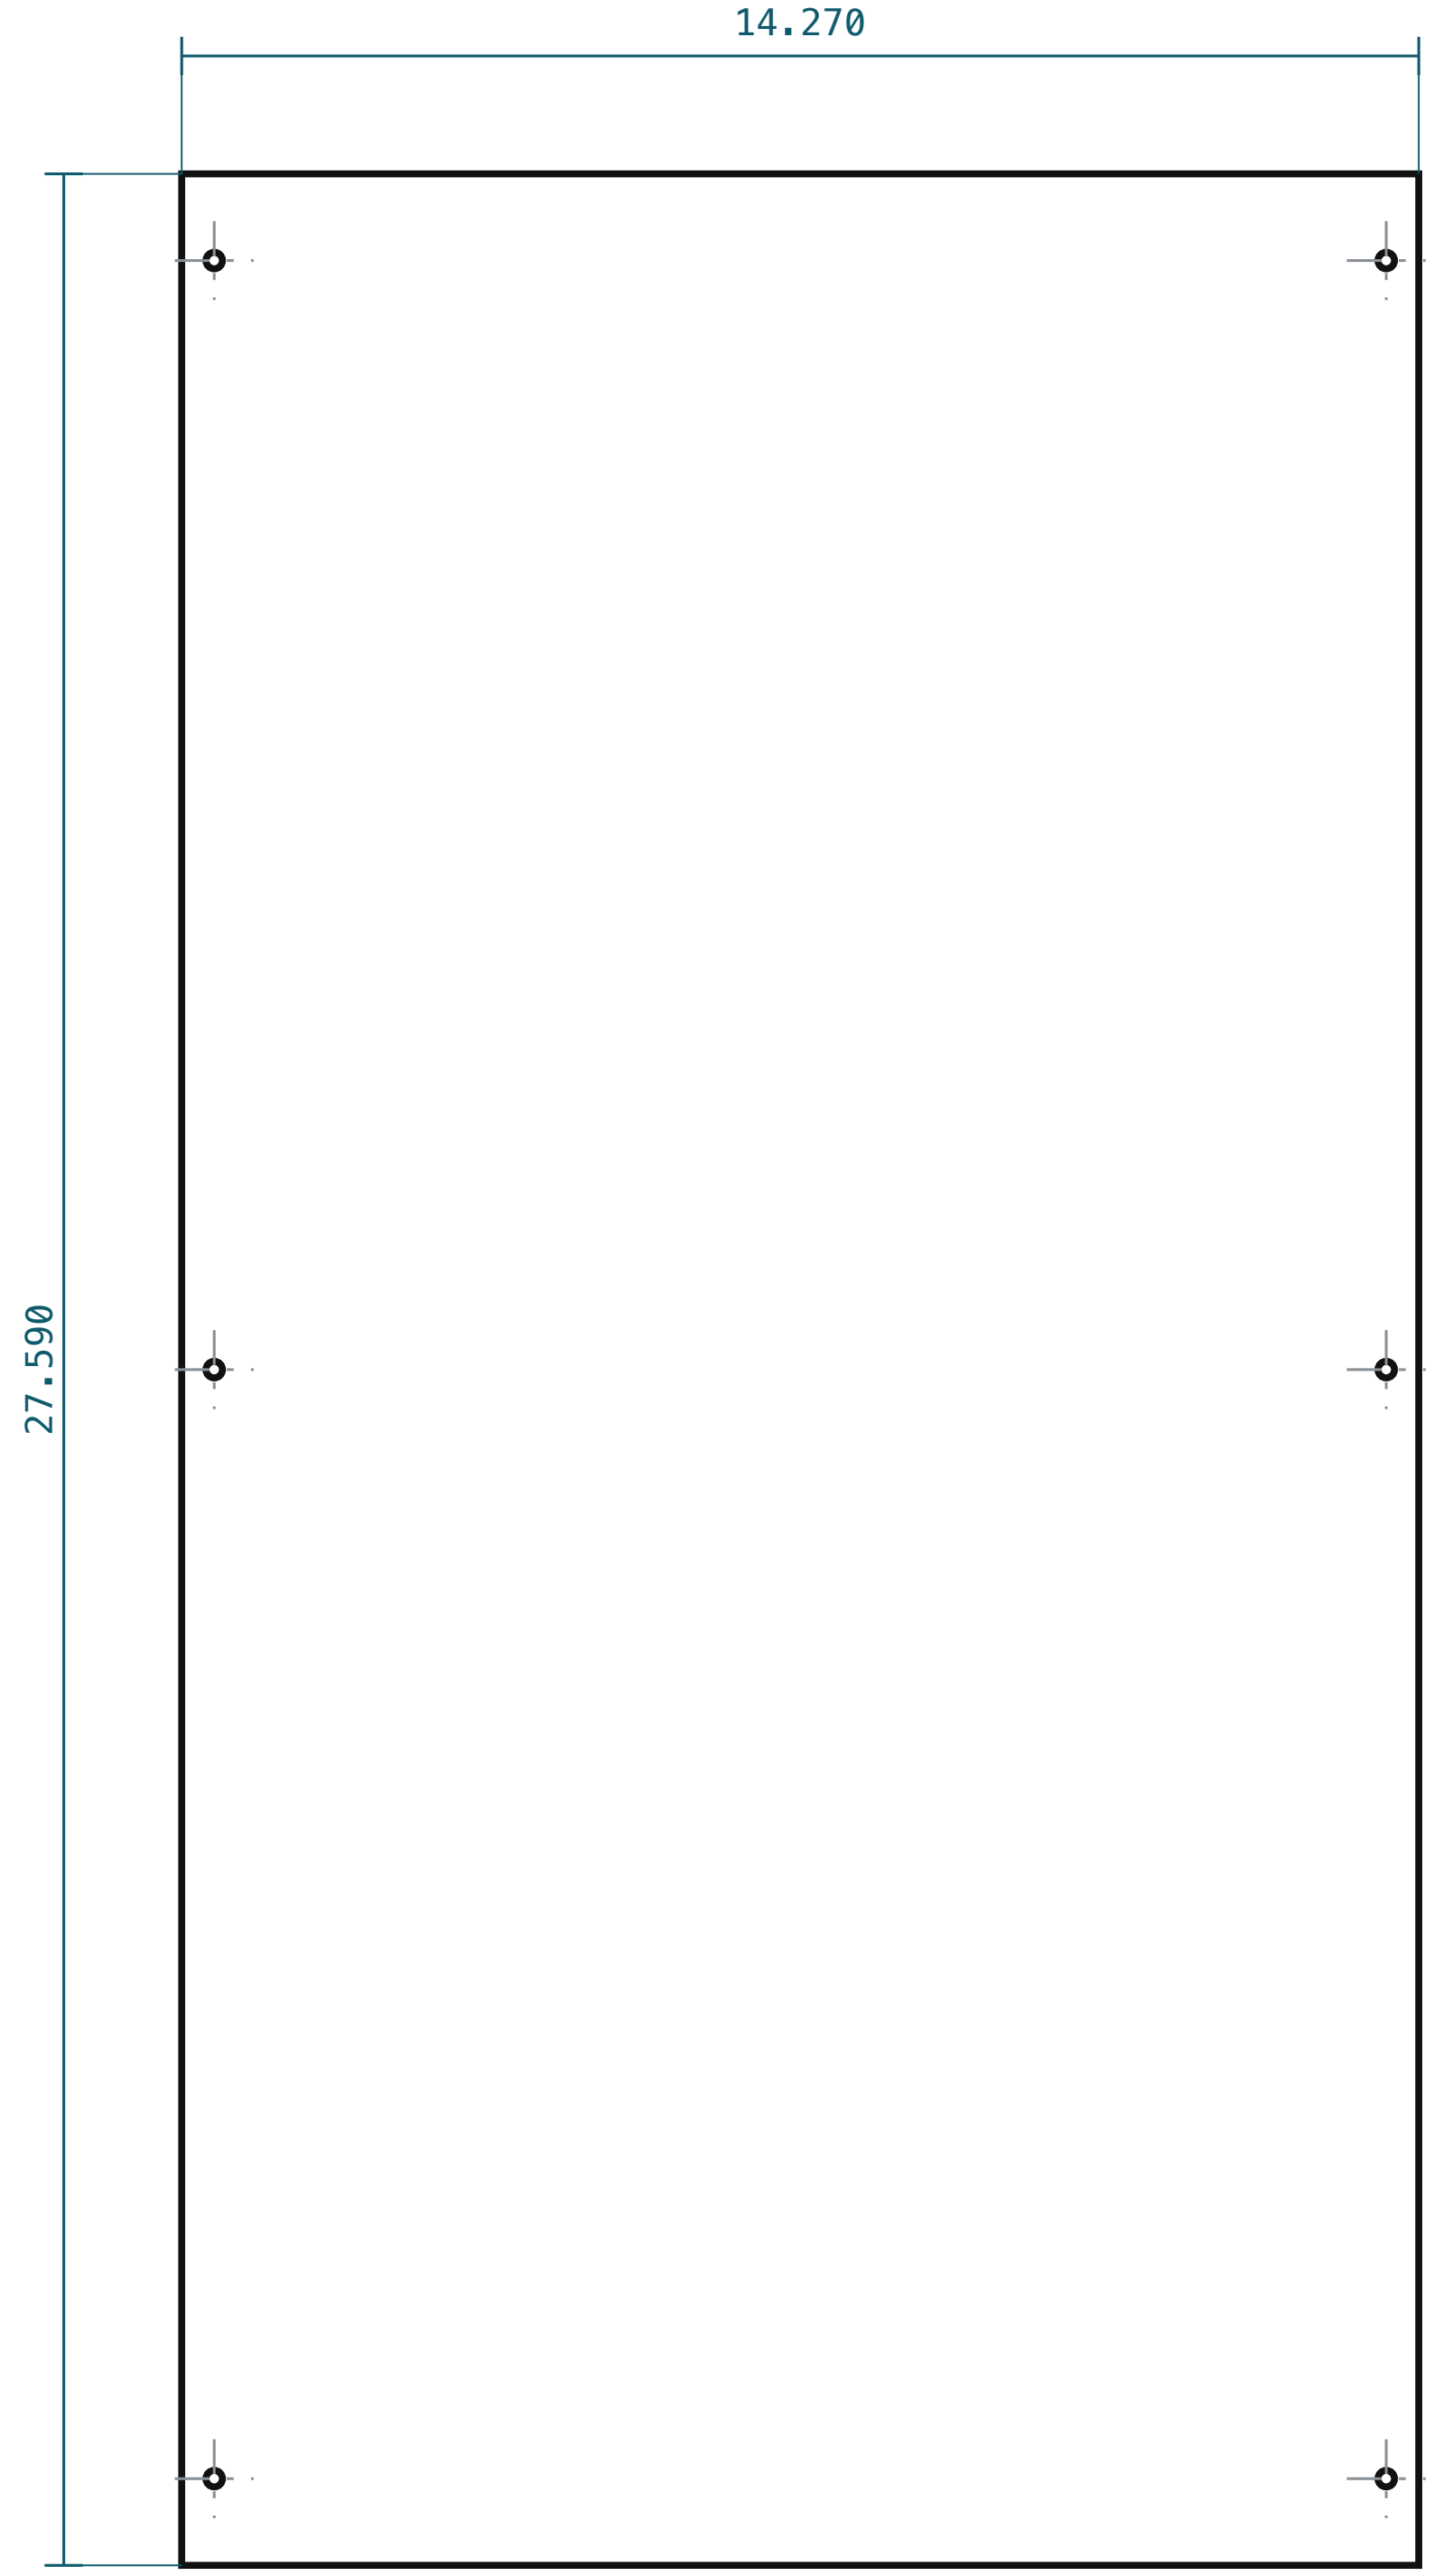

P4 REAR PANEL QTY 1

BALTIC BIRCH 1/2"

ITEM 13

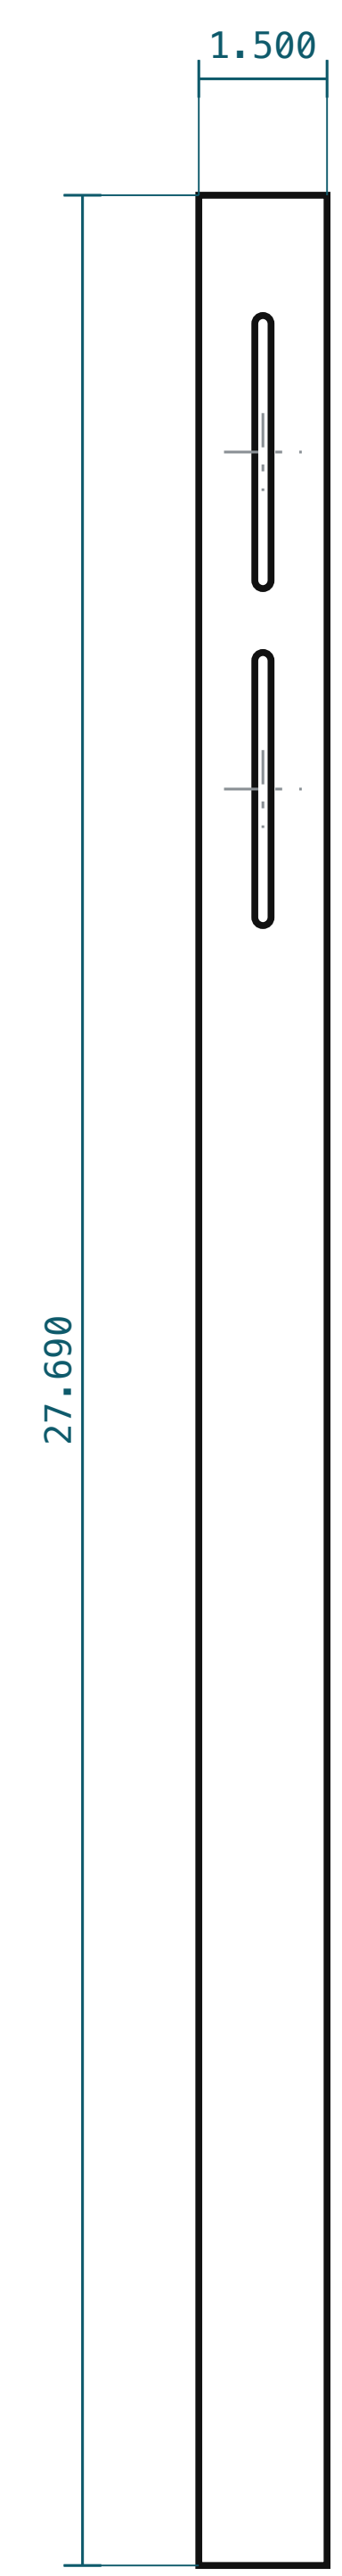

P9 VESA RAIL QTY 2

BALTIC BIRCH 1/2"

SLOTS ⌀0.190 x 3.000 TRAVEL

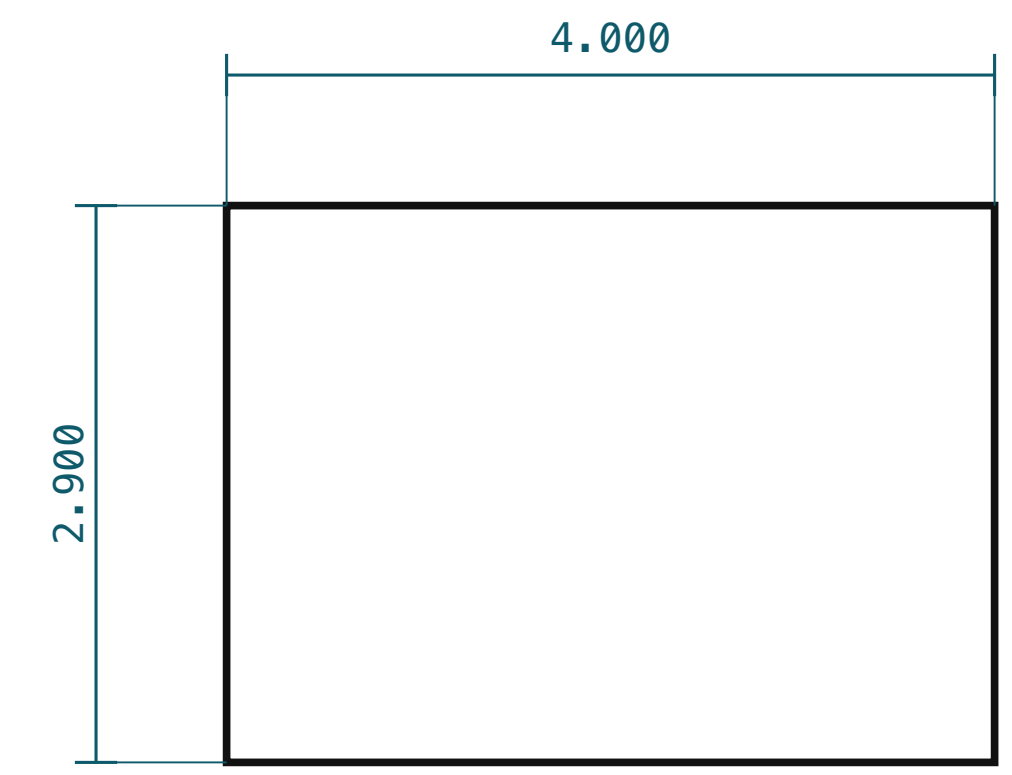

P10 PI TRAY QTY 1

BALTIC BIRCH 1/2"

MONITOR MOUNTING — P9

VESA 100 x 100 (3.937 SQUARE). TWO RAILS AT X = 5.716 AND 9.654 FROM THE LEFT EDGE OF P1.

THE SLOTS GIVE 3.000 OF VERTICAL TRAVEL. THE MONITOR IS ALIGNED TO THE P1 WINDOW, NOT TO THE BOX — SET IT BY EYE THROUGH THE WINDOW WITH THE FACE PLATE TEMPORARILY FITTED, THEN TIGHTEN ITEM 14.

DEPTH IS SET BY THE MONITOR, NOT BY THIS DRAWING. THE VESA BOSS SITS AT A DIFFERENT DEPTH ON EVERY MODEL. SHIM BEHIND P9 AT ASSEMBLY SO THE PANEL FACE LANDS 0.100 BEHIND P1.

CHECK BEFORE ORDERING THE MONITOR: MATTE, IPS, VESA 100, AND IT MUST POWER ITSELF ON AFTER A MAINS CUT.

P10 PI TRAY

SITS IN THE BAY BELOW THE MONITOR ON TWO 0.500 SQ CLEATS. SLIDES OUT FORWARD ONCE P4 IS OFF. RASPBERRY PI 4B MOUNTS ON M2.5 STANDOFFS, 58.0 x 49.0 HOLE PATTERN.

UNLESS OTHERWISE SPECIFIED

DECIMAL .XX ± .03 .XXX ± .010

CUT PARTS PER SUPPLIER TOLERANCE

BREAK SHARP EDGES · DEBURR ALL HOLES

3280 KIOSK · REV 1 STANDALONE		VINTAGE COMPUTER FEDERATION · INFOAGE
P4 / P9 / P10	DWG NO 301	REV A
CONCEPT — NOT RELEASED FOR PRODUCTION	SCALE 1:4	SHEET 7 OF 12
DRAWN CLAUDE / N. DEMARCO	MATERIAL BALTIC BIRCH 1/2 (0.500)	FINISH SEALED, SATIN BLACK
DATE 2026-08-28	UNITS INCHES	PROJECTION THIRD ANGLE

CLEAT NOTES

1. P5 AND P6 GLUE INSIDE THE BOX FLUSH WITH THE FRONT EDGE. P5 RUNS THE FULL CAVITY HEIGHT; P6 FITS BETWEEN THEM.
2. P7 IS THE BUTTON RAIL. ITS CENTRELINE SITS 23.715 BELOW THE TOP OF P1, WHICH IS 1.725 ABOVE THE BUTTON CENTRELINE — CLEAR OF THE SWITCH BODIES, WHICH STAND ABOUT 1.000 PROUD BEHIND THE PLATE.
3. DRILL ITEM 11 THREADED INSERTS USING P1 AS THE TEMPLATE. CLAMP P1 IN PLACE, SPOT THROUGH ALL 15 HOLES, REMOVE, THEN DRILL AND SET THE INSERTS.
4. NEVER DRIVE A FASTENER INTO A PLYWOOD EDGE. THAT IS WHAT THESE CLEATS ARE FOR.
5. P8 SETS BACK 0.750 FROM THE REAR EDGE SO P4 FINISHES FLUSH.
6. HARDWOOD PREFERRED FOR INSERT PULL-OUT STRENGTH. POPLAR OR MAPLE IS FINE.

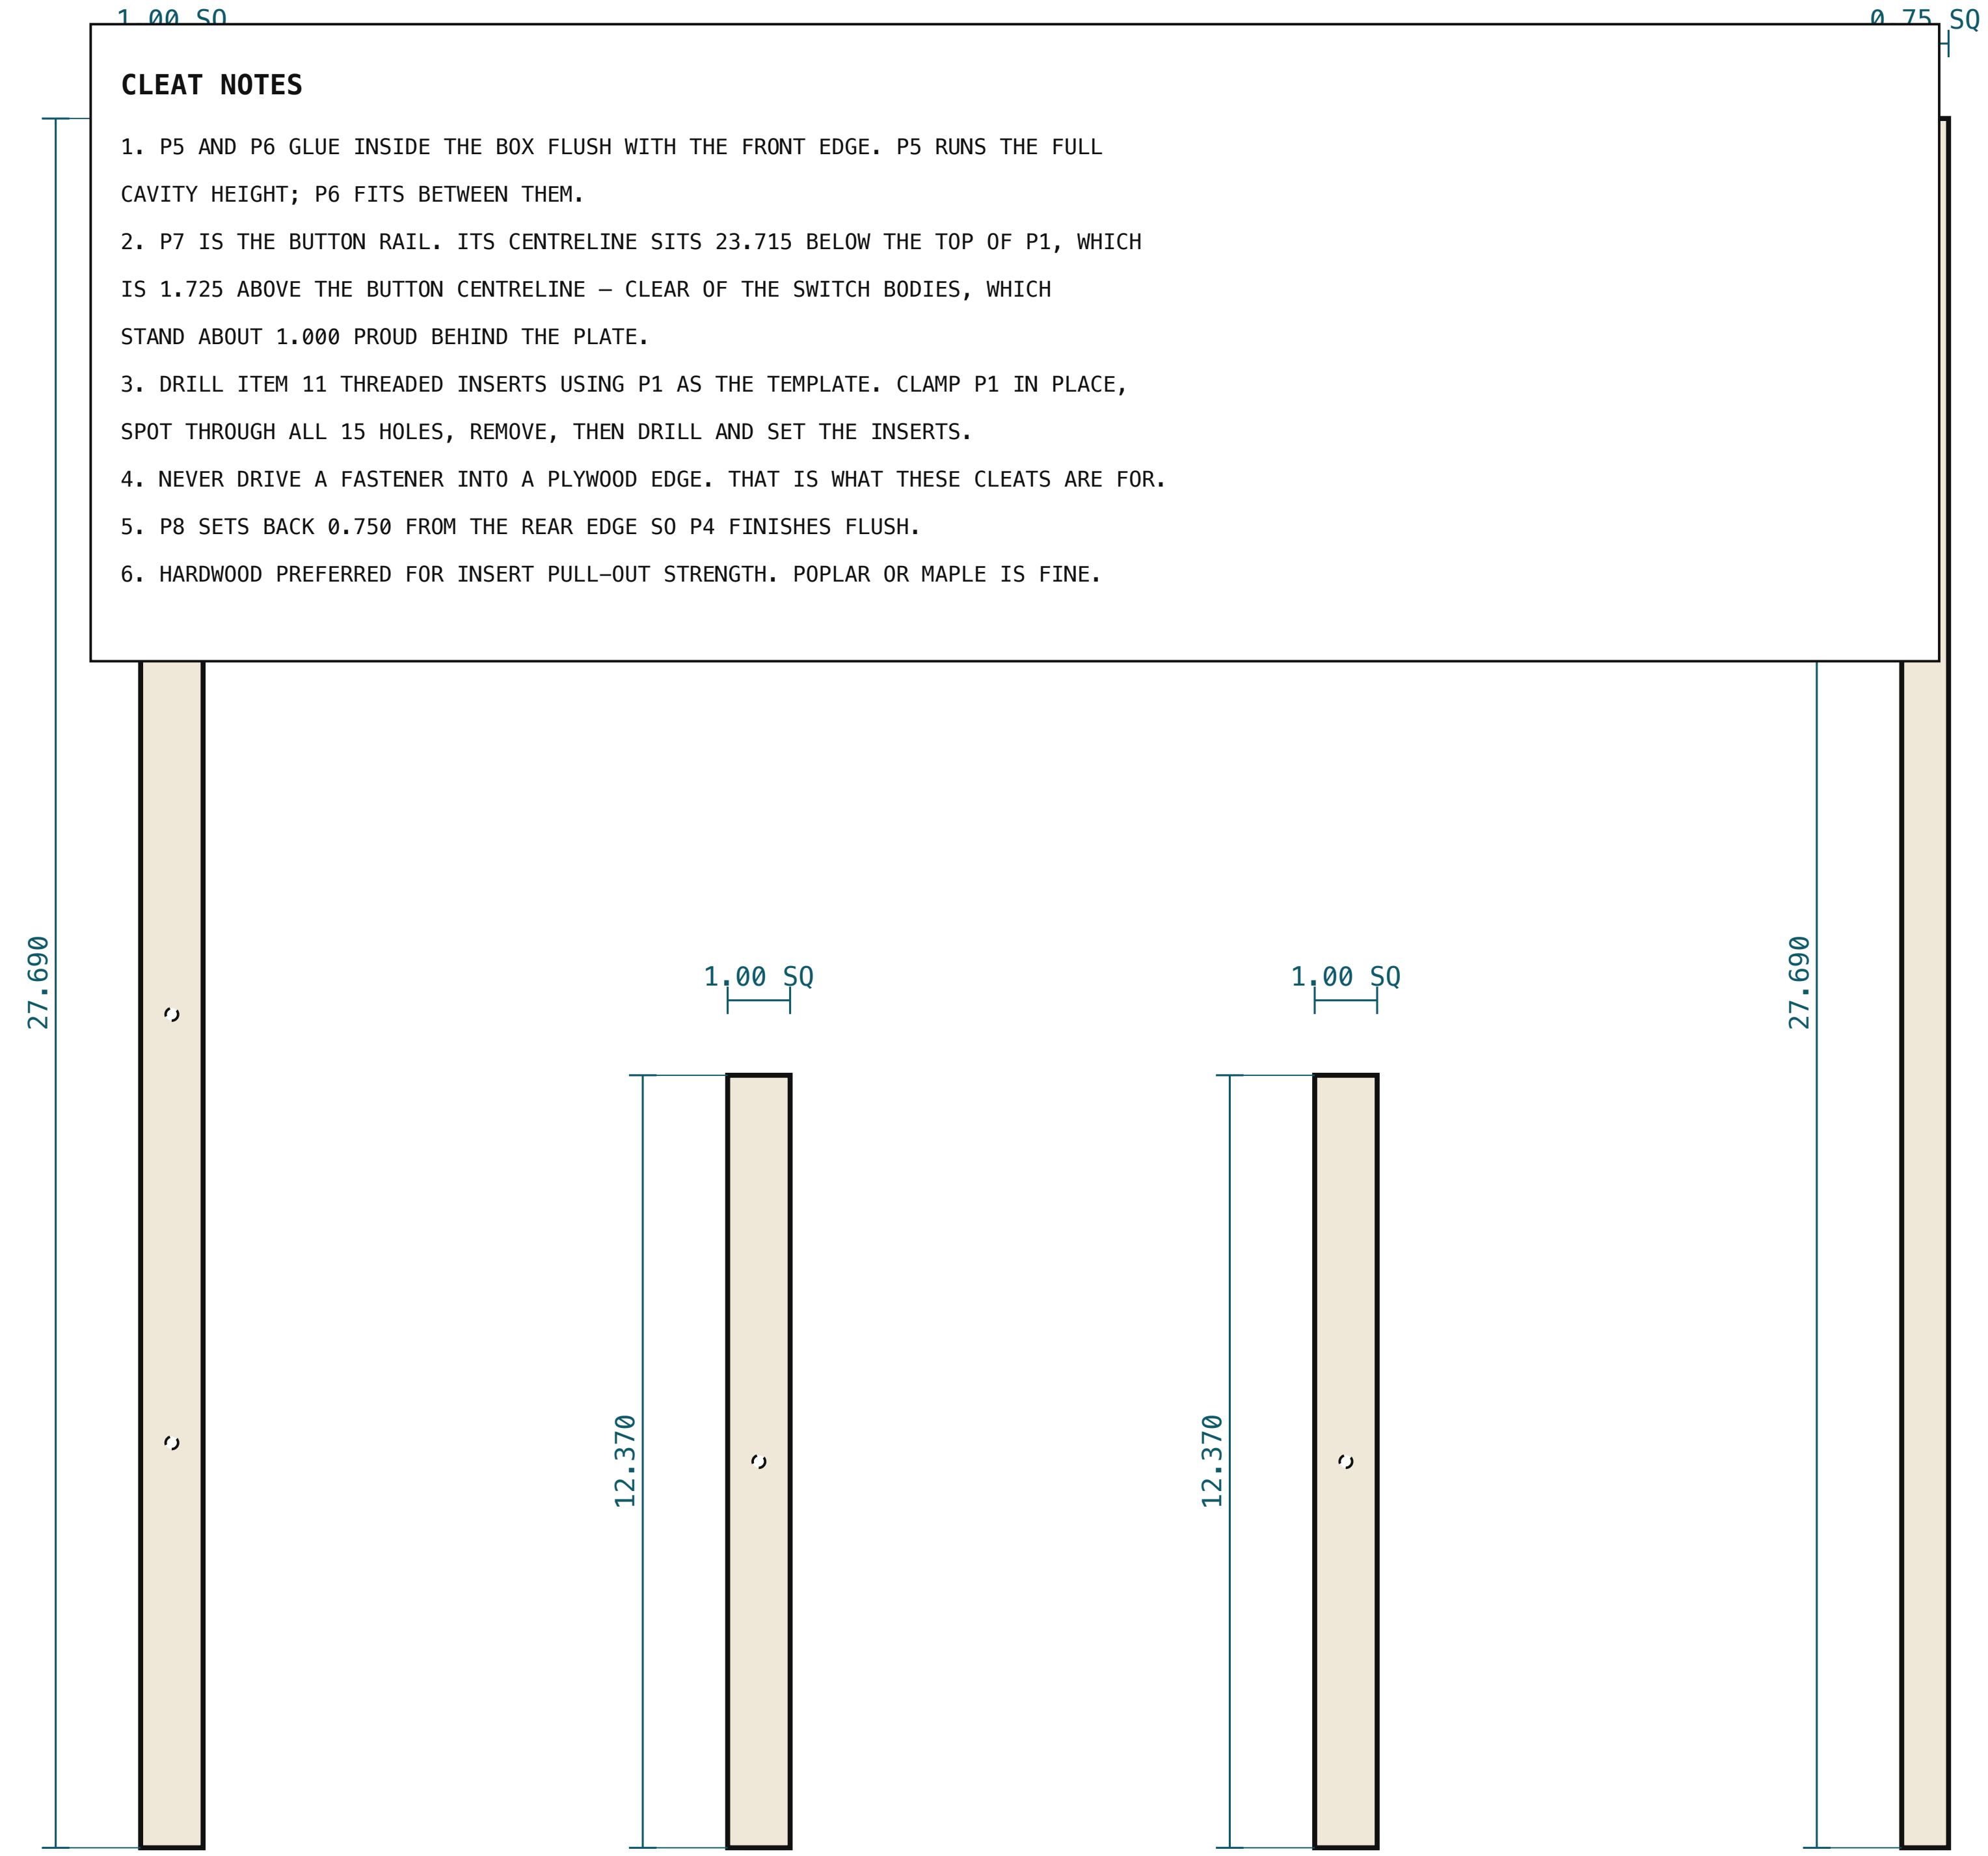

P5 QTY 2
FRONT CLEAT, VERTICAL
ITEM 11 INSERTS ON P1 HOLE CENTRES

P6 QTY 2
FRONT CLEAT, HORIZONTAL
ITEM 11 INSERTS ON P1 HOLE CENTRES

P7 QTY 1
BUTTON RAIL
ITEM 11 INSERTS ON P1 HOLE CENTRES

P8 QTY 2
REAR CLEAT, VERTICAL

UNLESS OTHERWISE SPECIFIED
DECIMAL .XX ± .03 .XXX ± .010
CUT PARTS PER SUPPLIER TOLERANCE
BREAK SHARP EDGES · DEBURR ALL HOLES

3280 KIOSK · REV 1 STANDALONE		VINTAGE COMPUTER FEDERATION · INFOAGE
	DWG NO 302	REV A
CONCEPT — NOT RELEASED FOR PRODUCTION	SCALE 1:4	SHEET 8 OF 12
DRAWN CLAUDE / N. DEMARCO	MATERIAL HARDWOOD, CLEAR	FINISH SEALED, SATIN BLACK
DATE 2026-08-28	UNITS INCHES	PROJECTION THIRD ANGLE

HOLE SCHEDULE

TAG	X	Y	⌀	DEPTH / THRU	RECEIVES
A1	4.185	25.440	1.2008	THRU 0.118	H5 SWITCH, 30 mm ANTI-VANDAL
A2	7.685	25.440	1.2008	THRU 0.118	H5 SWITCH, 30 mm ANTI-VANDAL
A3	11.185	25.440	1.2008	THRU 0.118	H5 SWITCH, 30 mm ANTI-VANDAL
B1	0.625	0.625	0.1875	THRU 0.118	H2 SCREW INTO H1 INSERT IN P5 / P6
B2	14.745	0.625	0.1875	THRU 0.118	H2 SCREW INTO H1 INSERT IN P5 / P6
B3	0.625	7.485	0.1875	THRU 0.118	H2 SCREW INTO H1 INSERT IN P5 / P6
B4	14.745	7.485	0.1875	THRU 0.118	H2 SCREW INTO H1 INSERT IN P5 / P6
B5	0.625	14.345	0.1875	THRU 0.118	H2 SCREW INTO H1 INSERT IN P5 / P6
B6	14.745	14.345	0.1875	THRU 0.118	H2 SCREW INTO H1 INSERT IN P5 / P6
B7	0.625	21.205	0.1875	THRU 0.118	H2 SCREW INTO H1 INSERT IN P5 / P6
B8	14.745	21.205	0.1875	THRU 0.118	H2 SCREW INTO H1 INSERT IN P5 / P6
B9	0.625	28.065	0.1875	THRU 0.118	H2 SCREW INTO H1 INSERT IN P5 / P6
B10	14.745	28.065	0.1875	THRU 0.118	H2 SCREW INTO H1 INSERT IN P5 / P6
B11	7.685	0.625	0.1875	THRU 0.118	H2 SCREW INTO H1 INSERT IN P5 / P6
B12	7.685	28.065	0.1875	THRU 0.118	H2 SCREW INTO H1 INSERT IN P5 / P6
C1	3.500	23.715	0.1875	THRU 0.118	H2 SCREW INTO H1 INSERT IN P7
C2	7.685	23.715	0.1875	THRU 0.118	H2 SCREW INTO H1 INSERT IN P7
C3	11.870	23.715	0.1875	THRU 0.118	H2 SCREW INTO H1 INSERT IN P7

FASTENER NOTES

1. DRILL H1 INSERTS USING P1 AS THE TEMPLATE — CLAMP, SPOT THROUGH ALL 15 HOLES, REMOVE, DRILL, SET.
2. H2 IS PIN-TORX SO THE PUBLIC CANNOT CASUALLY REMOVE THE FACE. HEADS ARE VISIBLE: BLACK ON BLACK, TREATED AS AN INSTRUMENT-PANEL DETAIL. SEE SHEET 000 NOTE 7 FOR THE BONDED ALTERNATE.
3. H3 QUARTER-TURN FASTENERS ON P4 — CAPTIVE, SO NOTHING DROPS INSIDE A MUSEUM ARTIFACT.
4. TORQUE H2 TO SEAT ONLY. ACM WILL DIMPLE IF OVERTIGHTENED.
5. NO FASTENER IN THIS PACKAGE ENTERS THE CONCURRENT 3280.

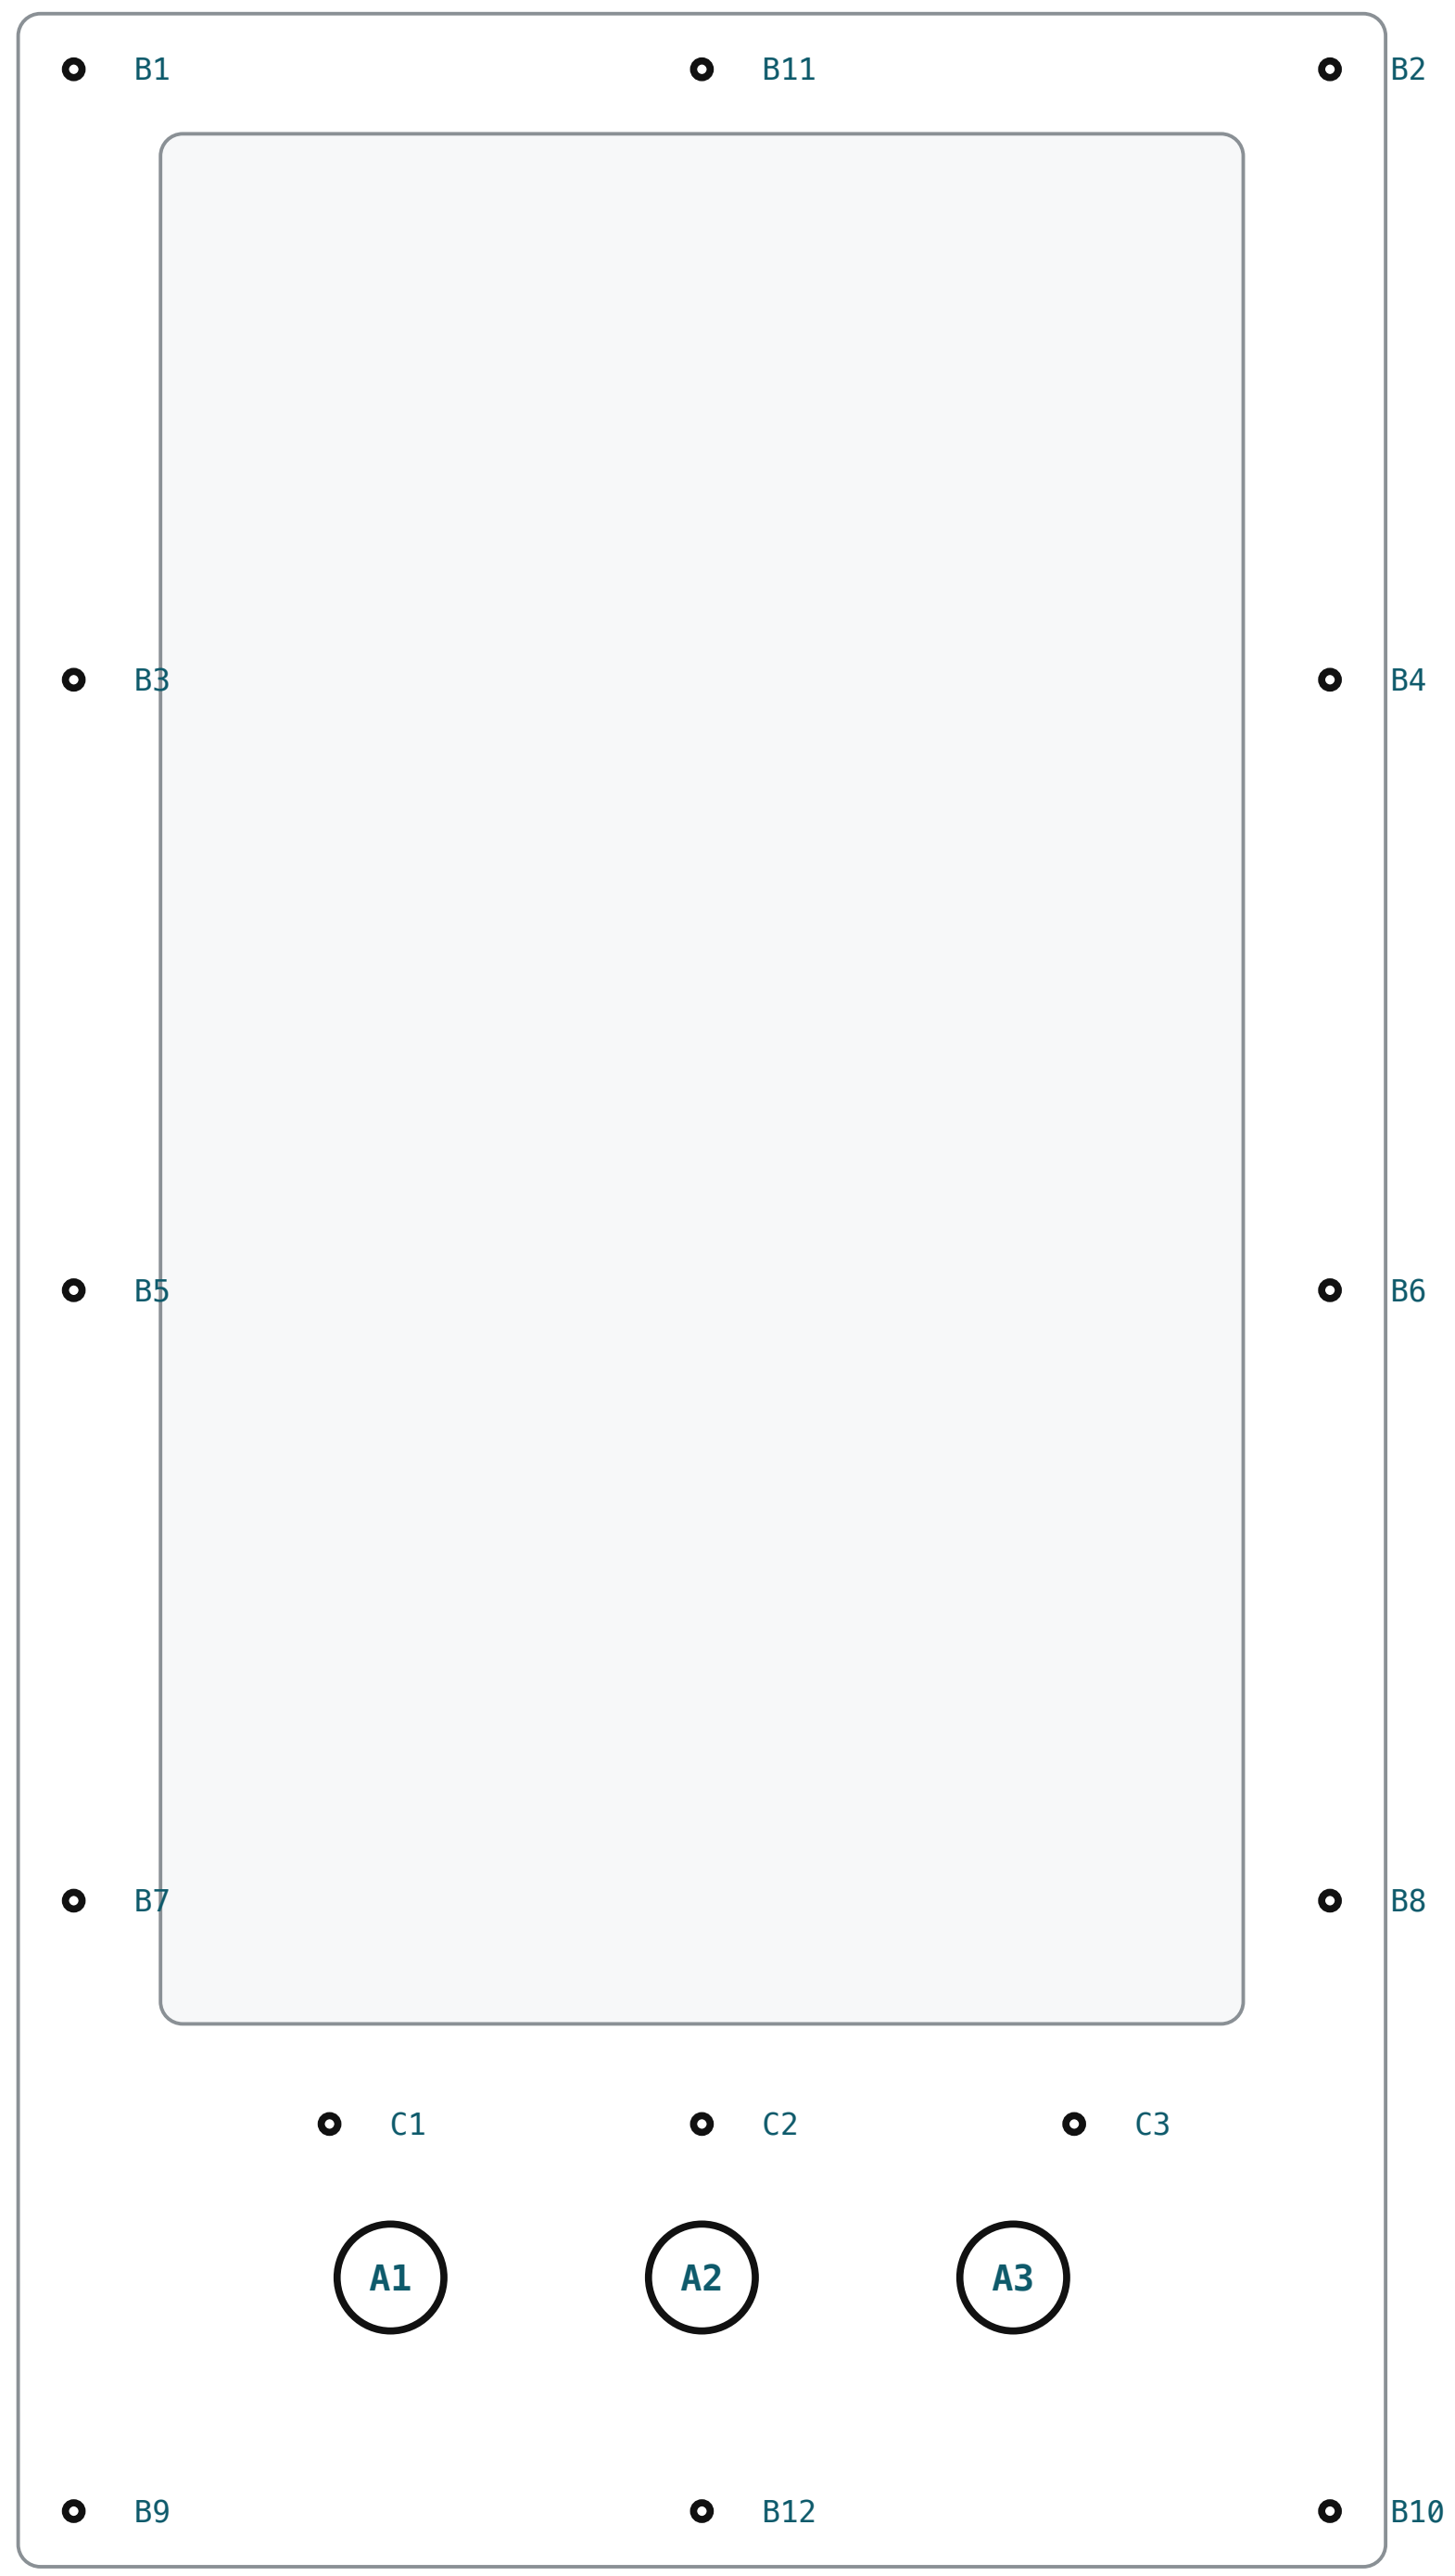

P1 — HOLE LOCATION MAP

ALL POSITIONS FROM DATUM -A- (LEFT EDGE) AND -B- (TOP EDGE)

3280 KIOSK · REV 1 STANDALONE — VINTAGE COMPUTER FEDERATION · INFOAGE

HOLE SCHEDULE	DWG NO 400	REV A
CONCEPT — NOT RELEASED FOR PRODUCTION	SCALE 1:4	SHEET 9 OF 12
DRAWN CLAUDE / N. DEMARCO	MATERIAL —	FINISH —
DATE 2026-08-28	UNITS INCHES	PROJECTION THIRD ANGLE

POWER DISTRIBUTION

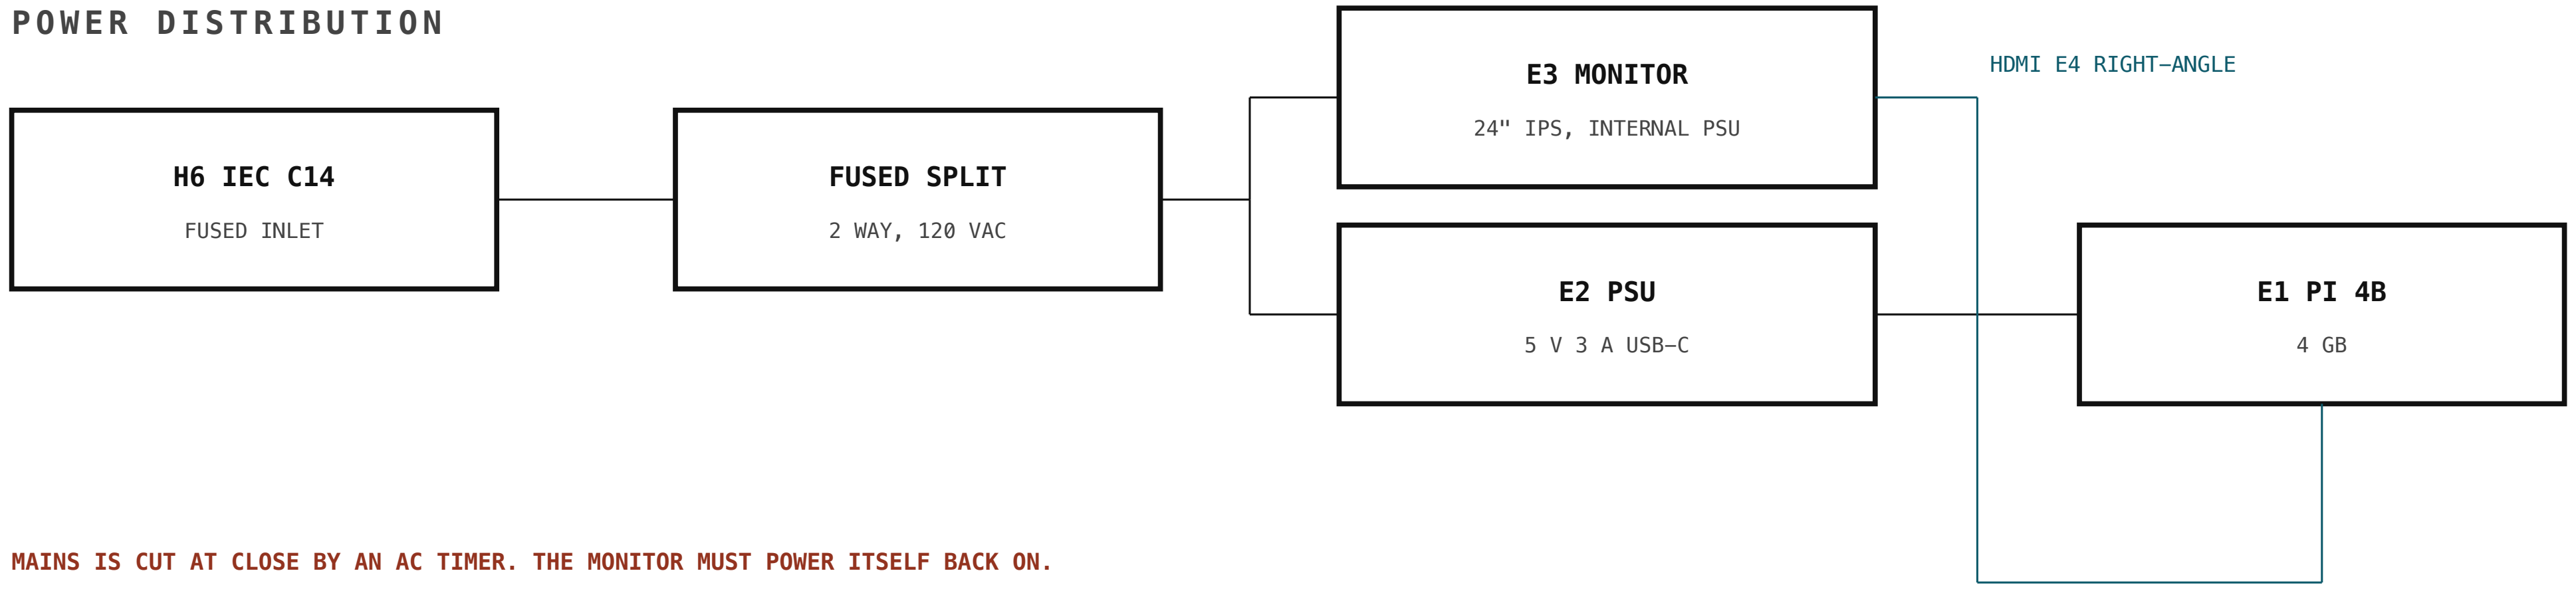

MAINS IS CUT AT CLOSE BY AN AC TIMER. THE MONITOR MUST POWER ITSELF BACK ON.

TEST BEFORE PURCHASE: SWITCHED STRIP, KILL POWER, RESTORE, CONFIRM IT COMES BACK WITH NO INPUT.

CONTROL WIRING

BUTTON CIRCUIT

THREE SPST–NO MOMENTARY SWITCHES, EACH ONE LEG TO A GPIO AND ONE LEG TO A COMMON GROUND RETURN. NO EXTERNAL PULL–UPS — ENABLE THE PI INTERNAL PULL–UPS IN SOFTWARE.

WIRE 22 AWG STRANDED. LEAVE 6 INCHES OF SLACK AT EACH SWITCH SO THE PI TRAY CAN SLIDE OUT WITHOUT UNPLUGGING. STRAIN–RELIEVE THE LOOM TO P7 BUTTON RAIL.

IF THE SWITCHES ARE ILLUMINATED, THE LED LEG IS SEPARATE — FEED IT FROM 3V3 THROUGH A RESISTOR, NOT FROM THE GPIO.

GPIO ASSIGNMENT MUST MATCH src/controller/. CHANGE ONE, CHANGE BOTH.

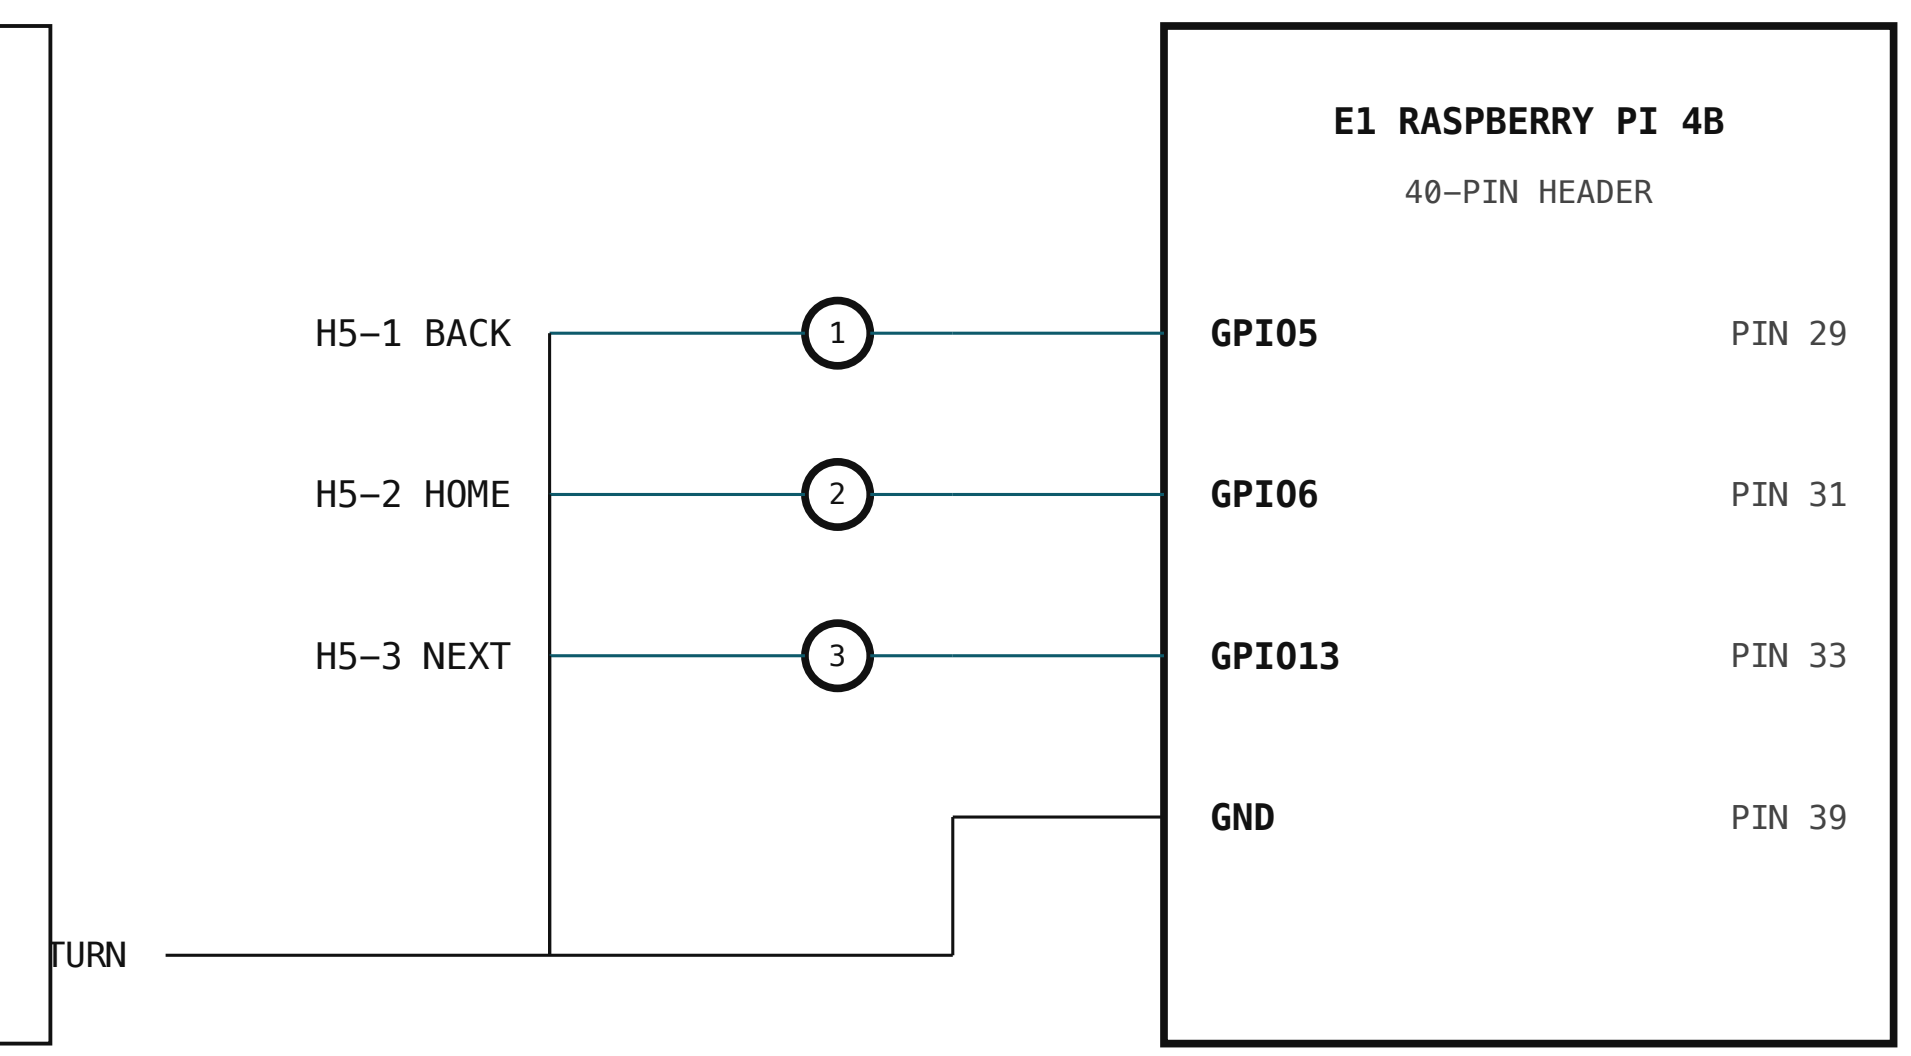

3280 KIOSK · REV 1 STANDALONE		VINTAGE COMPUTER FEDERATION · INFOAGE
ELECTRICAL	DWG NO 500	REV A
CONCEPT — NOT RELEASED FOR PRODUCTION	SCALE NTS	SHEET 10 OF 12
DRAWN CLAUDE / N. DEMARCO	MATERIAL —	FINISH —
DATE 2026–08–28	UNITS INCHES	PROJECTION THIRD ANGLE

01 PREPARE THE PANELS

Cut P2, P3, P4, P9, P10 to size. Sand to 180. Seal and paint every internal surface satin black before assembly — bare ply reflects through the window.

02 BUILD THE BOX

Glue and screw P2 sides to P3 top and bottom, item 17, 4 per joint, pilot drilled. Clamp square: measure both diagonals, within 0.06 of each other.

03 FIT THE CLEATS

Glue P5 vertical cleats flush with the front edge, then P6 between them. Glue P7 button rail with its centreline 23.715 below the top of the box. Glue P8 rear cleats set back 0.750 from the rear edge.

04 SET THE THREADED INSERTS

Clamp P1 to the front. Spot through all 15 holes. Remove P1, drill for item 11 and set the inserts. Do not skip the clamp-and-spot — the holes must match, not merely measure.

05 MOUNT THE VESA RAILS

Fit P9 rails at X = 5.716 and 9.654 from the left edge. Glue and screw to P3 top and bottom. Leave the monitor bolts loose for now.

06 HANG THE MONITOR

Bolt the monitor to P9 with item 14, finger tight. Temporarily fit P1 and sight the active area through the window. Slide the monitor until the margin is even all round, then torque item 14. Shim behind P9 if the panel face is not 0.100 behind P1.

07 FIT THE SWITCHES

Item 15 into the three ⌀1.2008 holes in P1 from the front. Nut from behind. Do not overtighten — ACM will dimple.

08 WIRE

Per sheet 500. Common return to one GND pin. Leave 6 in of slack at each switch. Strain-relieve the loom to P7.

09 FIT THE PI AND POWER

P10 tray into the bay on its cleats. Pi on M2.5 standoffs. H6 inlet in the lower rear. Route HDMI and DC downward with right-angle plugs — straight plugs will not fit.

10 CLOSE UP

Fit P1 with item 12. Torque to seat only. Fit P4 with item 13. Apply the BACK / HOME / NEXT vinyl legends, centred under each button.

11 BENCH TEST — ONE WEEK

Run the complete kiosk on a table. Confirm: all three buttons, boot to the app unattended, and recovery from a mains cut with no human input. Do not skip the week.

12 ONLY THEN — MOUNT

Design and build the reversible adapter. Total projection from the door face ≤ 4.000. No fastener enters the 3280.

3280 KIOSK · REV 1 STANDALONE		VINTAGE COMPUTER FEDERATION · INFOAGE
ASSEMBLY SEQUENCE	DWG NO 600	REV A
CONCEPT — NOT RELEASED FOR PRODUCTION	SCALE NTS	SHEET 11 OF 12
DRAWN CLAUDE / N. DEMARCO	MATERIAL ASSEMBLY	FINISH —
DATE 2026-08-28	UNITS INCHES	PROJECTION THIRD ANGLE

INSPECTION DIMENSIONS

Check these before the kiosk leaves the bench. Anything out of tolerance here shows up on the machine.

#	FEATURE	NOMINAL	TOLERANCE	METHOD	WHY IT MATTERS
1	P1 OVERALL	15.370 x 28.690	± 0.030	TAPE / CALIPER	SUPPLIER CUT — SPOT CHECK ONLY
2	P1 WINDOW	12.170 x 21.240	± 0.030	CALIPER	MUST NOT CROP THE ACTIVE AREA
3	**BUTTON CENTRELINE BELOW TOP EDGE**	25.440	± 0.030	TAPE FROM DATUM -B-	SETS ADA HEIGHT — CRITICAL
4	BUTTON PITCH	3.500	± 0.020	CALIPER	—
5	BUTTON CUTOUT	⌀1.2008	+0.010 / −0.000	PIN / CALIPER	VERIFY AGAINST SWITCH DATASHEET
6	BOX DIAGONALS, FRONT OPENING	EQUAL	WITHIN 0.060	TAPE, CORNER TO CORNER	SQUARENESS
7	OVERALL DEPTH, ASSEMBLED	3.250	± 0.040	CALIPER AT 4 CORNERS	FEEDS THE 4.000 §307.2 BUDGET
8	P1 FLUSH TO BOX EDGE	0.000	± 0.020	STRAIGHTEDGE	NO PROUD EDGE TO CATCH
9	MONITOR MARGIN IN WINDOW	EVEN ALL ROUND	± 0.060	EYE + RULE	ADJUST AT P9 SLOTS
10	SERVICE AIR, MONITOR TO P4	0.732 MIN	MIN	DEPTH GAUGE	CABLE BEND CLEARANCE
11	ALL 15 FIXINGS ENGAGE	15 OF 15	—	BY HAND	NO STRIPPED INSERT
12	P4 REMOVES AND REFITS	—	—	BY HAND	WITHOUT TOOLS OR LOOSE PARTS

GO / NO-GO ON THE MONITOR

1. IT MUST POWER ITSELF BACK ON AFTER A MAINS CUT.
The exhibit is on an AC timer. Many monitors return to standby
and need a button press — that is a black screen every morning.
Test: switched strip, kill power, restore, confirm it comes back
with no input. This is go / no-go, not a preference.
2. MATTE ONLY. Overhead lights and daylight; glossy panels mirror them.

SIGN-OFF

INSPECTED BY ______________________

DATE ______________________

BENCH TEST START ______________________

BENCH TEST END ______________________

RELEASED TO INSTALL ______________________

3280 KIOSK · REV 1 STANDALONE		VINTAGE COMPUTER FEDERATION · INFOAGE
INSPECTION	DWG NO 700	REV A
CONCEPT — NOT RELEASED FOR PRODUCTION	SCALE NTS	SHEET 12 OF 12
DRAWN CLAUDE / N. DEMARCO	MATERIAL —	FINISH —
DATE 2026-08-28	UNITS INCHES	PROJECTION THIRD ANGLE