



Control System Overview

B1.1.00


Power

12VDC Main



Data

22 AWG Minimum




Wire Gauge

Minimum Gauge per connection shown



I/O

Connector Interfaces

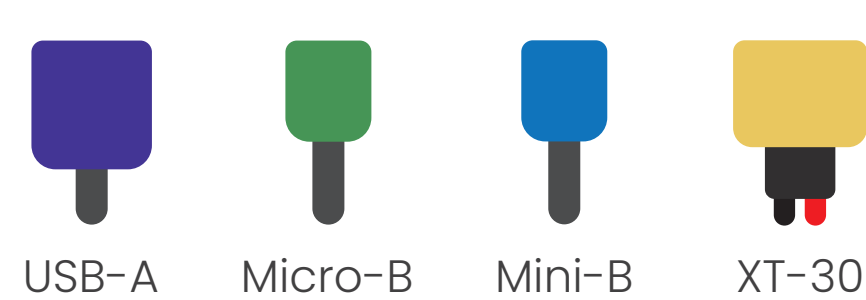

* SIG1 and SIG2 are utilized differently depending on the communication protocol used in a specific connection.

Learn more about each protocol's pinouts and the FTC control system at:

ftc-docs.firstinspires.org

Keep in Mind

B1 – REV Control Hub Configuration – Basic

