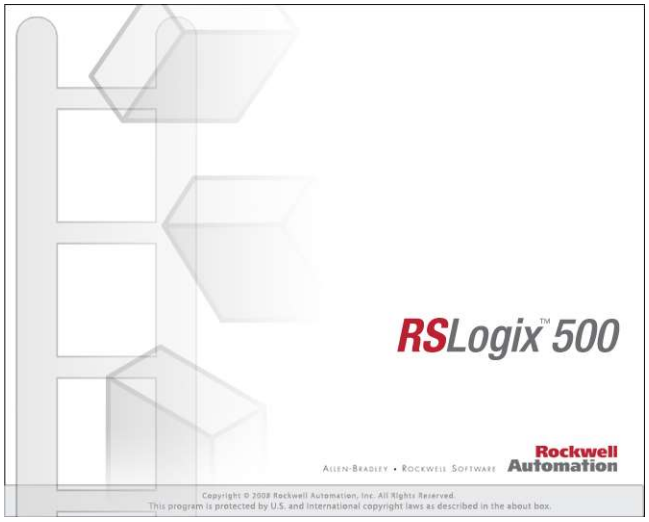
RSLogix Micro Project Report



Processor Information

Processor Type: Bul.1763 MicroLogix 1100 Series B

Processor Name: UNTITLED

Total Memory Used: 350 Instruction Words Used - 108 Data Table Words Used

Total Memory Left: 6306 Instruction Words Left

Program Files: 7

Data Files: 11

Program ID: ba17

I/O Configuration

0	Bul.1763	MicroLogix 1100 Series B
1	1762-IQ8	8-Input 10/30 VDC
2	1762-OA8	8-Output 120/240 VAC
3	1762-IF2OF2	Analog 2 Chan. Input, 2 Chan. Output
4		

Channel Configuration

CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Edit Resource/Owner Timeout: 60
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Passthru Link ID: 1
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Write Protected: No
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Comms Servicing Selection: Yes
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex Message Servicing Selection: Yes
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex 1st AWA Append Character: \d
   CHANNEL 0 (SYSTEM) - Driver: DF1 Full Duplex 2nd AWA Append Character: \a

   Source ID: 1 (decimal)
   Baud: 19200
   Parity: NONE
   Control Line : No Handshaking
   Error Detection: CRC
   Embedded Responses: Auto Detect
   Duplicate Packet Detect: Yes
   ACK Timeout(x20 ms): 50
   NAK Retries: 3
   ENQ Retries: 3

CHANNEL 1 (SYSTEM) - Driver: Ethernet
   CHANNEL 1 (SYSTEM) - Driver: Ethernet Edit Resource/Owner Timeout: 60
   CHANNEL 1 (SYSTEM) - Driver: Ethernet Passthru Link ID: 1
   CHANNEL 1 (SYSTEM) - Driver: Ethernet Write Protected: No
   CHANNEL 1 (SYSTEM) - Driver: Ethernet Comms Servicing Selection: Yes
   CHANNEL 1 (SYSTEM) - Driver: Ethernet Message Servicing Selection: Yes

   Hardware Address: 00:00:00:00:00:00
   IP Address: 0.0.0.0
   Subnet Mask: 0.0.0.0
   Gateway Address: 0.0.0.0
   Msg Connection Timeout (x 1mS): 15000
   Msg Reply Timeout (x mS): 3000
   Inactivity Timeout (x Min): 30
   Bootp Enable: Yes
   Dhcp Enable No
   SNMP Enable: No
   HTTP Enable: Yes
   Auto Negotiate Enable: Yes
   Port Speed Enable: 10/100 Mbps Full Duplex/Half Duplex
   Contact:
   Location:

Program File List

Name	Number	Type	Rungs	Debug	Bytes
[SYSTEM]	0	SYS	0	No	0
	1	SYS	0	No	0
MAIN	2	LADDER	5	No	39
IO	3	LADDER	18	No	449
CONTROLS	4	LADDER	10	No	671
ALARMS	5	LADDER	4	No	123
SIMULATION	6	LADDER	1	No	3

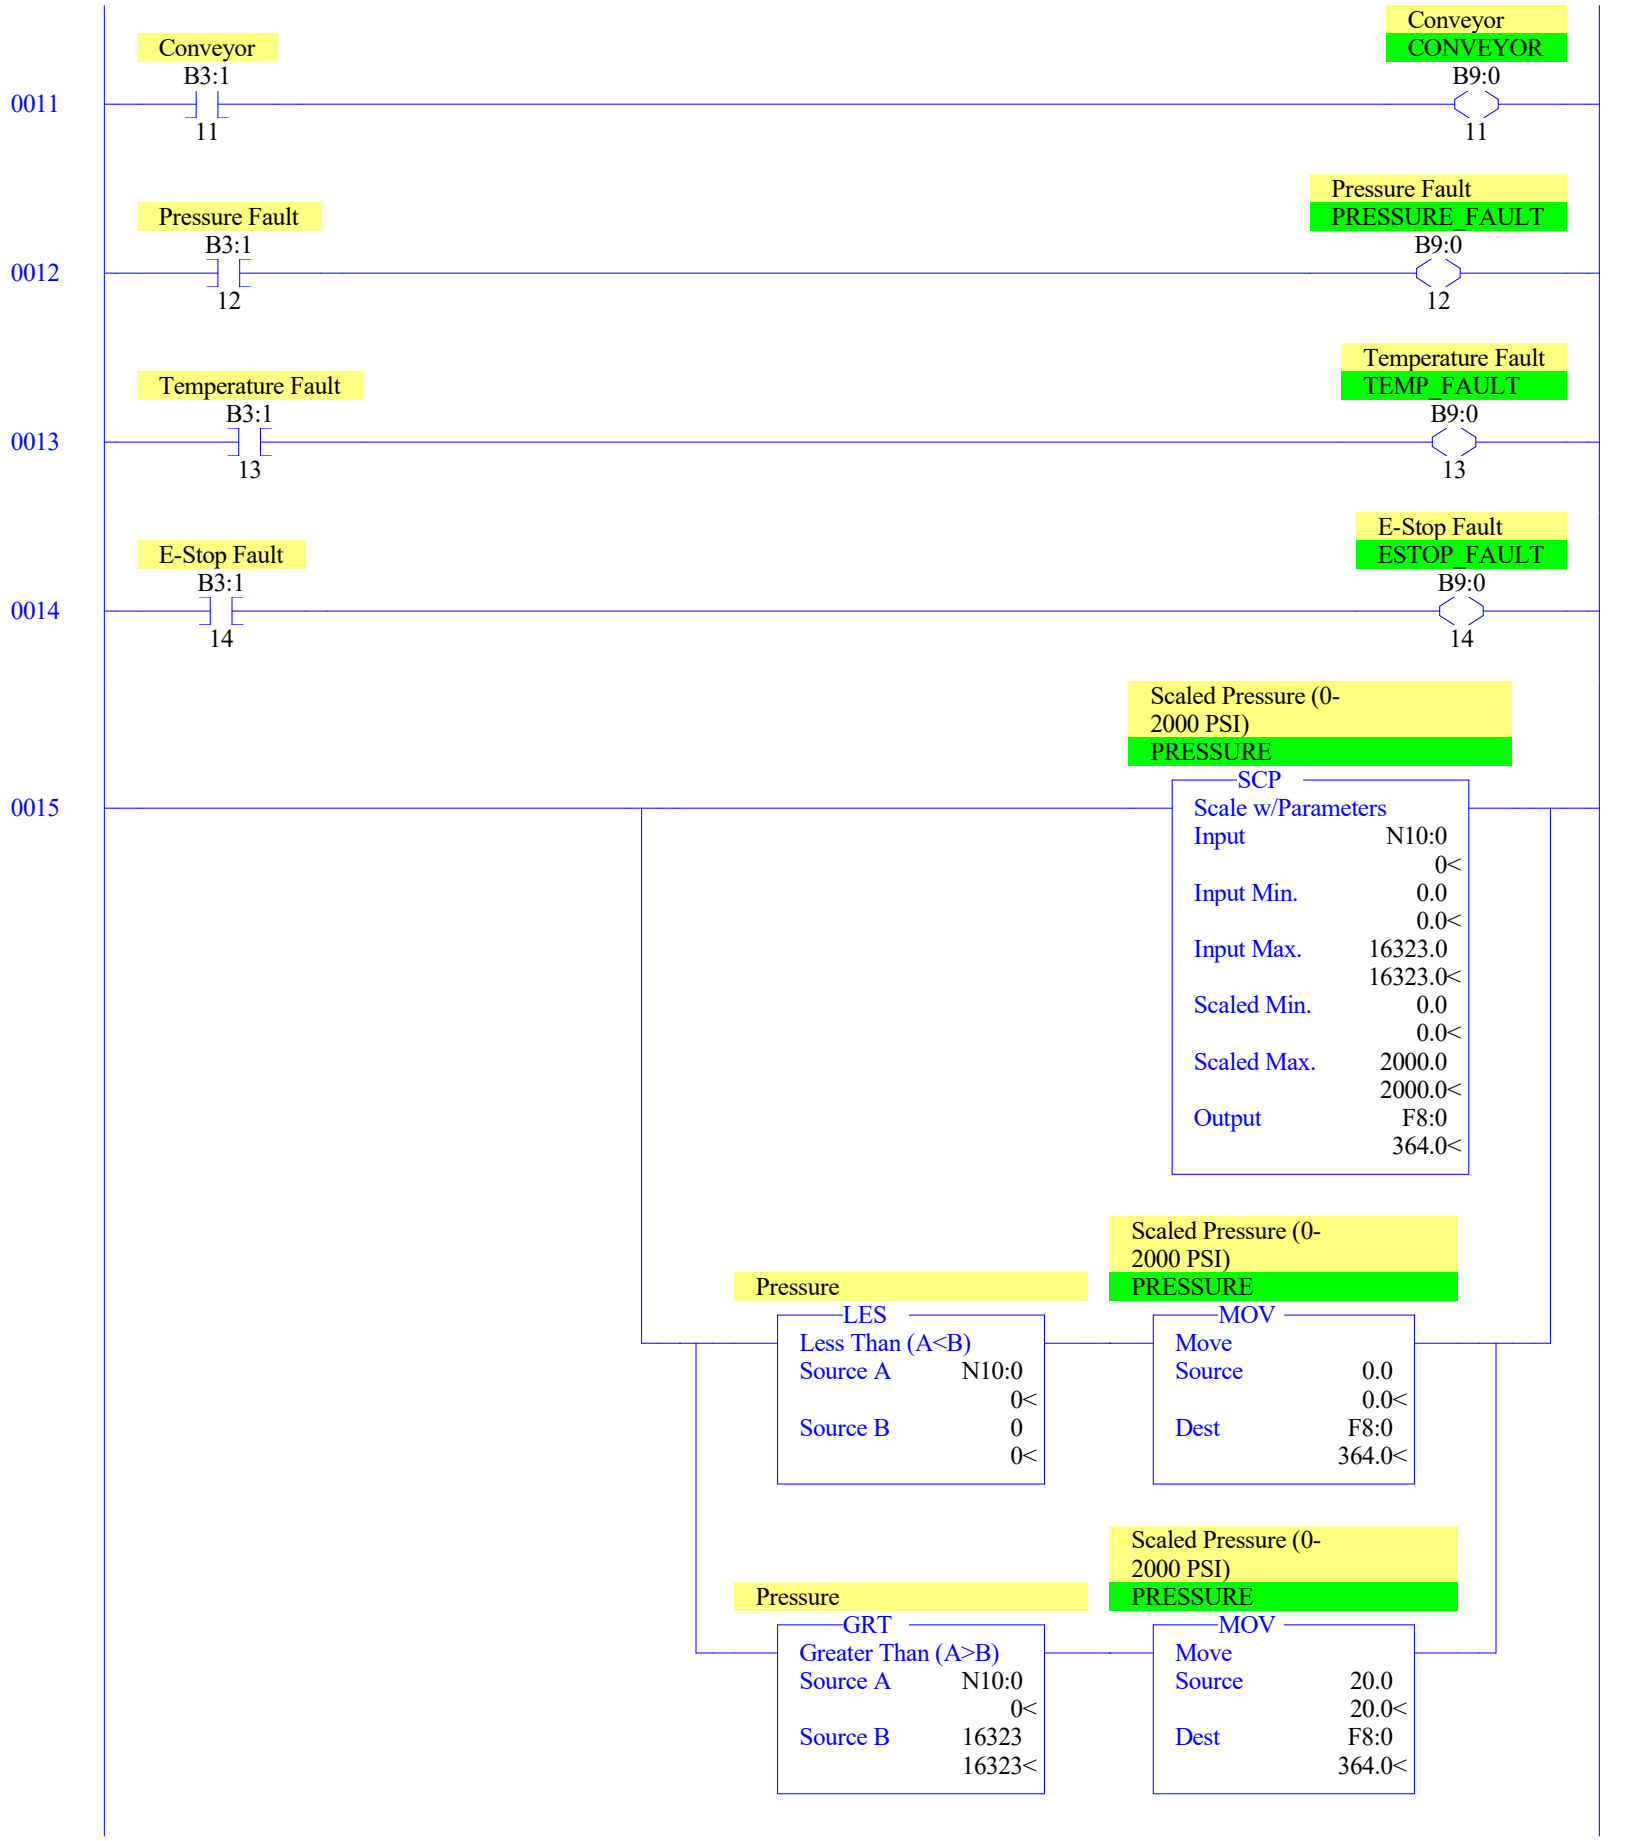
Data File List

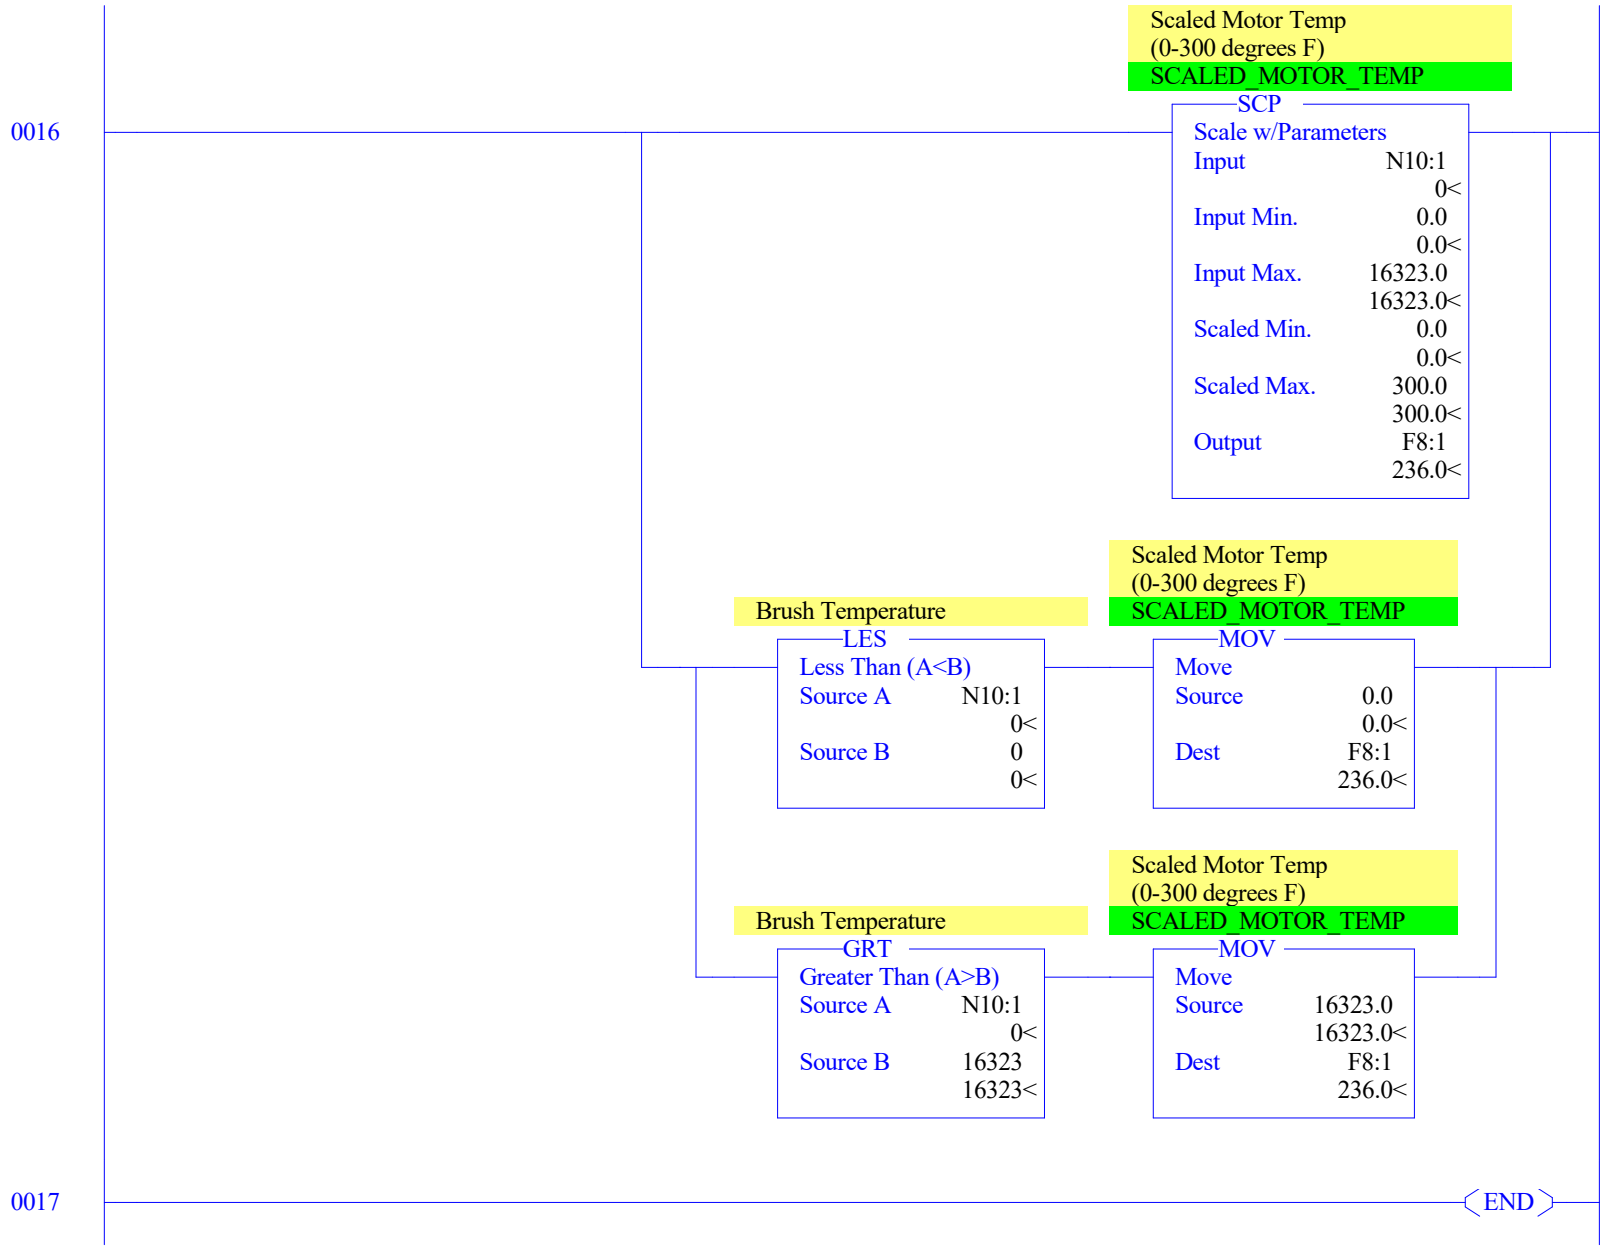
Name	Number	Type	Scope	Debug	Words	Elements	Last
OUTPUT	0	O	Global	No	21	7	O:6
INPUT	1	I	Global	No	39	13	I:12
STATUS	2	S	Global	No	0	66	S:65
BINARY	3	B	Global	No	2	2	B3:1
TIMER	4	T	Global	No	27	9	T4:8
COUNTER	5	C	Global	No	3	1	C5:0
CONTROL	6	R	Global	No	3	1	R6:0
INTEGER	7	N	Global	No	1	1	N7:0
FLOAT	8	F	Global	No	6	3	F8:2
DIGITAL IO	9	B	Global	No	2	2	B9:1
ANALOG IO	10	N	Global	No	4	4	N10:3

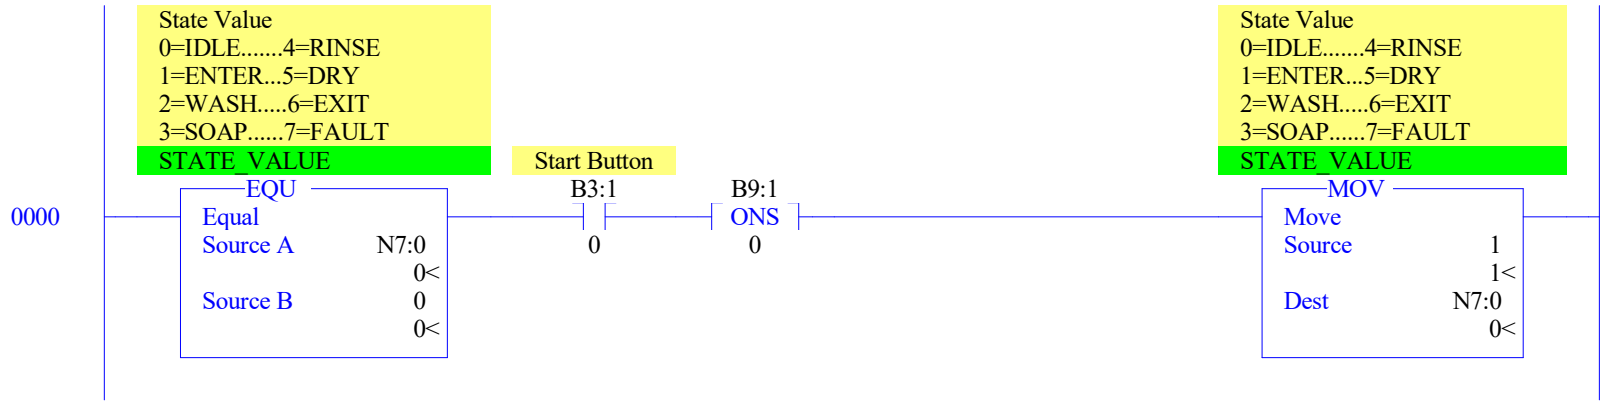
LAD 2 - MAIN --- Total Rungs in File = 5

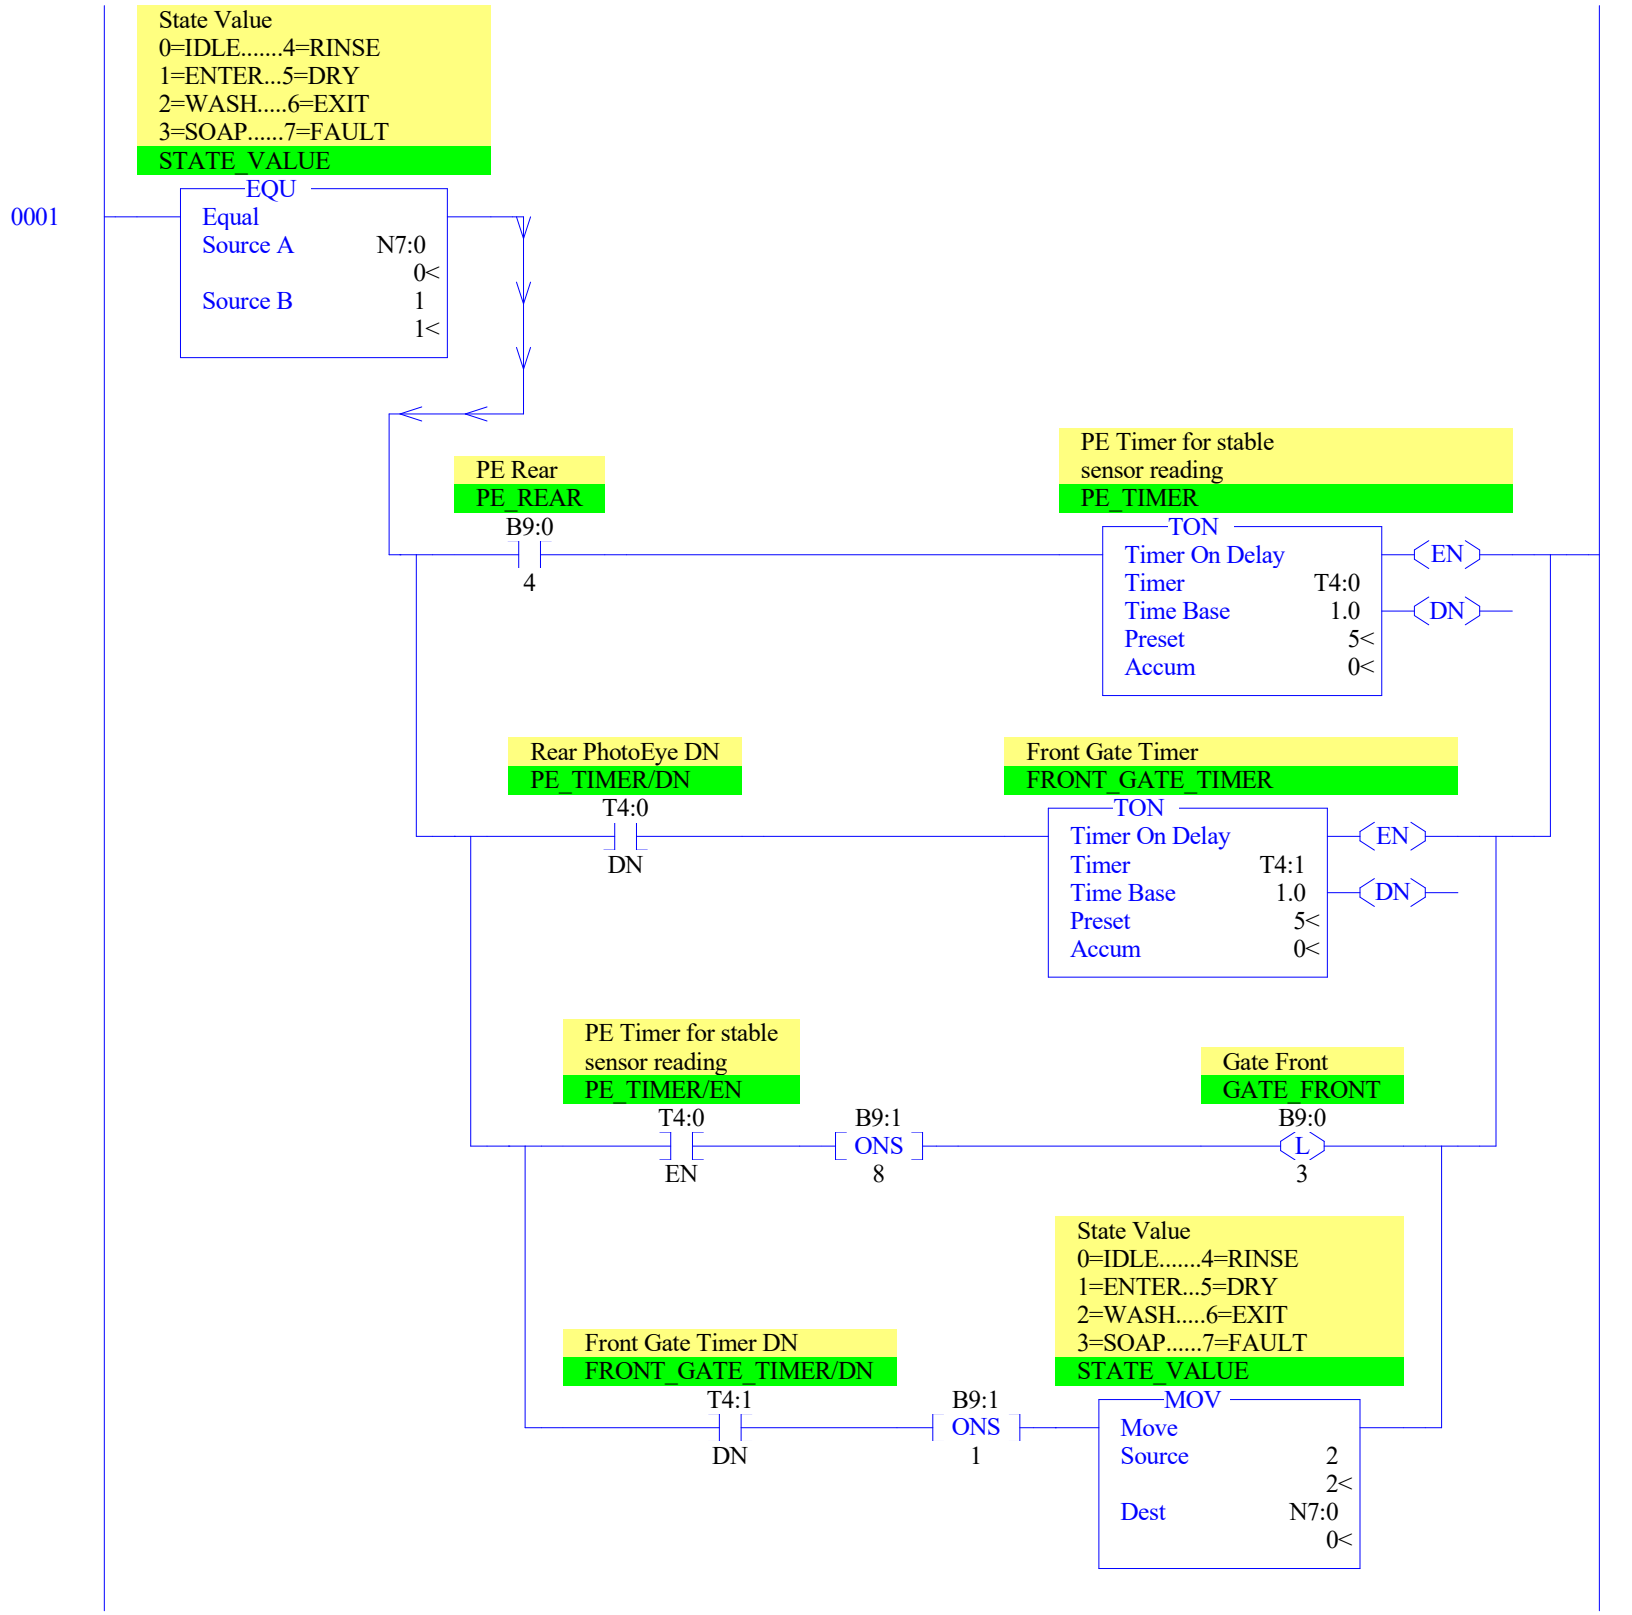


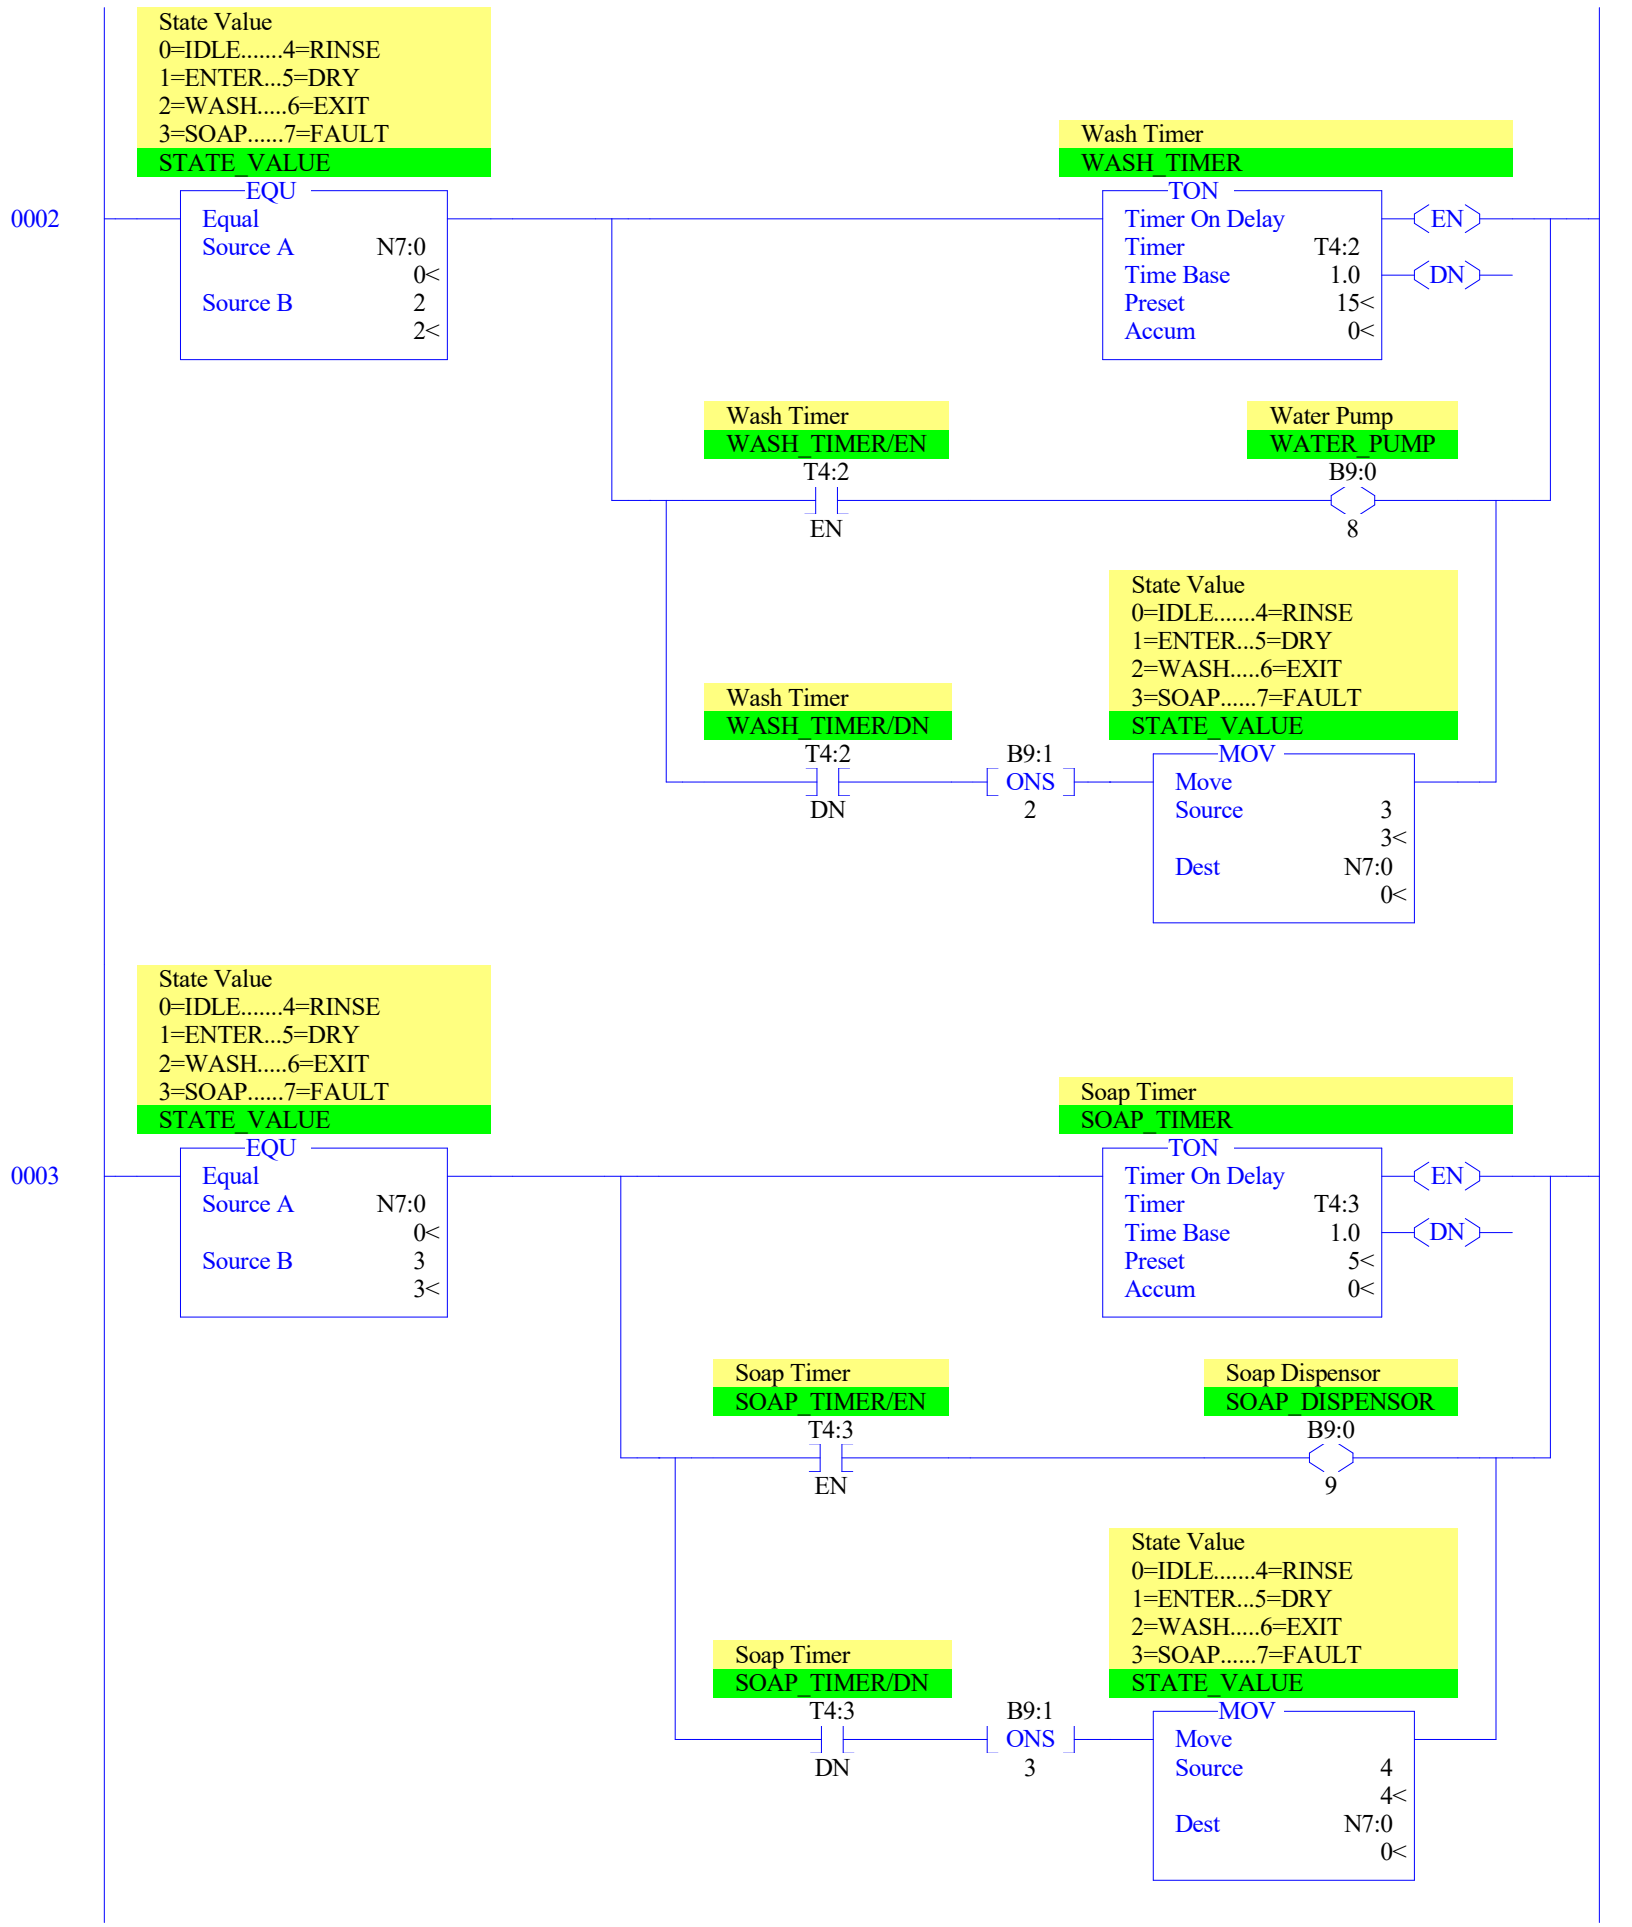

0000
Start Button
B3:1
0
PB Start
PB_START
B9:0
0
0001
Stop Button
B3:1
1
PB Stop
PB_STOP
B9:0
1
0002
E-Stop
B3:1
2
E-Stop
E_STOP
B9:0
2
0003
Front Gate Sensor
B3:1
3
Gate Front
GATE_FRONT
B9:0
3
0004
Rear PhotoEye
B3:1
4
PE Rear
PE_REAR
B9:0
4
0005
Water Pressure Fault Reset
WTR_PRSSR_FAULT_RST
B3:1
5
PSW Water Pressure
PWS_WATER_PRESSURE
B9:0
5
0006
Motor Temp Fault Reset
MOTR_TEMP_FAULT_RST
B3:1
6
Overtemp
OVERTEMP
B9:0
6
0007
Emergency Reset Button
E_RST_BUTTON
B3:1
7
Emergency Reset
EMERGENCY_RESET
B9:0
7
0008
Water Pump
B3:1
8
Water Pump
WATER_PUMP
B9:0
8
0009
Soap Dispensor
B3:1
9
Soap Dispensor
SOAP_DISPENSOR
B9:0
9
0010
Dryer
B3:1
10
Dryer
DRYER
B9:0
10

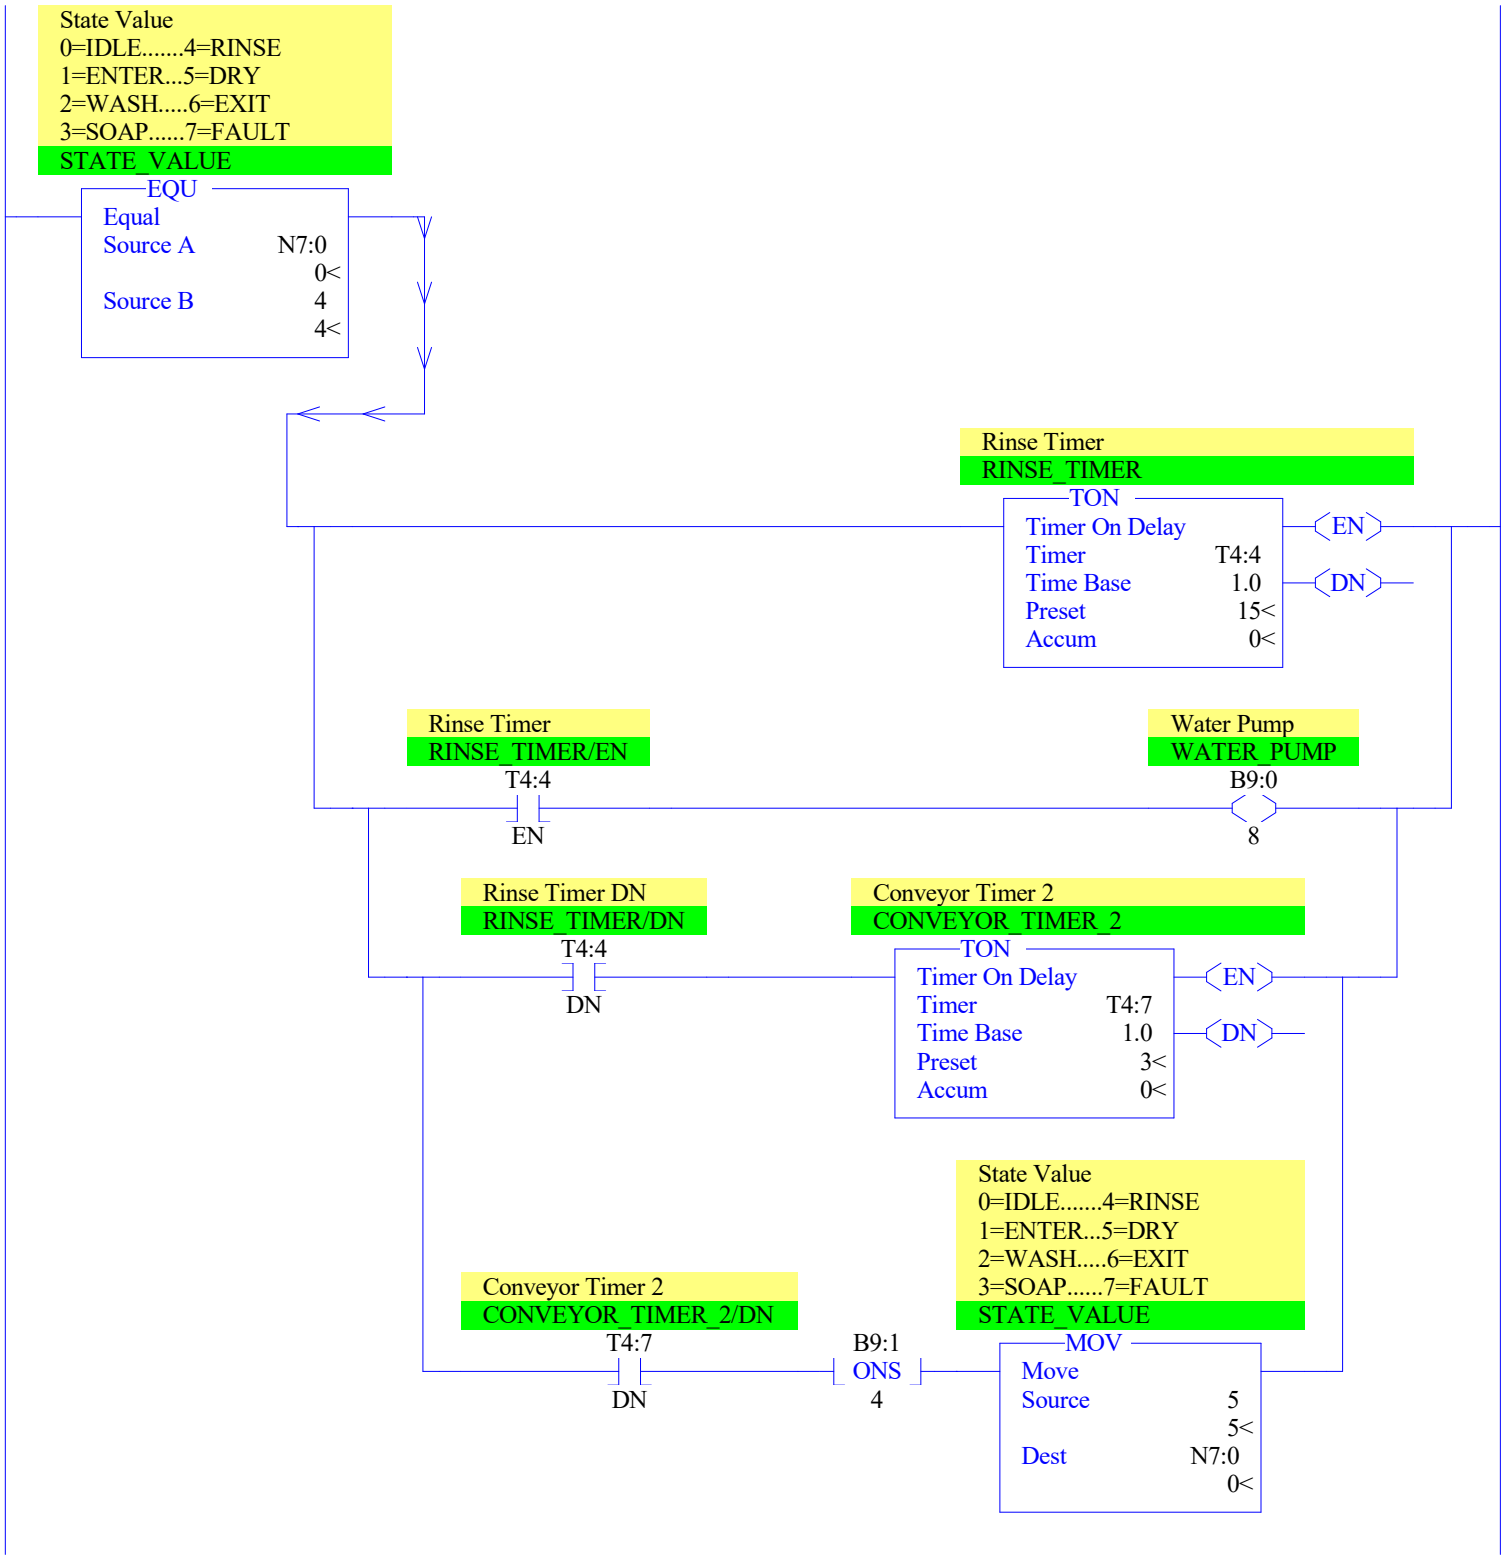

0011
Conveyor
B3:1
11
Conveyor
CONVEYOR
B9:0
11
0012
Pressure Fault
B3:1
12
Pressure Fault
PRESSURE_FAULT
B9:0
12
0013
Temperature Fault
B3:1
13
Temperature Fault
TEMP_FAULT
B9:0
13
0014
E-Stop Fault
B3:1
14
E-Stop Fault
ESTOP_FAULT
B9:0
14
0015
Scaled Pressure (0-2000 PSI)
PRESSURE
SCP
Scale w/Parameters
Input N10:0 0<
Input Min. 0.0 0.0<
Input Max. 16323.0 16323.0<
Scaled Min. 0.0 0.0<
Scaled Max. 2000.0 2000.0<
Output F8:0 364.0<
Pressure
LES
Less Than (A<B)
Source A N10:0 0<
Source B 0 0<
Scaled Pressure (0-2000 PSI)
PRESSURE
MOV
Move
Source 0.0 0.0<
Dest F8:0 364.0<
Pressure
GRT
Greater Than (A>B)
Source A N10:0 0<
Source B 16323 16323<
Scaled Pressure (0-2000 PSI)
PRESSURE
MOV
Move
Source 20.0 20.0<
Dest F8:0 364.0<

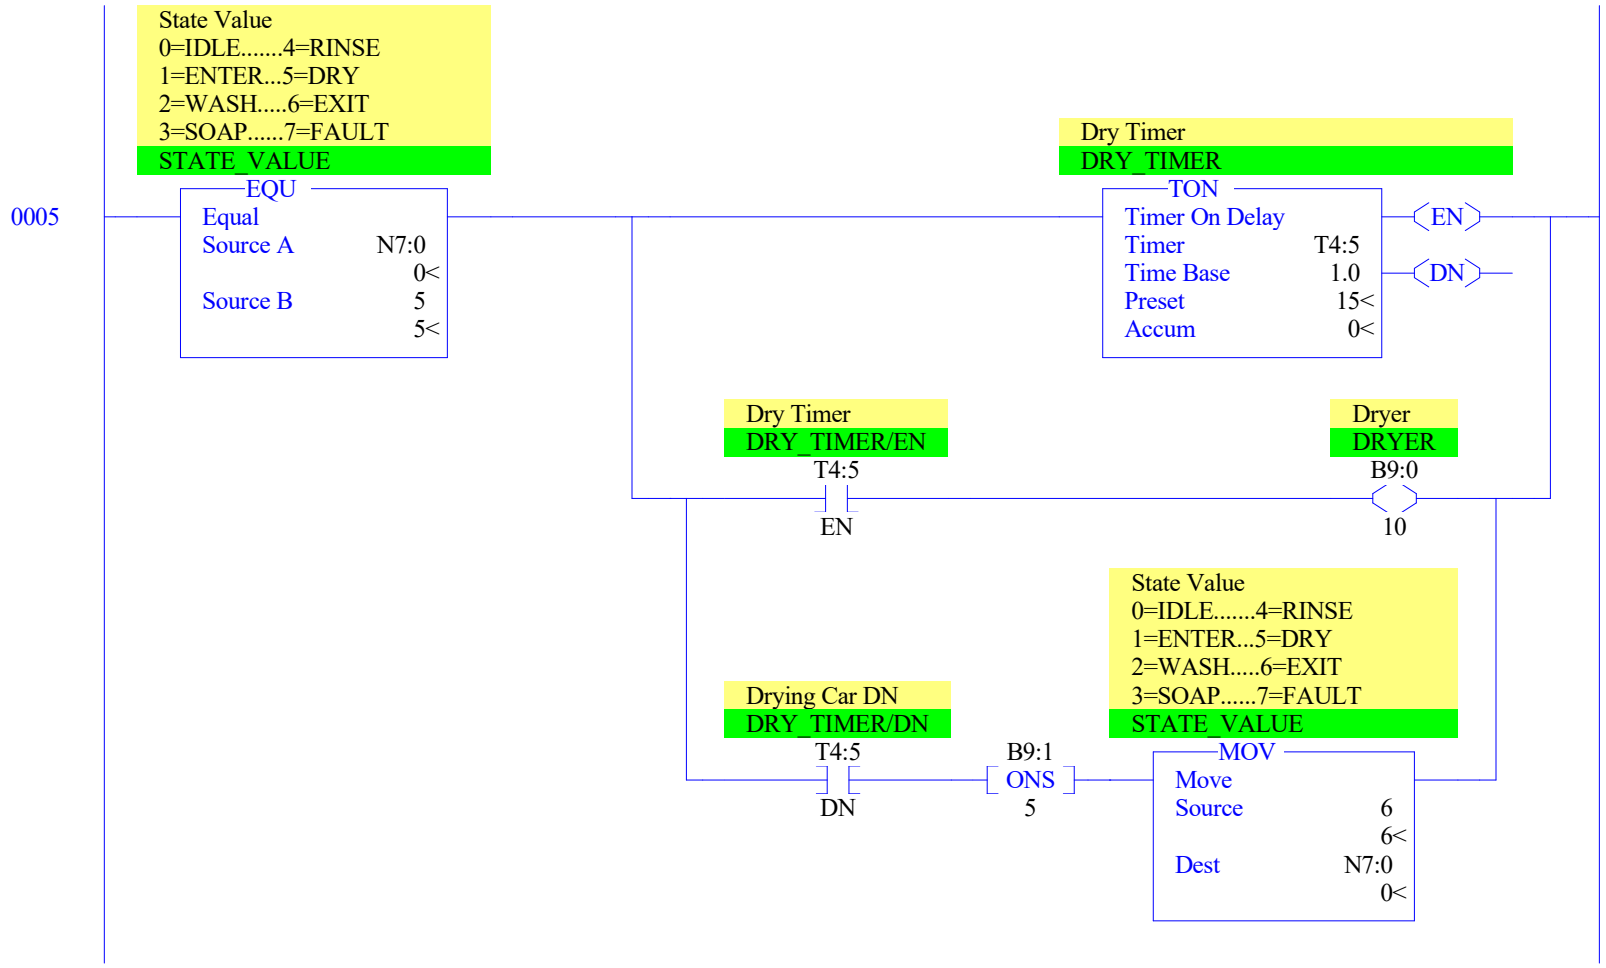

Scaled Motor Temp
(0-300 degrees F)
SCALED_MOTOR_TEMP
0016
SCP
Scale w/Parameters
Input N10:1
0<
Input Min. 0.0
0.0<
Input Max. 16323.0
16323.0<
Scaled Min. 0.0
0.0<
Scaled Max. 300.0
300.0<
Output F8:1
236.0<
Scaled Motor Temp
(0-300 degrees F)
SCALED_MOTOR_TEMP
Brush Temperature
LES
Less Than (A<B)
Source A N10:1
0<
Source B 0
0<
MOV
Move
Source 0.0
0.0<
Dest F8:1
236.0<
Scaled Motor Temp
(0-300 degrees F)
SCALED_MOTOR_TEMP
Brush Temperature
GRT
Greater Than (A>B)
Source A N10:1
0<
Source B 16323
16323<
MOV
Move
Source 16323.0
16323.0<
Dest F8:1
236.0<
0017
END

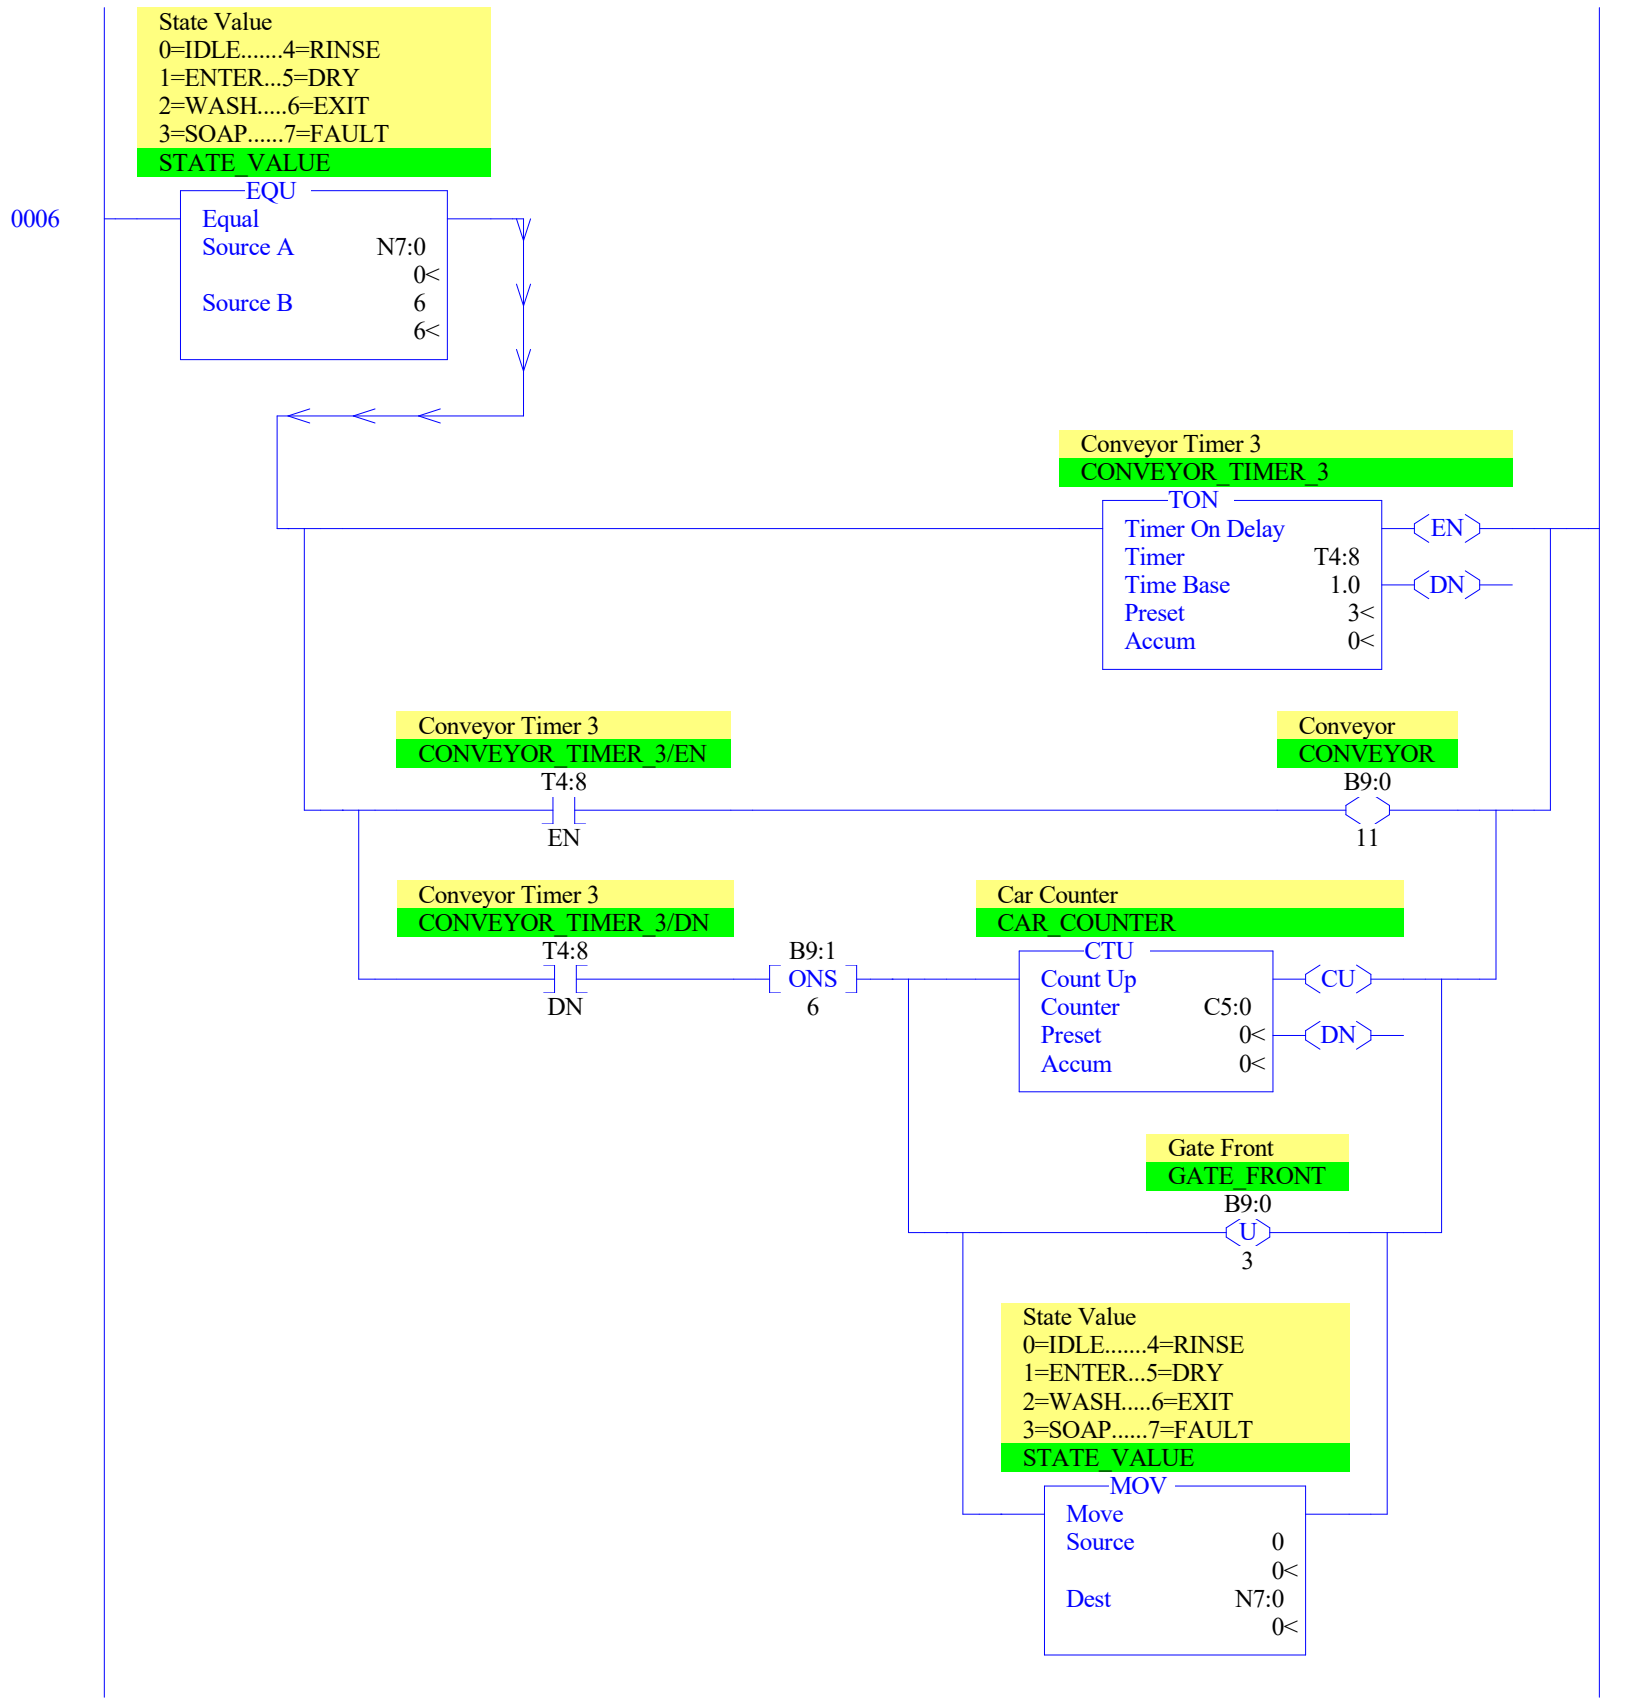

State Value
0=IDLE.....4=RINSE
1=ENTER...5=DRY
2=WASH.....6=EXIT
3=SOAP.....7=FAULT
STATE_VALUE
Start Button
B3:1
0
B9:1
ONS
0
State Value
0=IDLE.....4=RINSE
1=ENTER...5=DRY
2=WASH.....6=EXIT
3=SOAP.....7=FAULT
STATE_VALUE
0000
EQU
Equal
Source A N7:0
0<
Source B 0
0<
MOV
Move
Source 1
1<
Dest N7:0
0<

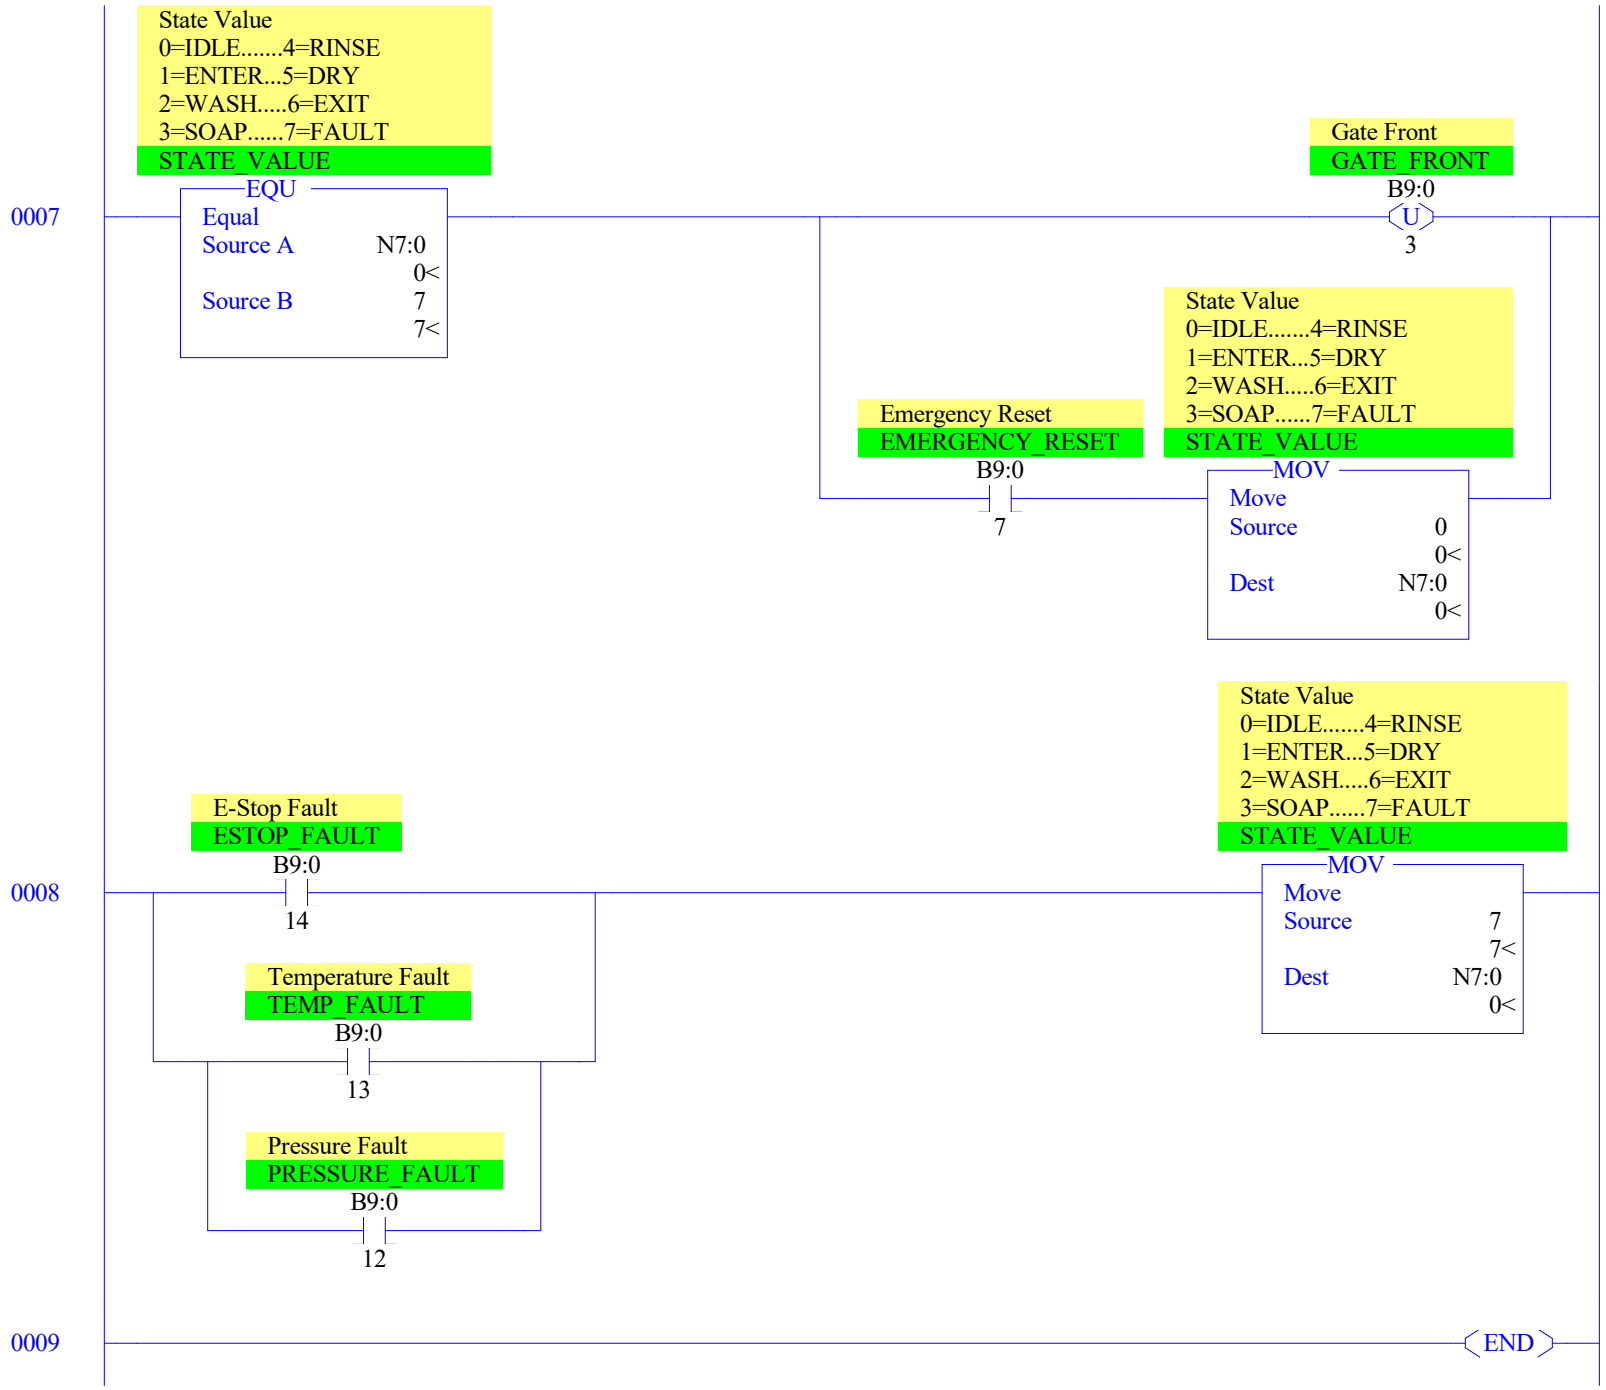

State Value
0=IDLE.....4=RINSE
1=ENTER...5=DRY
2=WASH.....6=EXIT
3=SOAP.....7=FAULT
STATE_VALUE
0001
EQU
Equal
Source A N7:0
0<
Source B 1
1<
PE Rear
PE_REAR
B9:0
4
PE Timer for stable sensor reading
PE_TIMER
TON
Timer On Delay
Timer T4:0
Time Base 1.0
Preset 5<
Accum 0<
EN
DN
Rear PhotoEye DN
PE_TIMER/DN
T4:0
DN
Front Gate Timer
FRONT_GATE_TIMER
TON
Timer On Delay
Timer T4:1
Time Base 1.0
Preset 5<
Accum 0<
EN
DN
PE Timer for stable sensor reading
PE_TIMER/EN
T4:0
EN
B9:1
ONS
8
Gate Front
GATE_FRONT
B9:0
L
3
State Value
0=IDLE.....4=RINSE
1=ENTER...5=DRY
2=WASH.....6=EXIT
3=SOAP.....7=FAULT
STATE_VALUE
Front Gate Timer DN
FRONT_GATE_TIMER/DN
T4:1
DN
B9:1
ONS
1
MOV
Move
Source 2
2<
Dest N7:0
0<

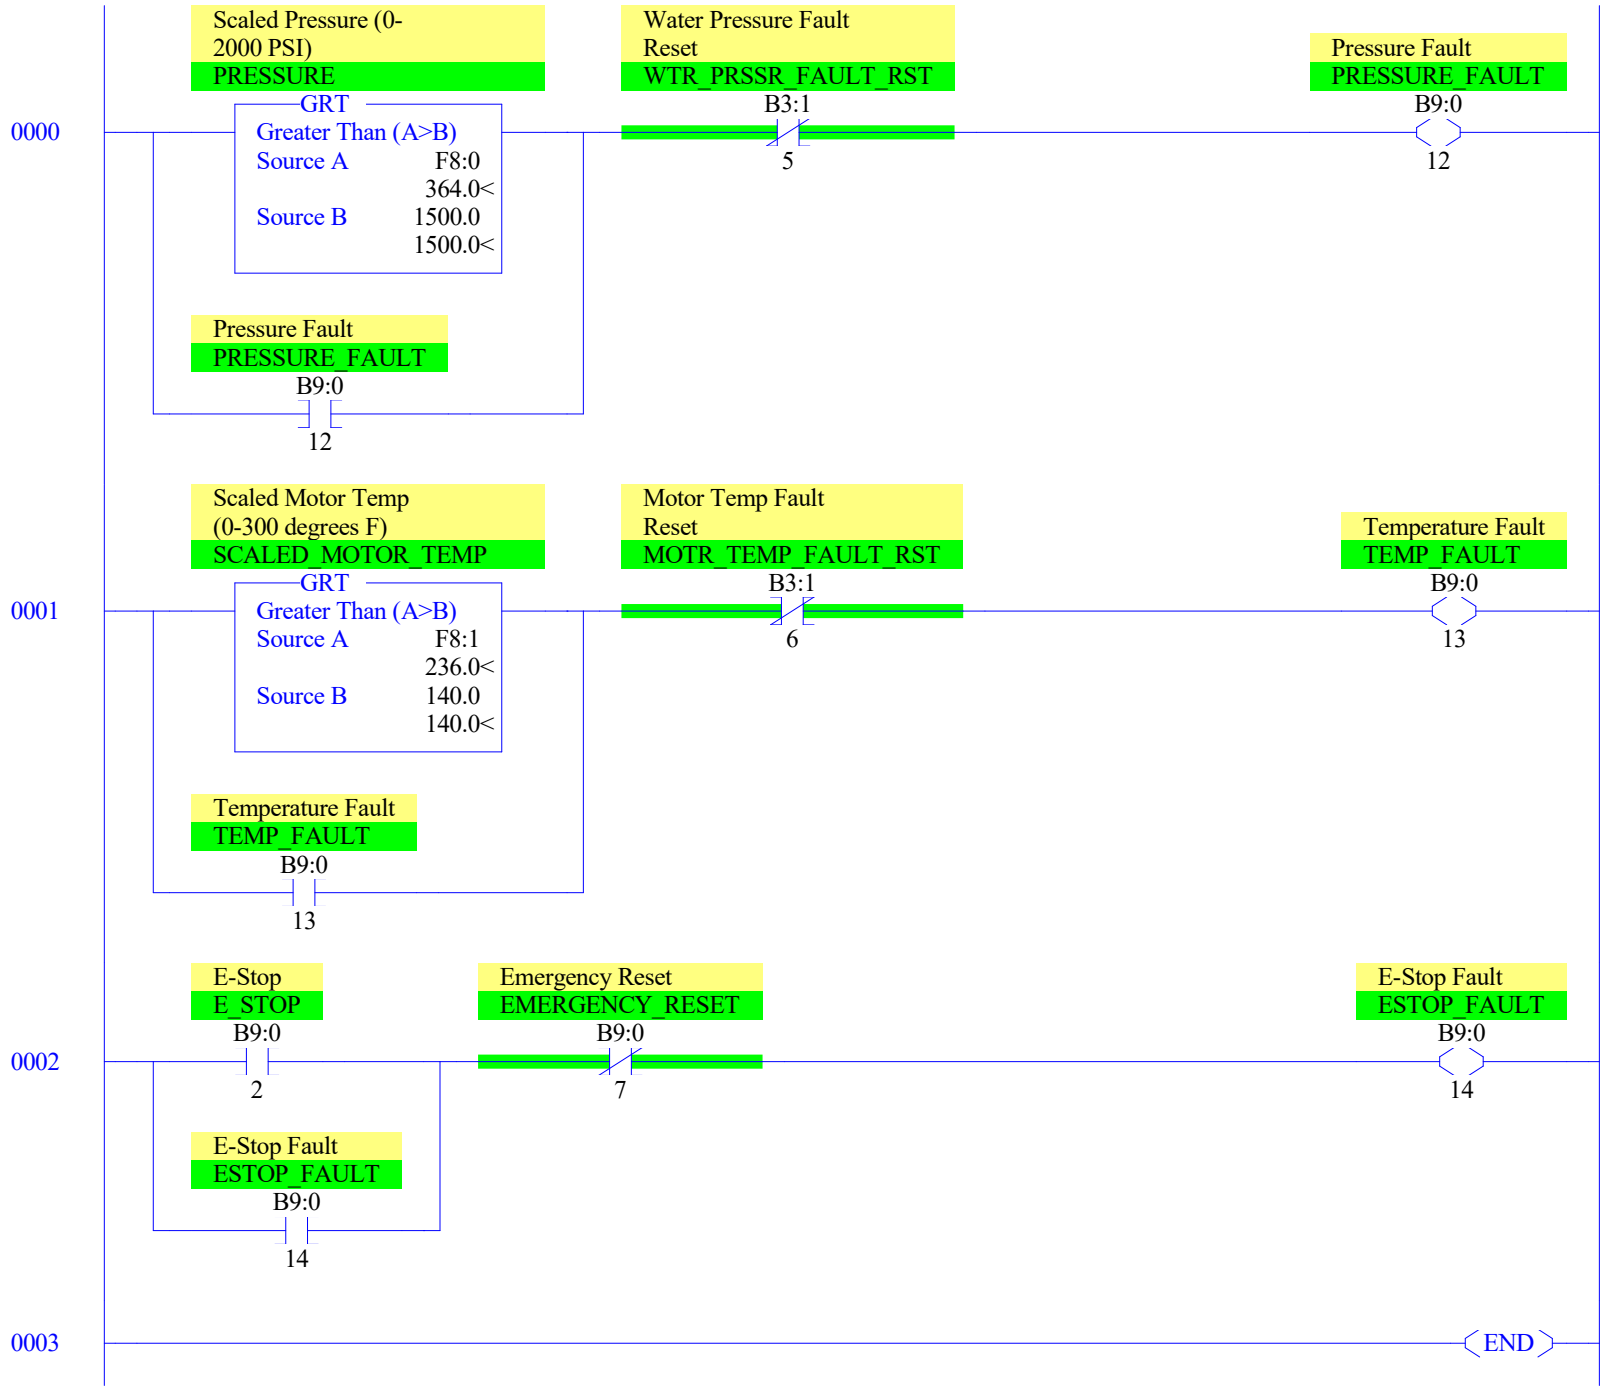

State Value
0=IDLE.....4=RINSE
1=ENTER...5=DRY
2=WASH.....6=EXIT
3=SOAP.....7=FAULT
STATE_VALUE
0002
EQU
Equal
Source A N7:0 0<
Source B 2 2<
Wash Timer
WASH_TIMER
TON
Timer On Delay
Timer T4:2
Time Base 1.0
Preset 15<
Accum 0<
EN
DN
Wash Timer
WASH_TIMER/EN
T4:2
EN
Water Pump
WATER_PUMP
B9:0
8
State Value
0=IDLE.....4=RINSE
1=ENTER...5=DRY
2=WASH.....6=EXIT
3=SOAP.....7=FAULT
STATE_VALUE
Wash Timer
WASH_TIMER/DN
T4:2
DN
B9:1
ONS
2
MOV
Move
Source 3 3<
Dest N7:0 0<
State Value
0=IDLE.....4=RINSE
1=ENTER...5=DRY
2=WASH.....6=EXIT
3=SOAP.....7=FAULT
STATE_VALUE
0003
EQU
Equal
Source A N7:0 0<
Source B 3 3<
Soap Timer
SOAP_TIMER
TON
Timer On Delay
Timer T4:3
Time Base 1.0
Preset 5<
Accum 0<
EN
DN
Soap Timer
SOAP_TIMER/EN
T4:3
EN
Soap Dispensor
SOAP_DISPENSOR
B9:0
9
State Value
0=IDLE.....4=RINSE
1=ENTER...5=DRY
2=WASH.....6=EXIT
3=SOAP.....7=FAULT
STATE_VALUE
Soap Timer
SOAP_TIMER/DN
T4:3
DN
B9:1
ONS
3
MOV
Move
Source 4 4<
Dest N7:0 0<


State Value
0=IDLE.....4=RINSE
1=ENTER...5=DRY
2=WASH.....6=EXIT
3=SOAP.....7=FAULT
STATE_VALUE
0004
EQU
Equal
Source A N7:0
0<
Source B 4
4<
Rinse Timer
RINSE_TIMER
TON
Timer On Delay
Timer T4:4
Time Base 1.0
Preset 15<
Accum 0<
EN
DN
Rinse Timer
RINSE_TIMER/EN
T4:4
EN
Water Pump
WATER_PUMP
B9:0
8
Rinse Timer DN
RINSE_TIMER/DN
T4:4
DN
Conveyor Timer 2
CONVEYOR_TIMER_2
TON
Timer On Delay
Timer T4:7
Time Base 1.0
Preset 3<
Accum 0<
EN
DN
State Value
0=IDLE.....4=RINSE
1=ENTER...5=DRY
2=WASH.....6=EXIT
3=SOAP.....7=FAULT
STATE_VALUE
Conveyor Timer 2
CONVEYOR_TIMER_2/DN
T4:7
DN
B9:1
ONS
4
MOV
Move
Source 5
5<
Dest N7:0
0<



State Value
0=IDLE.....4=RINSE
1=ENTER...5=DRY
2=WASH.....6=EXIT
3=SOAP.....7=FAULT
STATE_VALUE
0005
EQU
Equal
Source A N7:0
0<
Source B 5
5<
Dry Timer
DRY_TIMER
TON
Timer On Delay
Timer T4:5
Time Base 1.0
Preset 15<
Accum 0<
EN
DN
Dry Timer
DRY_TIMER/EN
T4:5
EN
Dryer
DRYER
B9:0
10
State Value
0=IDLE.....4=RINSE
1=ENTER...5=DRY
2=WASH.....6=EXIT
3=SOAP.....7=FAULT
STATE_VALUE
Drying Car DN
DRY_TIMER/DN
T4:5
DN
B9:1
ONS
5
MOV
Move
Source 6
6<
Dest N7:0
0<


State Value
0=IDLE.....4=RINSE
1=ENTER...5=DRY
2=WASH.....6=EXIT
3=SOAP.....7=FAULT
STATE_VALUE
0006
EQU
Equal
Source A N7:0
0<
Source B 6
6<
Conveyor Timer 3
CONVEYOR_TIMER_3
TON
Timer On Delay
Timer T4:8
Time Base 1.0
Preset 3<
Accum 0<
EN
DN
Conveyor Timer 3
CONVEYOR_TIMER_3/EN
T4:8
EN
Conveyor
CONVEYOR
B9:0
11
Conveyor Timer 3
CONVEYOR_TIMER_3/DN
T4:8
DN
B9:1
ONS
6
Car Counter
CAR_COUNTER
CTU
Count Up
Counter C5:0
Preset 0<
Accum 0<
CU
DN
Gate Front
GATE_FRONT
B9:0
U
3
State Value
0=IDLE.....4=RINSE
1=ENTER...5=DRY
2=WASH.....6=EXIT
3=SOAP.....7=FAULT
STATE_VALUE
MOV
Move
Source 0
0<
Dest N7:0
0<


State Value
0=IDLE.....4=RINSE
1=ENTER...5=DRY
2=WASH.....6=EXIT
3=SOAP.....7=FAULT
STATE_VALUE
EQU
Equal
Source A N7:0
0<
Source B 7
7<
0007
Gate Front
GATE_FRONT
B9:0
U
3
State Value
0=IDLE.....4=RINSE
1=ENTER...5=DRY
2=WASH.....6=EXIT
3=SOAP.....7=FAULT
STATE_VALUE
Emergency Reset
EMERGENCY_RESET
B9:0
7
MOV
Move
Source 0
0<
Dest N7:0
0<
State Value
0=IDLE.....4=RINSE
1=ENTER...5=DRY
2=WASH.....6=EXIT
3=SOAP.....7=FAULT
STATE_VALUE
E-Stop Fault
ESTOP_FAULT
B9:0
14
0008
MOV
Move
Source 7
7<
Dest N7:0
0<
Temperature Fault
TEMP_FAULT
B9:0
13
Pressure Fault
PRESSURE_FAULT
B9:0
12
0009
END


Scaled Pressure (0-2000 PSI)
PRESSURE
GRT
Greater Than (A>B)
Source A F8:0 364.0<
Source B 1500.0 1500.0<
Water Pressure Fault Reset
WTR_PRSSR_FAULT_RST
B3:1
5
Pressure Fault
PRESSURE_FAULT
B9:0
12
0000
Pressure Fault
PRESSURE_FAULT
B9:0
12
Scaled Motor Temp (0-300 degrees F)
SCALED_MOTOR_TEMP
GRT
Greater Than (A>B)
Source A F8:1 236.0<
Source B 140.0 140.0<
Motor Temp Fault Reset
MOTR_TEMP_FAULT_RST
B3:1
6
Temperature Fault
TEMP_FAULT
B9:0
13
0001
Temperature Fault
TEMP_FAULT
B9:0
13
E-Stop
E_STOP
B9:0
2
Emergency Reset
EMERGENCY_RESET
B9:0
7
E-Stop Fault
ESTOP_FAULT
B9:0
14
0002
E-Stop Fault
ESTOP_FAULT
B9:0
14
0003
END

LAD 6 - SIMULATION --- Total Rungs in File = 1



Data File O0 (bin) -- OUTPUT

Offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
O:0.0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763 MicroLogix 1100 Series B
O:0.1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763 MicroLogix 1100 Series B
O:0.2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763 MicroLogix 1100 Series B
O:0.3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763 MicroLogix 1100 Series B
O:2.0									0	0	0	0	0	0	0	0	1762-OA8 - 8-Output 120/240 VAC
O:3.0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1762-IF2OF2 - Analog 2 Chan. Input, 2 Chan. O
O:3.1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1762-IF2OF2 - Analog 2 Chan. Input, 2 Chan. O

Data File I1 (bin) -- INPUT

Offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	
I:0.0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763 MicroLogix 1100 Series B
I:0.1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763 MicroLogix 1100 Series B
I:0.2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763 MicroLogix 1100 Series B
I:0.3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763 MicroLogix 1100 Series B
I:0.4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763 MicroLogix 1100 Series B-Analog
I:0.5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	Bul.1763 MicroLogix 1100 Series B-Analog
I:1.0									0	0	0	0	0	0	0	0	1762-IQ8 - 8-Input 10/30 VDC
I:3.0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1762-IF2OF2 - Analog 2 Chan. Input, 2 Chan. O
I:3.1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1762-IF2OF2 - Analog 2 Chan. Input, 2 Chan. O
I:3.2	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1762-IF2OF2 - Analog 2 Chan. Input, 2 Chan. O
I:3.3	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1762-IF2OF2 - Analog 2 Chan. Input, 2 Chan. O
I:3.4	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1762-IF2OF2 - Analog 2 Chan. Input, 2 Chan. O
I:3.5	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1762-IF2OF2 - Analog 2 Chan. Input, 2 Chan. O

Data File S2 (hex) -- STATUS

Main

Processor Mode S:1/0 - S:1/4 = Remote Run
On Power up Go To Run (Mode Behavior) S:1/12 = 0
First Pass S:1/15 = No
Free Running Clock S:4 = 0000-0000-0000-0000

Proc

OS Catalog Number S:57 = 1100
OS Series S:58 = A
OS FRS S:59 =
Processor Catalog Number S:60 =
Processor Series S:61 = A
Processor FRN S:62 =
User Program Type S:63 = 8001h
Compiler Revision Number S:64 =

Scan Times

Maximum (x10 ms) S:22 = 0
Watchdog (x10 ms) S:3 (high byte) = 10
Last 100 uSec Scan Time S:35 = 0
Scan Toggle Bit S:33/9 = 0

Math

Math Overflow Selected S:2/14 = 0
Overflow Trap S:5/0 = 0
Carry S:0/0 = 0
Overflow S:0/1 = 0
Zero Bit S:0/2 = 0
Sign Bit S:0/3 = 0
Math Register (lo word) S:13 = 0
Math Register (high word) S:14-S:13 = 0
Math Register (32 Bit) S:14-S:13 = 0

Chan 0

Processor Mode S:1/0- S:1/4 = Remote Run
Node Address S:15 (low byte) = 0
Baud Rate S:15 (high byte) = ?
Channel Mode S:33/3 = 0
Comms Active S:33/4 = 0
Incoming Cmd Pending S:33/0 = 0
Msg Reply Pending S:33/1 = 0
Outgoing Msg Cmd Pending S:33/2 = 0

Debug

Suspend Code S:7 = 0
Suspend File S:8 = 0

Errors

Fault Override At Power Up S:1/8 = 0
Startup Protection Fault S:1/9 = 0
Major Error Halt S:1/13 = 0
Overflow Trap S:5/0 = 0
Control Register Error S:5/2 = 0
Major Error Executing User Fault Rtn. S:5/3 = 0
Battery Low S:5/11 = 0
Input Filter Selection Modified S:5/13 = 0
ASCII String Manipulation error S:5/15 = 0
Fault Routine S:29 = 0
Major Error S:6 = 0h
Error Description:

Protection

Deny Future Access S:1/14 = No
Data File Overwrite Protection Lost S:36/10 = False

Mem Module

Memory Module Loaded On Boot S:5/8 = 0
Password Mismatch S:5/9 = 0
Load Memory Module On Memory Error S:1/10 = 0
Load Memory Module Always S:1/11 = 0
On Power up Go To Run (Mode Behavior) S:1/12 = 0
Program Compare S:2/9 = 0
Data File Overwrite Protection Lost S:36/10 = 0

Forces

Forces Enabled S:1/5 = Yes
Forces Installed S:1/6 = No

Data File B3 (bin) -- BINARY

Offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	(Symbol) Description
B3:0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
B3:1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	

Data File T4 -- TIMER

Offset	EN	TT	DN	BASE	PRE	ACC	(Symbol) Description
T4:0	0	0	0	1.0 sec	5	0	(PE TIMER) PE Timer for stable sensor reading
T4:1	0	0	0	1.0 sec	5	0	(FRONT_GATE_TIMER) Front Gate Timer
T4:2	0	0	0	1.0 sec	15	0	(WASH_TIMER) Wash Timer
T4:3	0	0	0	1.0 sec	5	0	(SOAP_TIMER) Soap Timer
T4:4	0	0	0	1.0 sec	15	0	(RINSE_TIMER) Rinse Timer
T4:5	0	0	0	1.0 sec	15	0	(DRY_TIMER) Dry Timer
T4:6	0	0	0	1.0 sec	3	0	(CONVEYOR_TIMER_1) Conveyor Timer 1
T4:7	0	0	0	1.0 sec	3	0	(CONVEYOR_TIMER_2) Conveyor Timer 2
T4:8	0	0	0	1.0 sec	3	0	(CONVEYOR_TIMER_3) Conveyor Timer 3

Data File C5 -- COUNTER

Offset	CU	CD	DN	OV	UN	UA	PRE	ACC	(Symbol) Description
C5:0	0	0	0	0	0	0	0	0	(CAR_COUNTER) Car Counter

Data File R6 -- CONTROL

Offset	EN	EU	DN	EM	ER	UL	IN	FD	LEN	POS	(Symbol)	Description
R6:0	0	0	0	0	0	0	0	0	0	0		

Data File N7 (dec) -- INTEGER

Offset	0	1	2	3	4	5	6	7	8	9
N7:0	0									

Data File F8 -- FLOAT

Offset	0	1	2	3	4
F8:0	364	236	0		

Data File B9 (bin) -- DIGITAL IO

Offset	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	0	(Symbol) Description
B9:0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	
B9:1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	

Data File N10 (dec) -- ANALOG IO

Offset	0	1	2	3	4	5	6	7	8	9
N10:0	0	0	0	0						

Address/Symbol Database

Address	Symbol	Scope	Description	Sy
B3:0/0	IDLE	Global	IDLE	
B3:0/1	ENTERING	Global	ENTERING	
B3:0/2	PRE_WASH	Global	PRE WASH	
B3:0/3	SOAP	Global	SOAP	
B3:0/4	RINSE	Global	RINSE	
B3:0/5	DRY	Global	DRY	
B3:0/6	EXIT	Global	EXIT	
B3:1/0			Start Button	
B3:1/1			Stop Button	
B3:1/2			E-Stop	
B3:1/3			Front Gate Sensor	
B3:1/4			Rear PhotoEye	
B3:1/5	WTR_PRSSR_FAULT_RST	Global	Water Pressure Fault Reset	
B3:1/6	MOTR_TEMP_FAULT_RST	Global	Motor Temp Fault Reset	
B3:1/7	E_RST_BUTTON	Global	Emergency Reset Button	
B3:1/8			Water Pump	
B3:1/9			Soap Dispensor	
B3:1/10			Dryer	
B3:1/11			Conveyor	
B3:1/12			Pressure Fault	
B3:1/13			Temperature Fault	
B3:1/14			E-Stop Fault	
B9:0/0	PB_START	Global	PB Start	
B9:0/1	PB_STOP	Global	PB Stop	
B9:0/2	E_STOP	Global	E-Stop	
B9:0/3	GATE_FRONT	Global	Gate Front	
B9:0/4	PE_REAR	Global	PE Rear	
B9:0/5	PWS_WATER_PRESSURE	Global	PSW Water Pressure	
B9:0/6	OVERTEMP	Global	Overtemp	
B9:0/7	EMERGENCY_RESET	Global	Emergency Reset	
B9:0/8	WATER_PUMP	Global	Water Pump	
B9:0/9	SOAP_DISPENSOR	Global	Soap Dispensor	
B9:0/10	DRYER	Global	Dryer	
B9:0/11	CONVEYOR	Global	Conveyor	
B9:0/12	PRESSURE_FAULT	Global	Pressure Fault	
B9:0/13	TEMP_FAULT	Global	Temperature Fault	
B9:0/14	ESTOP_FAULT	Global	E-Stop Fault	
B9:1/0				
B9:1/1				
B9:1/2				
B9:1/3				
B9:1/4				
B9:1/5				
B9:1/6				
B9:1/8				
B9:9	WASHING_CAR	Global	Washing Car	
B9:13			Conveyor	
C5:0	CAR_COUNTER	Global	Car Counter	
F8:0	PRESSURE	Global	Scaled Pressure (0- 2000 PSI)	
F8:0/0	SCALED_PRESSURE	Global	Scaled Pressure	
F8:1	SCALED_MOTOR_TEMP	Global	Scaled Motor Temp (0-300 degrees F)	
F8:2	SCALED_CONV_TEMP	Global	Scaled Conveyor Temp (0-300 degrees F)	
N7:0	STATE_VALUE	Global	State Value 0=IDLE.....4=RINSE 1=ENTER...5=DRY 2=WASH.....6=EXIT 3=SOAP.....7=FAULT	
N10:0			Pressure	
N10:0/0			Pressure	
N10:1			Brush Temperature	
N10:2			Conveyor Temp	
S:0			Arithmetic Flags	
S:0/0			Processor Arithmetic Carry Flag	
S:0/1			Processor Arithmetic Underflow/ Overflow Flag	
S:0/2			Processor Arithmetic Zero Flag	
S:0/3			Processor Arithmetic Sign Flag	
S:1			Processor Mode Status/ Control	
S:1/0			Processor Mode Bit 0	
S:1/1			Processor Mode Bit 1	
S:1/2			Processor Mode Bit 2	
S:1/3			Processor Mode Bit 3	
S:1/4			Processor Mode Bit 4	
S:1/5			Forces Enabled	
S:1/6			Forces Present	
S:1/7			Comms Active	
S:1/8			Fault Override at Powerup	
S:1/9			Startup Protection Fault	
S:1/10			Load Memory Module on Memory Error	
S:1/11			Load Memory Module Always	
S:1/12			Load Memory Module and RUN	
S:1/13			Major Error Halted	
S:1/14			Access Denied	
S:1/15			First Pass	
S:2/0			STI Pending	
S:2/1			STI Enabled	
S:2/2			STI Executing	
S:2/3			Index Addressing File Range	
S:2/4			Saved with Debug Single Step	

Address/Symbol Database

Address	Symbol	Scope	Description	Sy
S:2/5			DH-485 Incoming Command Pending	
S:2/6			DH-485 Message Reply Pending	
S:2/7			DH-485 Outgoing Message Command Pending	
S:2/15			Comms Servicing Selection	
S:3			Current Scan Time/ Watchdog Scan Time	
S:4			Time Base	
S:5/0			Overflow Trap	
S:5/2			Control Register Error	
S:5/3			Major Err Detected Executing UserFault Routine	
S:5/4			M0-M1 Referenced on Disabled Slot	
S:5/8			Memory Module Boot	
S:5/9			Memory Module Password Mismatch	
S:5/10			STI Overflow	
S:5/11			Battery Low	
S:6			Major Error Fault Code	
S:7			Suspend Code	
S:8			Suspend File	
S:9			Active Nodes	
S:10			Active Nodes	
S:11			I/O Slot Enables	
S:12			I/O Slot Enables	
S:13			Math Register	
S:14			Math Register	
S:15			Node Address/ Baud Rate	
S:16			Debug Single Step Rung	
S:17			Debug Single Step File	
S:18			Debug Single Step Breakpoint Rung	
S:19			Debug Single Step Breakpoint File	
S:20			Debug Fault/ Powerdown Rung	
S:21			Debug Fault/ Powerdown File	
S:22			Maximum Observed Scan Time	
S:23			Average Scan Time	
S:24			Index Register	
S:25			I/O Interrupt Pending	
S:26			I/O Interrupt Pending	
S:27			I/O Interrupt Enabled	
S:28			I/O Interrupt Enabled	
S:29			User Fault Routine File Number	
S:30			STI Setpoint	
S:31			STI File Number	
S:32			I/O Interrupt Executing	
S:33			Extended Proc Status Control Word	
S:33/0			Incoming Command Pending	
S:33/1			Message Reply Pending	
S:33/2			Outgoing Message Command Pending	
S:33/3			Selection Status User/DF1	
S:33/4			Communicat Active	
S:33/5			Communicat Servicing Selection	
S:33/6			Message Servicing Selection Channel 0	
S:33/7			Message Servicing Selection Channel 1	
S:33/8			Interrupt Latency Control Flag	
S:33/9			Scan Toggle Flag	
S:33/10			Discrete Input Interrupt Reconfigur Flag	
S:33/11			Online Edit Status	
S:33/12			Online Edit Status	
S:33/13			Scan Time Timebase Selection	
S:33/14			DTR Control Bit	
S:33/15			DTR Force Bit	
S:34			Pass-thru Disabled	
S:34/0			Pass-Thru Disabled Flag	
S:34/1			DH+ Active Node Table Enable Flag	
S:34/2			Floating Point Math Flag Disable,Fl	
S:35			Last 1 ms Scan Time	
S:36			Extended Minor Error Bits	
S:36/8			DII Lost	
S:36/9			STI Lost	
S:36/10			Memory Module Data File Overwrite Protection	
S:37			Clock Calendar Year	
S:38			Clock Calendar Month	
S:39			Clock Calendar Day	
S:40			Clock Calendar Hours	
S:41			Clock Calendar Minutes	
S:42			Clock Calendar Seconds	
S:43			STI Interrupt Time	
S:44			I/O Event Interrupt Time	
S:45			DII Interrupt Time	
S:46			Discrete Input Interrupt- File Number	
S:47			Discrete Input Interrupt- Slot Number	
S:48			Discrete Input Interrupt- Bit Mask	
S:49			Discrete Input Interrupt- Compare Value	
S:50			Processor Catalog Number	
S:51			Discrete Input Interrupt- Return Number	
S:52			Discrete Input Interrupt- Accumulat	
S:53			Reserved/ Clock Calendar Day of the Week	

Address/Symbol Database

Address	Symbol	Scope	Description	Sy
S:55			Last DII Scan Time	
S:56			Maximum Observed DII Scan Time	
S:57			Operating System Catalog Number	
S:58			Operating System Series	
S:59			Operating System FRN	
S:61			Processor Series	
S:62			Processor Revision	
S:63			User Program Type	
S:64			User Program Functional Index	
S:65			User RAM Size	
S:66			Flash EEPROM Size	
S:67			Channel 0 Active Nodes	
S:68			Channel 0 Active Nodes	
S:69			Channel 0 Active Nodes	
S:70			Channel 0 Active Nodes	
S:71			Channel 0 Active Nodes	
S:72			Channel 0 Active Nodes	
S:73			Channel 0 Active Nodes	
S:74			Channel 0 Active Nodes	
S:75			Channel 0 Active Nodes	
S:76			Channel 0 Active Nodes	
S:77			Channel 0 Active Nodes	
S:78			Channel 0 Active Nodes	
S:79			Channel 0 Active Nodes	
S:80			Channel 0 Active Nodes	
S:81			Channel 0 Active Nodes	
S:82			Channel 0 Active Nodes	
S:83			DH+ Active Nodes	
S:84			DH+ Active Nodes	
S:85			DH+ Active Nodes	
S:86			DH+ Active Nodes	
T4:0	PE_TIMER	Global	PE Timer for stable sensor reading	
T4:0/DN			Rear PhotoEye DN	
T4:0/EN				
T4:1	FRONT_GATE_TIMER	Global	Front Gate Timer	
T4:1/DN			Front Gate Timer DN	
T4:2	WASH_TIMER	Global	Wash Timer	
T4:2/DN			Wash Timer	
T4:2/EN				
T4:3	SOAP_TIMER	Global	Soap Timer	
T4:3/DN				
T4:3/EN				
T4:4	RINSE_TIMER	Global	Rinse Timer	
T4:4/DN			Rinse Timer DN	
T4:4/EN				
T4:5	DRY_TIMER	Global	Dry Timer	
T4:5/DN			Drying Car DN	
T4:5/EN				
T4:6	CONVEYOR_TIMER_1	Global	Conveyor Timer 1	
T4:6/DN			Conveyor Timer DN	
T4:7	CONVEYOR_TIMER_2	Global	Conveyor Timer 2	
T4:7/DN				
T4:8	CONVEYOR_TIMER_3	Global	Conveyor Timer 3	
T4:8/DN				
T4:8/EN				
U:3				
U:4				

Instruction Comment Database

Address	Instruction	Description

Symbol Group Database

Group_Name	Description