

Fast, easy and reliable High speed printing with unique ease of use



CT-S801
(available in black or white)

LCD display

The industry's first POS printer with LCD display for easy configuration and operation. Many set up options and coloured status or error messages.

In a hurry?

With 300mm/sec. print speed the CT-S801 is the fastest POS printer in the market.

Toolfree maintenance

Paper jam? No problem for the CT-S801. One hand grip and the cutter is released automatically. No tool is needed.

Even if the long-life cutter ever needs to be exchanged. Thanks to it's Snap-In design this only takes 30 seconds.

Internal Power Supply

All 80mm POS printers from Citizen offer an internal power supply.

CT-S801 POS

Applications

- Receipt
- Coupon
- Ticket
- Daily Report
- Kitchen
- Delivery slip
- Barcode
- Weigh scales
- Kiosk
- Queue management



Online status



Error message with instruction



Snap-in cutter

CITIZEN

Micro HumanTech

Specifications

Printing method	Line thermal dot printing								
Printing width	80mm/640 dots, 72mm/576 dots, 64mm/512 dots, 54.5mm/436 dots, 54mm/432 dots, 52.5mm/420 dots, 48mm/384 dots, 45mm/360 dots, 48.75mm/390 dots, 68.25mm/546 dots								
Dot pitch	8 x 8 dots/mm (203 dpi)								
Printing speed	300mm/s (fastest, print density 100%), 2400 dot-lines/s								
Number of columns	83mm paper: Font A – 53, Font B – 71, Font C – 80, 80mm paper: Font A – 48, Font B – 64, Font C – 72, 60mm paper: Font A – 36, Font B – 48, Font C – 54, 58mm paper: Font A – 35, Font B – 46, Font C – 52								
Character size (WxH)	1.50 x 3.00mm (Font A: 12 x 24 dots), 1.13 x 2.13mm (Font B: 9 x 17 dots), 1.00 x 2.00mm (Font C: 8 x 16 dots)								
Character table	Alphanumeric, international, PC437/850/852/857/858/860/863/864/865/866/WPC1252/katakana/Thai code 18								
Barcode type	UPC-A/E, JAN-13/8, Code 39, Code 128, CODABAR, Code 93, PDF417, QR Code								
Logo registration/print	384 KB (capable of storing user-defined characters and logos)								
Line spacing	4.23mm (1/6 inch), can be set by command								
Paper	<table> <tr> <td>Width</td><td>83mm/80mm/60mm/58mm (all +0/-1mm)</td></tr> <tr> <td>Diameter</td><td>maximum 83mm</td></tr> <tr> <td>Thickness</td><td>65-75µm (core tube diameter: inner 12mm/outer 18mm) 75-150µm (core tube diameter: inner 25.4mm/outer 32mm)</td></tr> <tr> <td>Recommended Paper</td><td>TF-50KS-E-2D from Nippon Paper, PD150R or PD160R from Ohji Paper, PA220AG, HP220A, HP220AB-1, F230AA, P220AB, or PB670 (2-color paper) from Mitsubishi Paper</td></tr> </table>	Width	83mm/80mm/60mm/58mm (all +0/-1mm)	Diameter	maximum 83mm	Thickness	65-75µm (core tube diameter: inner 12mm/outer 18mm) 75-150µm (core tube diameter: inner 25.4mm/outer 32mm)	Recommended Paper	TF-50KS-E-2D from Nippon Paper, PD150R or PD160R from Ohji Paper, PA220AG, HP220A, HP220AB-1, F230AA, P220AB, or PB670 (2-color paper) from Mitsubishi Paper
Width	83mm/80mm/60mm/58mm (all +0/-1mm)								
Diameter	maximum 83mm								
Thickness	65-75µm (core tube diameter: inner 12mm/outer 18mm) 75-150µm (core tube diameter: inner 25.4mm/outer 32mm)								
Recommended Paper	TF-50KS-E-2D from Nippon Paper, PD150R or PD160R from Ohji Paper, PA220AG, HP220A, HP220AB-1, F230AA, P220AB, or PB670 (2-color paper) from Mitsubishi Paper								
Interface	Serial (RS-232C compliant), parallel (IEEE 1284 compliant), USB, USB with hub, Ethernet, powered USB								
Input buffer	4K bytes/45 bytes								
Drawer kick-out	2 drawers								
External device port	RJ-45, 8-pin connector								
Liquid crystal display (LCD)	128 x 32 dots STN liquid crystal, white/red LED backlight								
Power supply	Input: AC 100 to 240V, 50/60 Hz, 150 VA, Output: DC 24, 2.1 A								
Weight	CT-S801S: Approx. 2 kg, CT-S801A: Approx. 1.6 kg								
Dimensions (W x D x H)	CT-S801S: 145 x 192 x 148 mm, CT-S801A: 145 (W) x 192 (D) x 120 (H) mm								
Operating environment	5 to 45°C, 10 to 90% RH (no condensation)								
Storage environment	-20 to 60°C, 10 to 90% RH (no condensation)								
Reliability	Print head life: 150km, 200 million pulses (at normal temperature and humidity using recommended paper), Auto cutter life: 2 million cuts (at normal temperature/humidity, using recommended paper and paper thickness)								
EMC and safety standards	UL, C-UL, FCC Class A, TUV-Bauart, CE Marking								

Type Classification

CT-S801S 3 RS E BK P L M1

1) 2) 3) 4) 5) 6) 7) 8) 9)

Accessories



Interface Connections

Serial IF1-RS01	USB incl. USB hub IF1-HU01
Parallel IF1-PA01	Ethernet (SEH) IF1-ES01
USB IF1-UB01	Ethernet (Standard) IF1-ET01
Powered USB IF1-PU01	



Exchangeable interfaces plus RJ-45 port

Customization Software

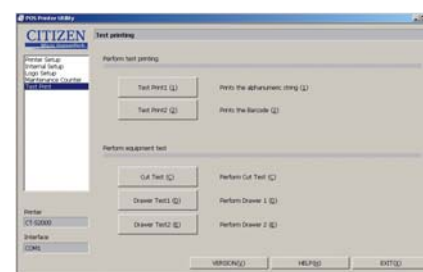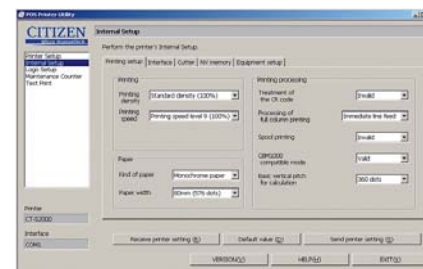

Features



- 300mm / sec high-speed printing
- 82,5/80/60/58 mm selectable paper width
- Easy paper loading
- Auto retracting Cutter (full/partial)
- Snap-in cutter
- LCD display
- Built-in buzzer
- Top paper exit
- Paper roll capacity Ø 83mm
- Exchangeable interface cards
- RJ-45 port
- Built-in AC adaptor
- Cash drawer kick-out
- Bitmap registration (NV memory)
- Barcode printing
- ESC/POS compatibility
- Page mode
- Two color printing
- Smoothing fonts
- Available in white, black or dark grey (option)
- Driver: Win2000/XP/Vista/2003 Server, OPOS, Java POS, CUPS
- Utility software: Printer Customization, POS Printer Utility

1) Model type
CT-S801

2) Power supply
DC: No power source
S: Built-in power supply type
A: AC adapter type

3) Paper width
3: 3 inch (80/83 mm)
2: 2 inch (58/60 mm)

4) Interface
PA: Parallel
RS: Serial RS-232C
UB: USB only
UH: USB with hub
ET: Ethernet (standard type)
ES: Ethernet (multi-function type)
UP: Powered USB

8) Label
No
L: Label type
9) Black Mark sensor
No
M1: Left side
M2: Right side

5) Market: *
J: Japanese
BK: Black
U: North America
C: China

6) Body case color
WH: White
BK: Black
GR: Gray

7) PNE sensor
No
P: PNE sensor



www.logiscenter.com
902 050 030



www.logiscenter.it
02 479 216 97



www.logiscenter.de
info@logiscenter.de



www.logiscenter.pt
308 800 842

About LOGISCENTER

Grupo Logiscenter is the leading provider in Europe of automatic identification and data capture equipments. Our products include barcode printing and reading devices, mobile computing devices, wireless access points, identification cards, and consumables.

Reasons to work with us

Our customers come first. Our objective is not only selling our products but also holding a long-lasting relationship with our customers, based on the benefits and advantages we create for you and your company.

The best brands. We offer products from the best manufacturers worldwide.

Expert technical support team. Our support staff are experts in the products we sell. But not just the products, they can tell you the best solution for your particular problem or need.

Largest stock. We have a permanent stock of more than 12,000 products.

Same-day shipping. For all orders placed and confirmed before 16:00 on working days.


Best prices. With Logiscenter, you can be sure that you are paying a fair price for your products we will not overcharge you.

Easy returns. Damaged or defective products can be returned easily, for an exchange or reimbursement.

Solutions for: Industry • Consumer • Mobility Transportation and Logistics • Retail • Health




Label printers



Barcode readers



Data terminals & PDA



PVC card printers



RFID



Consumables
(labels, ribbons, PVC cards)

Our Brands



MOTOROLA



Intermec®

Honeywell®

DATALOGIC™



datamax • o'neil

Metrologic

LXE

EPSON®

elo

star

unitech

PRINTRONIX

symbol®



All Brands
Technical Service