

How to Set Charging and Discharging Period

Author: Eason

Hybrid INV

Issue introduction


I don't know how to set the charge and discharge time periods, or the meanings of the related settings.

Forced Charge Period Start Time	
00:00	Save
Forced Charge Period End Time	
06:00	Save
Allowed Disc Period Start Time	
06:00	Save
Allowed Disc Period End Time	
23:59	Save

Operation guidance

Step1: Go to <User settings> to set the parameters for each work mode and set charging and discharging period.

Setting path: *Setting*→*Password(0000)*→*User settings*

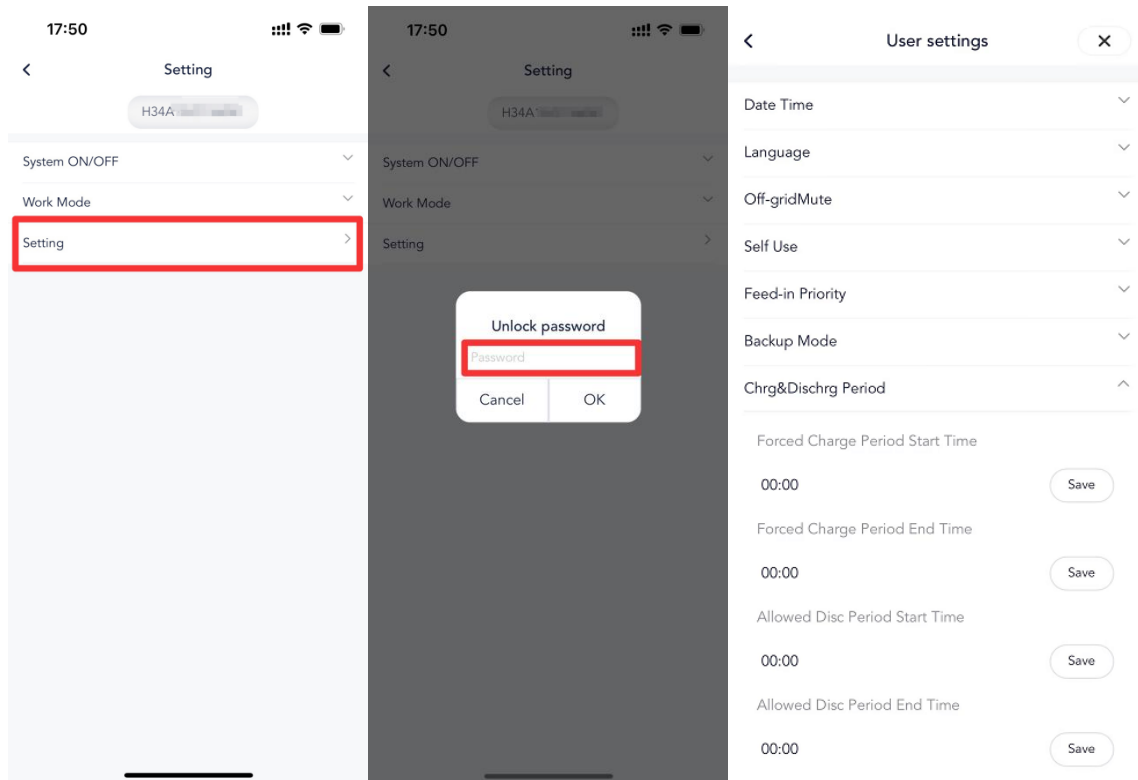

Step2: Example of selfuse operating mode, understand the settings such as Min SOC.

Self Use	
Min Soc (%)	
10	Save
Charge from grid	
Enable	Save
Charge battery to (%)	
30	Save

Min Soc (setable range 10%~100%): When the battery discharges to the set minimum SOC value, it will stop discharging, and the inverter will enter idle mode, halting operation. It will remain in this state until surplus PV energy is available to charge the battery, or until the scheduled boost charging time period begins, at which point it will charge the battery using grid power.

Charge from grid(enable/disable): It depends on whether you are willing to buy electricity from the grid to charge the battery. When you enable the "Charge from Grid" feature, you can configure the "Charge Battery to" setting. This determines the maximum state of charge you want to allow the battery to reach when charging from the grid. The setting in the above diagram indicates that during the charging process, the battery will charge from the grid at full power until the SOC reaches 30%. Once it reaches 30%, the battery will wait for surplus PV energy to charge the battery until it is fully charged.

Step3: For the <Chrg&Dischrg Period> setting, The battery will only discharge during the allowed discharge time period. If the time settings for parts 1 and 2 overlap, the charging time of part 1 will take priority and be executed first.

Chrg&Dischrg Period ^

Forced Charge Period Start Time
00:00
Save

Forced Charge Period End Time
06:00
Save

Allowed Disc Period Start Time
06:00
Save

Allowed Disc Period End Time
23:59
Save

In the forced charge period, when the battery SOC is lower than the value set in ****<Charge battery to %>**** mentioned in step 2, both PV and grid power will prioritize charging the battery. However, when the SOC is higher than this value, the battery will not discharge, even if PV energy is insufficient to power the load.

In the allowed discharge period, both the battery and PV will supply power to the load, with PV being prioritized. Once the battery discharges to the value set in ****<Min SOC>****, the inverter will enter idle mode.

Please note

- If the settings save fails, please check your mobile network, ensure a stable connection, log out of your account, and then log back in. Follow the steps above to make the changes.