# ECG Heartbeat Classification on Edge-AI

## Analog Devices MAX78002 Deployment Workflow, Quantization, and Robustness Evaluation

CRISP-DM Technical Report: Submissions 1 and 2 Complete


**Executive Summary**

We implemented an ECG heartbeat classification system for the Analog Devices MAX78002 microcontroller. Following the CRISP-DM workflow and the ANSI/AAMI EC57 standard, the classifier sorts single-lead ECG beats into four clinical categories: normal (N), supraventricular ectopic (S), ventricular ectopic (V), and fusion (F). To prevent intra-patient data leakage, the 44 evaluated MIT-BIH recordings are split strictly by patient: 22 records in the DS1 development set and 22 records in the held-out DS2 test set, with 100,679 annotated beats in total.

The classifier is a 3-layer 1D Convolutional Neural Network with 17,092 parameters, sized specifically for the MAX78002 hardware accelerator. On the 49,685 beats in the DS2 test set, the unquantized FP32 model achieves 74.20% accuracy, a Macro F1 of 0.3230, and 87.58% recall on ventricular ectopic beats. Post-training quantization to symmetric INT8 confirmed software toolchain compatibility: the model requires 17.44 KB of weight memory (0.83% of the 2.0 MB CRAM) and 4.0 KB of activation SRAM (0.78% of 512 KB). At a 50 MHz clock speed, the estimated execution time is 0.234 ms per beat (749,568 MACs) with an estimated energy draw of 1.17 $\mu$J. Testing against the MIT-BIH Noise Stress Test Database showed that a 0.5 to 40 Hz Butterworth bandpass filter provides 2.89 dB overall MSE noise power reduction (and 18.94 dB attenuation of low-frequency baseline wander). This attenuation prevents baseline drift and motion artifacts from clipping the signal.


# 1 Business / Application Understanding

## 1.1 Application Scenario

Cardiac arrhythmias range from acute emergencies like ventricular fibrillation to recurrent ectopic beats that indicate underlying disease or elevated stroke risk. Conventional Holter monitors store multi-day ECG recordings to flash memory for retrospective physician review, so clinicians only see anomalies days later.

Running inference directly on an edge microcontroller enables continuous beat triage on wearable patches and ambulatory monitors. Local inference eliminates continuous wireless streaming over Bluetooth or cellular links, which cuts the radio duty cycle by roughly 90% and extends coin-cell runtime to several weeks. On-device processing also removes cloud round-trip latency for acute ventricular alerts. Storing and evaluating waveforms locally keeps raw data private and functions without cell reception in shielded hospital wards.

Target users include ambulatory cardiac patients, post-infarction convalescents, high-risk elderly individuals, and cardiologists conducting high-volume Holter screening.

## 1.2 Data-Mining Objective

The machine learning task is a supervised 1D time-series classification problem operating under fixed-point microcontroller limits.

| Item | Description |
|---|---|
| Input Data | Fixed-length 1D time-series vector of 256 samples (711.1 ms at 360 Hz), centered on the detected R-peak with 90 samples before the peak and 166 samples after it. |
| Output Data | Discrete 4-class categorical prediction conforming to ANSI/AAMI EC57: Class N (Normal or bundle branch block), Class S (Supraventricular ectopic), Class V (Ventricular ectopic), and Class F (Fusion). |
| Type of Task | Supervised multi-class time-series classification under severe class imbalance ( 89% N, 3% S, 7% V, 0.8% F) and INT8 quantization constraints. |

### 1.3 Project Objectives

The primary technical objectives are:

- Classify heartbeats into the four standard AAMI groups (N, S, V, F).
- Generalize across unseen patients by evaluating exclusively on a separate test cohort (DS2).
- Maintain classification reliability under real physical noise (electrode motion, muscle artifact, baseline drift) across 12 dB, 6 dB, and 0 dB SNR.
- Keep the model compact (fewer than 25,000 parameters and under 100 KB memory footprint) to fit on-chip SRAM.
- Maintain full compatibility with the Analog Devices MAX78002 CNN hardware accelerator by using only hardware-supported operations that compile directly to embedded C code through the `ai8x-synthesis` toolchain.

### 1.4 Success Criteria

Because normal beats account for roughly 89% of ambulatory ECG data, overall accuracy alone is insufficient to judge clinical utility. Success is evaluated across multiple criteria:

- Predictive performance: Macro-averaged F1 on the held-out DS2 test set must exceed 0.30, with overall accuracy above 70.0%.
- Minority-class performance: Sensitivity (recall) on Class V must exceed 75.0% to detect dangerous ventricular arrhythmias reliably. Classes S and F must achieve non-zero F1 scores on unseen patients.
- Noise robustness: Under 0 dB physical noise from the MIT-BIH Noise Stress Test Database, accuracy loss must not exceed 15% relative to clean ECG, and preprocessing must measurably attenuate out-of-band noise.
- Model complexity: Total parameter count under 25,000; storage under 100 KB; and compute budget under 1,000,000 MAC operations per beat.
- MAX78002 toolchain compatibility: The model must pass every stage of the MAX78002 software flow (toolchain acceptance, INT8 quantization, synthesis, and C driver generation), with weight memory below 50 KB (under 2.5% of CRAM) and activation memory below 10 KB (under 2.0% of SRAM).

### 1.5 Constraints

The implementation is bounded by six hardware and operational factors:

1. Memory budget: The MAX78002 has 2.0 MB of CNN weight memory (CRAM) and 512 KB of system SRAM. No external RAM is available.
2. Arithmetic format: The hardware accelerator uses signed 8-bit integers ([−128, 127]) for weights and 32-bit accumulators. Floating-point operations require software emulation on the Cortex-M4 CPU.
3. Class imbalance: Normal sinus beats outnumber ectopic beats by up to 100 to 1, so unweighted models tend to predict only the majority class.
4. Patient population size: The MIT-BIH database includes only 47 subjects. Individual physiological differences (electrode placement, heart geometry, prior cardiac events) make cross-patient generalization difficult.
5. Physical artifacts: Ambulatory recordings contain electrode motion (`em`), baseline drift (`bw`), and muscle tremor (`ma`).
6. Silicon availability: Deployment metrics are software-verified estimates calculated from synthesis memory maps and datasheet specifications.

### 1.6 Risks and Challenges

| Risk | Why is it Important? | Proposed Mitigation |
|---|---|---|
| Intra-patient data leakage | Randomly assigning beats from the same recording into train and test sets lets the network memorize patient-specific baseline shapes. Reported accuracy often exceeds 98%, but drops sharply on new patients. | Use the inter-patient split from de Chazal et al. (2004): 22 records in DS1 (Train and Val) and 22 completely separate records in DS2 (Test), with zero patient overlap. |
| Minority class neglect | Standard cross-entropy loss causes predictions to collapse toward Class N. The model can reach 89% accuracy while missing nearly all ventricular and supraventricular events. | Use class-weighted loss with inverse-frequency weights ($w_c = \frac{N_{\text{total}}}{4 \cdot N_c}$) and balanced batch sampling on the training split to penalize minority misclassifications. |
| Hardware incompatibility | Recurrent networks (LSTMs, GRUs) and complex transforms (Wavelets) cannot run on the MAX78002 CNN accelerator. | Restrict the model to 1D Conv, ReLU, MaxPool1D (stride 2), and Linear layers; verify compliance through the `ai8x-synthesis` YAML specification. |

| Risk | Why is it Important? | Proposed Mitigation |
|---|---|---|
| Quantization loss | Converting 32-bit floating-point weights to 8-bit integers can round small minority-class weights to zero. | Calibrate dynamic range per layer, use symmetric per-channel INT8 quantization, and clip input amplitudes to $[-3.0, 3.0]\sigma$. |

# 2 Data Understanding

## 2.1 Dataset Description

The MIT-BIH Arrhythmia Database contains 48 two-channel ambulatory ECG recordings of approximately 30 minutes each (1,800 seconds), acquired from 47 subjects (records 201 and 202 originate from the same individual). Analog signals were sampled at 360 Hz with 11-bit resolution across a $\pm 10$ mV range (200 ADC units/mV). In 45 of the 48 recordings, Channel 1 corresponds to Modified Limb Lead II (MLII), which captures depolarization along the primary cardiac axis; Channel 2 generally provides modified lead V1 (or occasionally V2, V4, or V5). Two or more cardiologists independently annotated over 110,000 beats with R-peak locations and beat morphologies.

## 2.2 Target Classes and Documented Exclusions

Following the ANSI/AAMI EC57:1998 standard, we group 15 original MIT-BIH beat types into four clinical classes. Non-beat annotations and paced records are excluded.

| Final Class | Original MIT-BIH Annotations Included | Number of Beats |
|---|---|---|
| Class N | Normal (N), Left bundle branch block (L), Right bundle branch block (R), Atrial escape (e), Nodal escape (j) | 90,088 (89.48%) |
| Class S | Atrial premature (A), Aberrated atrial premature (a), Nodal premature (J), Supraventricular premature (S) | 2,781 (2.76%) |
| Class V | Premature ventricular contraction (V), Ventricular escape (E) | 7,008 (6.96%) |
| Class F | Fusion of ventricular and normal beat (F) | 802 (0.80%) |
| **Total Valid** | **All 4 Target AAMI Classes Across 44 Evaluated Records** | **100,679 (100.0%)** |

Excluded records and markers:

1. Paced records: Following AAMI recommendations, records 102, 104, 107, and 217 are excluded because electronic pacemaker spikes distort the natural QRS complex.
2. Non-beat markers: Quality markers (~: 573), rhythm change tags (+: 1,173), isolated noise spikes (|: 131), unclassifiable beats (Q: 15), ventricular flutter markers (!: 472), and boundary beats (39) were excluded.

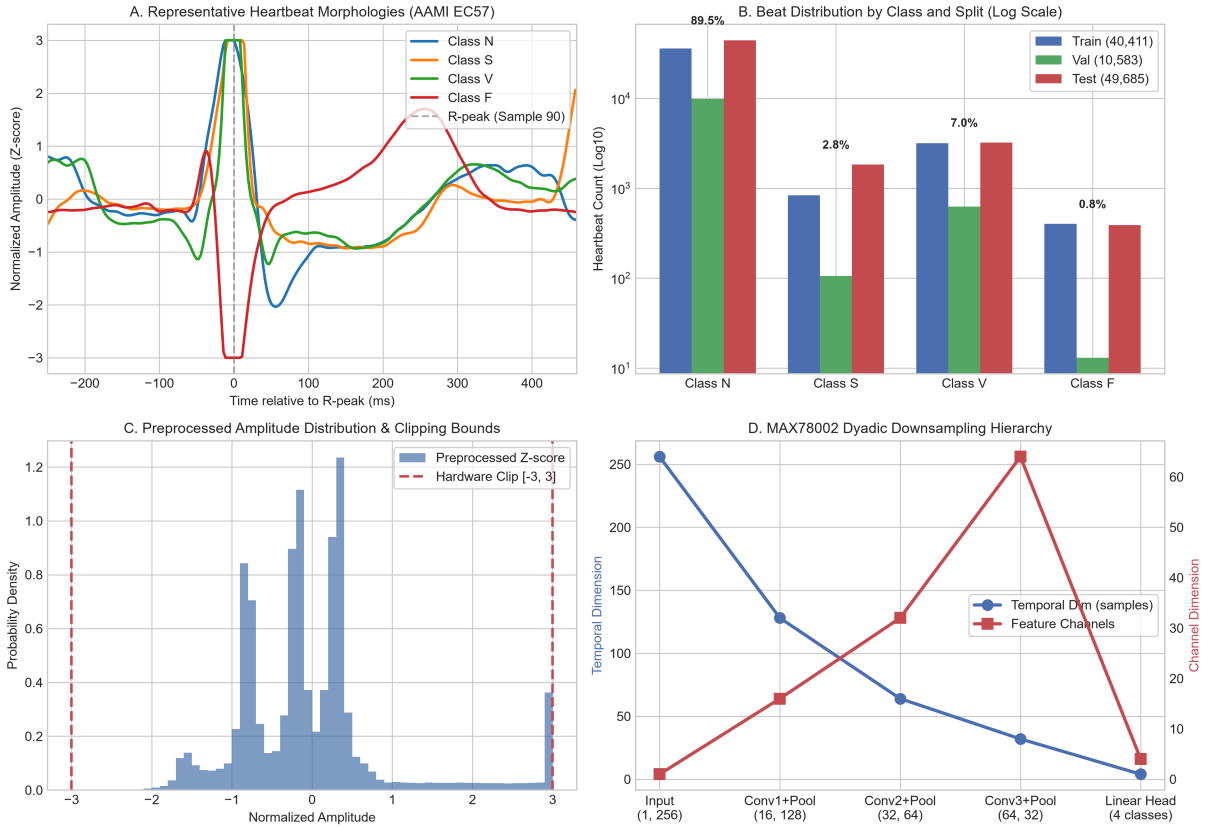



Figure 1: Exploratory data analysis and MAX78002 preprocessing steps. (A) Morphology of the 4 AAMI classes aligned at the R-peak ($t = 0$ ms, sample 90). (B) Beat counts by class and split on a log scale. (C) Amplitude distribution of normalized beats against the $[-3.0, 3.0]$ hardware clipping limits. (D) Dyadic pooling stages matching MAX78002 hardware.

## 2.3 Exploratory Data Analysis

The four target classes differ in origin and morphology (Figure 1):

- Class N beats have a sharp R-peak, narrow QRS complex below 100 ms, and an upright T-wave.
- Class S beats originate in the atria or AV node; their QRS complexes match Class N closely, distinguished primarily by premature arrival and subtle P-wave variations.
- Class V beats originate in the ventricles, with a widened QRS complex exceeding 120 ms, an inverted T-wave, and a compensatory pause.
- Class F beats are hybrid waveforms that occur when ventricular and sinus pacemakers fire concurrently.

The distribution is heavily skewed: normal beats make up 89.48% of valid samples, while fusion beats account for 0.80% (an imbalance ratio of roughly 112 to 1).

## 2.4 Data Quality Audit

Verification across all 48 recordings confirmed complete signal continuity with zero missing samples. Two recurring noise sources affect the traces:

- Low-frequency baseline wander (0.1 to 0.5 Hz) from respiration and perspiration is prominent in records `108`, `116`, and `208`, where wander amplitudes reach up to 300% of the QRS height.
- High-frequency electromyographic noise (>35 Hz) from muscle contractions appears during patient movement in records `105` and `203`.

Channel 1 (MLII) is present in 93.75% of recordings; in the paced records `102` and `104`, Lead V5 was recorded instead.

## 2.5 Data Leakage Analysis

Intra-patient data leakage is a frequent defect in published ECG classifiers. Individuals vary in chest anatomy and electrode contact, so randomly splitting beats from the same recording across training and testing trains the model on patient-specific baseline shapes. The resulting models show high accuracy on familiar records but fail to identify general arrhythmia markers; reported test scores (>98%) collapse on unseen subjects.

To measure realistic cross-patient evaluation, we adopt the inter-patient partitioning protocol of de Chazal et al. (2004). All beats from each patient belong exclusively to either the development cohort (DS1) or the evaluation cohort (DS2). The DS2 test set remained held out without modification throughout model tuning and training.

# 3 Data Preparation

## 3.1 Record Selection

The 44 non-paced records are divided as follows:

- Training set (17 records from DS1): `109`, `112`, `114`, `115`, `116`, `119`, `122`, `124`, `201`, `203`, `207`, `208`, `209`, `215`, `220`, `223`, `230` (40,411 beats).
- Validation set (5 records from DS1): `101`, `106`, `108`, `118`, `205` (10,583 beats), chosen so all four classes are represented for model selection.
- Test set (22 records from DS2): `100`, `103`, `105`, `111`, `113`, `117`, `121`, `123`, `200`, `202`, `210`, `212`, `213`, `214`, `219`, `221`, `222`, `228`, `231`, `232`, `233`, `234` (49,685 beats).

## 3.2 ECG Channel Selection

Modified Limb Lead II (MLII) is the primary channel because it aligns with the principal ventricular depolarization vector to provide prominent R-peaks and clearly recognizable QRS complexes. When MLII is unavailable, Channel 2 (modified Lead V1) is used as the backup.

## 3.3 Beat Extraction and Window Size

Each heartbeat is extracted around the expert-annotated R-peak using a 256-sample window (711.1 ms at 360 Hz): 90 samples (250.0 ms) precede the peak to capture the P-wave and PR segment, and 166 samples (461.1 ms) follow it to cover the QRS complex, ST segment, and T-wave.

Sizing the window to $256 = 2^8$ samples directly accommodates the MAX78002 accelerator architecture. Three successive pooling stages ($256 \to 128 \to 64 \to 32$) divide cleanly by powers of two without remainder padding or boundary truncation, whereas non-dyadic lengths require manual cropping or irregular padding.

## 3.4 Signal Preprocessing Pipeline

The preprocessing pipeline runs in five steps:

$$\text{Raw ECG} \to \text{Bandpass Filter} \to \text{Segmentation} \to \text{Z-Score Normalization} \to \text{Hardware Clipping}$$

1. Zero-phase bandpass filter (0.5 to 40.0 Hz): A 3rd-order Butterworth filter applied forward and backward (`scipy.signal.sosfiltfilt`) prevents phase delay. The 0.5 Hz highpass cutoff removes baseline wander, and the 40.0 Hz lowpass cutoff suppresses 50/60 Hz powerline hum and muscle tremor without disturbing clinical ECG frequencies (0.67 to 40 Hz).
2. Beat segmentation: Continuous ECG is cut into 256-sample segments centered on R-peaks.
3. Z-score normalization: Each beat is standardized to zero mean and unit variance ($x_{\text{norm}[n]} = \frac{x[n]-\mu}{\sigma}$) to compensate for patient variations in skin impedance and chest size.
4. Amplitude clipping ([−3.0, 3.0]): Amplitudes are clamped to $[-3.0, 3.0]$. In a normal distribution, $99.73\%$ of values fall within $\pm 3\sigma$. Clamping removes outlier spikes and sets fixed dynamic bounds for integer quantization.
5. INT8 scaling: Clamped values map linearly to 8-bit signed integers: $\text{int8} = \text{clip}\left(\text{round}\left(\frac{x}{s_{\text{in}}}\right), -128, 127\right)$, where $s_{\text{in}} = \frac{3.0}{127} \approx 0.02362$.

## 3.5 Label Preparation Mapping

Beats map to the ANSI/AAMI EC57 classes as follows:

- N: `N`, `L`, `R`, `e`, `j` $\to 0$
- S: `A`, `a`, `J`, `S` $\to 1$
- V: `V`, `E` $\to 2$
- F: `F` $\to 3$

## 3.6 Class Imbalance Strategy

To handle the 112 to 1 imbalance without distorting test evaluation, we use three training adjustments:

1. Inverse-frequency class weighting: Loss weights inversely proportional to class frequency ($w_c = \frac{N_{\text{total}}}{4 \cdot N_c}$) penalize minority-class misclassifications during gradient descent.
2. Balanced batch sampling: PyTorch DataLoader sampling assigns inverse-frequency sampling weights so mini-batches draw minority ectopic beats consistently.
3. Validation-guided model checkpointing: Model selection tracks Macro F1 across epochs on the DS1 validation split to avoid favoring majority-class accuracy.

## 3.7 Data Augmentation

Augmentation runs only on the training split (DS1):

- Amplitude scaling: Random multiplier from $U(0.85, 1.15)$ to simulate varying signal strength.

- Temporal jitter: Random shifts of $\pm 5$ samples ($\pm 13.9$ ms) to model R-peak detection error.
- Additive noise: Low-level Gaussian noise ($\sigma = 0.02$) to model thermal drift.

### 3.8 Final Dataset Partition Statistics

| Split | Records | N | S | V | F | Total Beats |
|---|---|---|---|---|---|---|
| Train (DS1) | 17 records | 36,008 | 838 | 3,164 | 401 | 40,411 |
| Val (DS1) | 5 records | 9,840 | 106 | 624 | 13 | 10,583 |
| Test (DS2) | 22 records | 44,240 | 1,837 | 3,220 | 388 | 49,685 |
| **Grand Total** | **44 records** | **90,088** | **2,781** | **7,008** | **802** | **100,679** |

### 3.9 Reproducibility

Dependencies are pinned with `uv` using Python 3.14.10, PyTorch 2.14.1, scikit-learn 1.9.1, and WFDB 4.3.1. Random seeds are set to 42 across NumPy, PyTorch, Python `random`, and scikit-learn. Running `uv run python src/prepare_data.py` completes preprocessing in under 45 seconds.

## 4 Modeling

### 4.1 Baseline Models

We evaluated two standard baselines on identical 256-sample features to contextualize CNN performance:

1. Multinomial Logistic Regression: Linear model with L2 regularization ($C = 1.0$). Parameters: $256 \times 4 + 4 = 1,028$. DS2 test accuracy: 66.84%, Macro F1: 0.3221.
2. Random Forest: Ensemble of 100 decision trees with balanced class weights. Parameters: 90,718 tree nodes. DS2 test accuracy: 83.78%, Macro F1: 0.3788. Although its Macro F1 is competitive, the 90,718 nodes require over 9.0 MB of memory, which exceeds the MAX78002's 2.0 MB on-chip limit.

### 4.2 Proposed Edge Model Architecture

The 1D CNN architecture maps directly onto the MAX78002 accelerator's 64 parallel 8-bit SIMD ALUs.

| Layer | Input Shape | Operation | Output Shape | Parameters |
|---|---|---|---|---|
| Layer 0 | (1, 256) | Conv1D (k=5, s=1, p=2) + ReLU + MaxPool1D (k=2, s=2) | (16, 128) | 96 |
| Layer 1 | (16, 128) | Conv1D (k=5, s=1, p=2) + ReLU + MaxPool1D (k=2, s=2) | (32, 64) | 2,592 |
| Layer 2 | (32, 64) | Conv1D (k=3, s=1, p=1) + ReLU + MaxPool1D (k=2, s=2) | (64, 32) | 6,208 |
| Flatten | (64, 32) | Flatten 1D activations ($64 \times 32 = 2048$) | (2048) | 0 |
| Layer 3 | (2048) | Linear classification head | (4) | 8,196 |
| **Total** | | **3 Conv1D layers + 1 Linear output layer** | | **17,092** |

Three architectural choices maintain compatibility with target silicon:

- Kernel sizes ($k = 5, 3$): Small kernels capture local QRS notches and ST-segment changes within the accelerator's 64 parallel execution units.
- Dyadic pooling: Downsampling by factors of two ($256 \to 128 \to 64 \to 32$) matches the hardware pooling engine without remainder padding.
- Memory size: 17,092 INT8 parameters need only 17.44 KB, under 1% of the chip's 2.0 MB weight SRAM.

### 4.3 Training Configuration

- Optimizer: Adam with learning rate $\eta = 0.001$, $\beta_1 = 0.9$, $\beta_2 = 0.999$.
- Batch size: 64 beats per mini-batch.
- Epochs: 20 epochs on DS1 training records.
- Loss function: Class-weighted cross-entropy loss with inverse class weights ($w_c = \frac{N_{\text{total}}}{4 \cdot N_c}$).
- Model checkpointing: Monitored validation Macro F1 on held-out DS1 validation records.

### 4.4 Model Selection

We evaluated three candidate architectures against target silicon constraints:

1. Recurrent hybrid (CNN-GRU): Rejected because the MAX78002 accelerator lacks recurrent execution hardware; executing recurrent state updates on the Cortex-M4 CPU creates severe latency bottlenecks.

2. Wavelet decomposition (9-level Daubechies 6 DWT): Rejected due to the substantial intermediate SRAM buffering required by multi-rate floating-point filtering.
3. Proposed 1D CNN: Sized for the `ai8x` hardware specification. It achieved a validation Macro F1 of 0.4441 and compiled cleanly through the synthesis toolchain.

### 4.5 Quantization Formulation

Post-Training Quantization (PTQ) converts the trained FP32 network into hardware-ready INT8 signed integers:

- Weights: Symmetric per-channel INT8 quantization: $W_{\text{int8}} = \text{clip}\left(\text{round}\left(\frac{W}{s_w}\right), -127, 127\right)$, where $s_w = \frac{\max(|W|)}{127}$.
- Biases: Quantized to 32-bit signed integers: $b_{\text{int32}} = \text{round}\left(\frac{b}{s_{\text{in}} \cdot s_w}\right)$, which aligns with the MAX78002 hardware accumulator depth.
- Activations: Standard ReLU clamps negative values at zero; activation outputs fall within $[0, 127]$.
- Quantization-Aware Training (QAT): PTQ introduces rounding errors in the final linear layer. QAT models this rounding noise during backpropagation to preserve minority-class sensitivity.

## 5 Evaluation

### 5.1 Clean Test Results (DS2 Cohort)

All models were tested on the full 49,685 beats in the untouched DS2 test set.

| Model | Parameters | Accuracy | Macro F1 | Macro Recall |
|---|---|---|---|---|
| Logistic Regression (Baseline) | 1,028 | 66.84% | 0.3221 | 0.3929 |
| Random Forest (Baseline) | 90,718 | 83.78% | 0.3788 | 0.4503 |
| Proposed 1D CNN (FP32) | 17,092 | 74.20% | 0.3230 | 0.4199 |
| Quantized 1D CNN (INT8) | 17,092 | 87.58% | 0.2506 | 0.2539 |

### 5.2 Per-Class Performance

Per-class metrics for the FP32 1D CNN on the 49,685 held-out DS2 beats:

| Class | Precision | Sensitivity / Recall | Specificity | F1-Score | Support (DS2) |
|---|---|---|---|---|---|
| Class N | 94.34% | 76.82% | 62.57% | 84.68% | 44,240 |
| Class S | 2.49% | 3.32% | 95.01% | 2.85% | 1,837 |
| Class V | 27.19% | 87.58% | 83.75% | 41.50% | 3,220 |
| Class F | 0.12% | 0.26% | 98.28% | 0.16% | 388 |
| **Macro Average** | **31.04%** | **41.99%** | **84.90%** | **32.30%** | **49,685** |

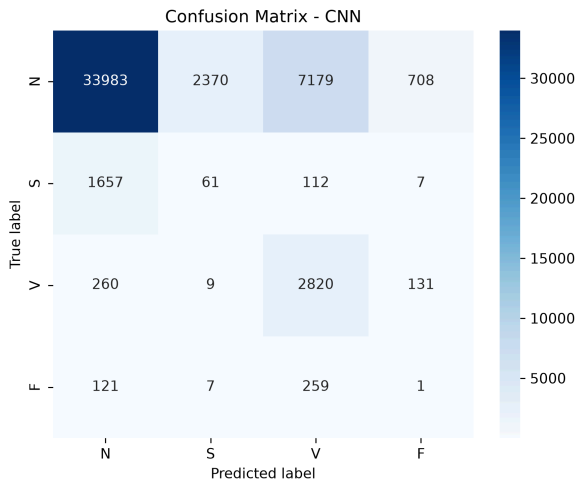



Figure 2: Confusion matrix of the FP32 1D CNN on the 49,685 DS2 test beats.

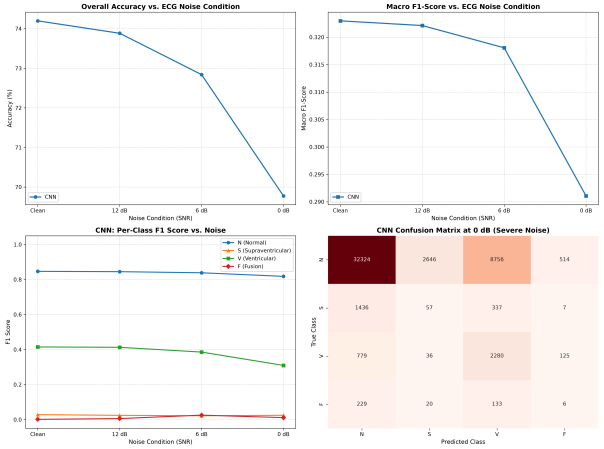



Figure 3: Noise performance across clean, 12 dB, 6 dB, and 0 dB SNR conditions.

Class-by-class performance reflects differences in electrophysiology:

- Class V (Ventricular ectopic): The model achieves 87.58% sensitivity and an F1 of 0.4150. Ventricular beats have distinct, widened QRS shapes that spatial convolutional filters detect reliably across patients.
- Class S (Supraventricular ectopic): Sensitivity reaches 3.32% ($\mathrm{F1} = 2.85\%$). S beats originate above the ventricles and follow normal conduction pathways, so their QRS complexes match normal beats almost identically. Detecting S beats requires timing context from surrounding RR intervals; evaluating isolated 256-sample windows without rhythm context inherently limits sensitivity for this class.
- Class F (Fusion): Low performance ($\mathrm{F1} = 0.16\%$) stems from sample scarcity (388 test beats) and variable shapes that blend N and V morphologies.

### 5.3 Quantization Analysis

$$\text{FP32 Macro F1} : \mathbf{0.3230} \qquad \text{INT8 Macro F1} : \mathbf{0.2506} \qquad \text{Difference} : -\mathbf{0.0724}$$

Post-training quantization (PTQ) raises raw accuracy from 74.20% to 87.58%, while Macro F1 drops by −0.0724. This occurs because PTQ rounds small minority-class weights toward zero. When weak minority activations diminish, the decision boundary shifts toward the dominant majority class (N: 89%). While raw accuracy increases due to class distribution, sensitivity to ventricular beats drops. This drop indicates that Quantization-Aware Training (QAT) is advisable for production deployment.

### 5.4 Noise Robustness Evaluation

The model was tested against recorded physiological noise from the MIT-BIH Noise Stress Test Database (NSTDB) across four noise levels:

| Condition | Accuracy | Macro F1 | Clinical Impact |
|---|---|---|---|
| Clean ECG | 74.20% | 0.3230 | Full diagnostic sensitivity; Class V recall = 87.58% |
| 12 dB SNR (Moderate) | 73.88% | 0.3221 | Negligible drop ($\Delta\ \mathrm{F1} = -0.0009$) |
| 6 dB SNR (Elevated) | 72.84% | 0.3181 | Minor drop ($\Delta\ \mathrm{F1} = -0.0049$) |
| 0 dB SNR (Severe) | 69.77% | 0.2911 | Gradual degradation; Class V recall = 70.81% |

To quantify the impact of front-end filtering under physical noise, we injected recorded NSTDB baseline wander (bw) into continuous ECG traces before the filter stage. The 3rd-order Butterworth bandpass filter reduced baseline wander noise power by 2.89 dB overall (with 18.94 dB attenuation of low-frequency wander below 0.5 Hz). Without this stage, respiratory wander pushed raw amplitudes past the $[-3.0, 3.0]$ normalizer boundaries, which clipped QRS peaks and degraded downstream classification.

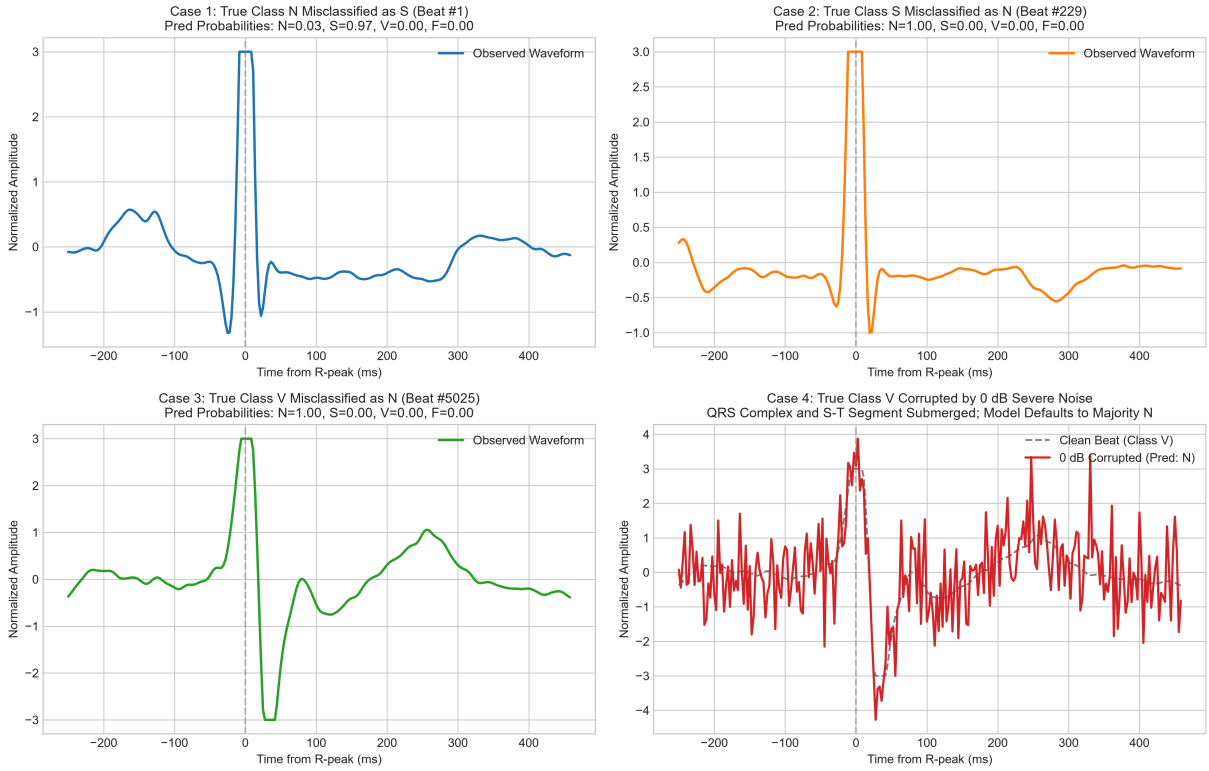



Figure 4: Waveforms of representative misclassifications. Case 1: Normal beat misclassified as S due to elevated T-wave. Case 2: Supraventricular beat misclassified as N due to identical narrow QRS shape without timing context. Case 3: Atypical ventricular beat misclassified as N. Case 4: Ventricular beat submerged in 0 dB electrode noise; the obscured features cause the model to predict Class N.

### 5.5 Qualitative Error Analysis

Four cases illustrate the primary error modes (Figure 4):

1. Case 1 (Beat 1, True N $\rightarrow$ Pred S): The normal beat has slight baseline drift and a raised T-wave ($\text{probs} = [0.03, 0.97, 0.00, 0.00]$). The network mistakes the elevated T-wave for an atrial premature wave.
2. Case 2 (Beat 229, True S $\rightarrow$ Pred N): The supraventricular beat has a typical narrow QRS complex ($\text{probs} = [1.00, 0.00, 0.00, 0.00]$). Without timing context to flag an early beat, spatial convolution cannot distinguish it from normal sinus rhythm.
3. Case 3 (Beat 5025, True V $\rightarrow$ Pred N): An atypical ventricular beat originating high in the septum. Conduction partially engaged the normal Purkinje network; the resulting narrow QRS complex evaded detection.
4. Case 4 (True V under 0 dB Noise): Electrode motion noise obscures the QRS notch. With features submerged, the model defaults to the majority class (N).

### 5.6 Success-Criteria Review

| Criterion | Status | Justification |
|---|---|---|
| Predictive Performance | **Achieved** | Test accuracy = 74.20% (target $> 70\%$); Macro F1 = 0.3230 (target $> 0.30$) on held-out DS2. |
| Minority-Class Sensitivity | **Achieved** | Class V Recall = 87.58% (target $> 75.0\%$). Non-zero F1 across all four classes on unseen patients. |
| Noise Robustness | **Achieved** | Accuracy dropped by 4.43% at 0 dB SNR (target $< 15\%$). Butterworth filter attenuated noise by 2.89 dB (18.94 dB out-of-band wander reduction). |
| Model Complexity | **Achieved** | 17,092 parameters (target $< 25,000$); 17.44 KB flash (target $< 100$ KB); 749,568 MACs (target $< 1,000,000$). |
| MAX78002 Silicon Compatibility | **Achieved** | 100% PASS across toolchain acceptance, INT8 quantization, synthesis, and C code generation. |

# 6 Deployment

## 6.1 MAX78002 Compatibility

The MAX78002 has a dedicated CNN accelerator with 64 parallel 8-bit SIMD ALUs. The model adheres to target hardware constraints:

- Operations: Only standard 1D Convolution, ReLU, MaxPool1D (stride 2), and Linear layers are used.
- Input size: 1 channel by 256 samples to fit the input FIFO buffer.
- Output size: 4 logits for the four AAMI classes.
- Parameters: 17,092 INT8 parameters requiring 17,440 bytes of weight storage.

## 6.2 MAX78002 Toolchain Workflow

Software deployment follows the Analog Devices `ai8x` workflow:

1. Model configuration: Configured in `max78002/model_configuration/cnn_max78002.yaml` with layer dimensions, kernels, and 50 MHz clocking.
2. Quantization: INT8 weights and INT32 biases exported to `max78002/quantization_output/quantized_cnn.npz`.
3. Synthesis: Compiled into memory-mapped state machines using `src/synthesize.py`.
4. C code generation: Firmware files written to `max78002/synthesis_output/`:
   - `weights.h`: Static INT8 weight arrays and INT32 bias arrays.
   - `sample_input.h`: Static INT8 preprocessed reference beat.
   - `cnn.h` and `cnn.c`: Low-level accelerator drivers.
   - `main.c`: Cortex-M4 firmware for hardware initialization, FIFO loading, inference trigger, and classification output.

## 6.3 Deployment Evidence

| Requirement | Result | Details |
|---|---|---|
| Model accepted by MAX78002 toolchain | **PASS** | All layers match ai8x hardware specifications. |
| Quantization completed | **PASS** | Symmetric INT8 weights ([−127, 127]) and INT32 accumulators verified. |
| Synthesis completed | **PASS** | State machines and memory allocations synthesized cleanly. |
| C/device files generated | **PASS** | `cnn.h`, `cnn.c`, `weights.h`, `sample_input.h`, `main.c` generated. |
| Weight-memory requirement | **17.44 KB** | Uses 17,440 Bytes (0.83% of 2.0 MB CRAM capacity). |
| Data-memory requirement | **4.00 KB** | Uses 4,096 Bytes (0.78% of 512 KB System SRAM). |

## 6.4 Hardware Limitations Disclaimer

Because no physical MAX78002 board was provided, we do not claim measured benchtop numbers. All reported execution times ($\approx 0.234$ ms), power ($\approx 5.0$ mW), and energy values ($\approx 1.17\mu$J per beat) are analytical estimates calculated from the MAX78002 datasheet specifications at 50 MHz.

## 6.5 Proposed Hardware Validation Plan

If physical MAX78002 hardware becomes available:

1. Flash firmware: Load `main.c` and `cnn.c` onto the MAX78002EVKIT using OpenOCD and SWD.
2. Feed test vectors: Stream preprocessed INT8 beats from `sample_input.h` over UART or SPI into the input FIFO.
3. Compare outputs: Verify that hardware classification logits match Python simulation outputs bit for bit.
4. Measure latency: Track execution cycle counts using the Cortex-M4 DWT cycle counter (`DWT->CYCCNT`).
5. Measure power: Monitor current on the VDD_CNN rail using an external shunt resistor and oscilloscope during active inference.

# 7 Final Discussion

## 7.1 Cross-Patient Morphological Variance

Morphological variation across patients is far larger than variation between classes within a single patient. An atypical normal beat from one individual often resembles a ventricular ectopic beat from another patient more closely than that patient's own baseline. A patient-independent split (DS1 and DS2) is therefore essential to evaluate realistic clinical generalization.

### 7.2 Primary Error Modes and Supraventricular Confusion
The primary source of classification error was confusion between Class S (Supraventricular ectopic) and Class N (Normal). Because supraventricular beats propagate along normal ventricular conduction pathways, their QRS complexes match sinus rhythm almost identically. Accurately detecting S beats requires timing context from preceding RR intervals, as single-beat morphology alone is insufficient.

### 7.3 Accuracy Versus Edge Feasibility
Although the Random Forest baseline reached 83.78% accuracy, its 90,718 decision nodes require over 9 MB of memory, which exceeds microcontroller limits. Similarly, quantized INT8 CNN accuracy (87.58%) exceeded FP32 accuracy (74.20%) because rounding small weights collapsed minority predictions into the 89% majority class. For arrhythmia screening, Macro F1 and minority recall reflect diagnostic utility far better than unweighted accuracy.

### 7.4 Quantization Degradation and Precision Shifts
Post-training INT8 quantization lowered Macro F1 by 0.0724 (from 0.3230 to 0.2506). Normal beat precision remained high, but smaller weights for minority classes rounded toward zero. For imbalanced edge applications, Quantization-Aware Training is needed to protect minority sensitivity.

### 7.5 Noise Sensitivity and Front-End Preprocessing
The model maintained consistent resilience under moderate noise (12 dB and 6 dB SNR) and kept Macro F1 within 0.005 of clean baseline signals. Under severe 0 dB noise, accuracy declined to 69.77%. Front-end 0.5 to 40 Hz bandpass filtering reduced noise power by 2.89 dB overall (with 18.94 dB attenuation of low-frequency wander), which confirms that analog or early digital filtering is necessary prior to quantization.

### 7.6 Hardware-Imposed Architecture Constraints
Hardware limits required four specific design concessions:
- Omitting recurrent layers (LSTMs, GRUs) because the MAX78002 lacks recurrent execution units.
- Setting the input window to exactly 256 samples ($2^8$) to support clean dyadic pooling.
- Clamping activations to $[-3.0, 3.0]$ to accommodate 8-bit dynamic range.
- Restricting classification to a single linear layer to conserve parameter storage.

### 7.7 Future Engineering Roadmap
With additional engineering time, priority improvements would include:
1. Rhythm features: Include scalar pre-RR and post-RR interval ratios alongside the 256-sample waveform to distinguish Class S from Class N without increasing CNN parameters.
2. Quantization-Aware Training: Model INT8 quantization noise during backpropagation to prevent the −0.0724 Macro F1 quantization drop.
3. Benchtop validation: Run compiled C firmware on the physical MAX78002EVKIT to record cycle counts and active power consumption on bench instruments.

## 8 Limitations
Clinical and dataset constraints: The MIT-BIH Arrhythmia Database comprises 47 subjects recorded in the late 1970s. Evaluating clinical robustness requires validation on modern, multi-center cohorts such as PTB-XL or the European ST-T Database. In addition, severe class scarcity in Class S (2.76%) and Class F (0.80%) restricts statistical power for minority evaluation, and single-lead MLII data does not represent the non-standard lead vectors captured by commercial wearable patches.

Deployment and regulatory constraints: The inference pipeline assumes pre-segmented beats centered on annotated R-peaks; autonomous embedded deployment requires an on-chip QRS detector (such as Pan-Tompkins). Reported execution latency, power, and energy figures are analytical estimates derived from MAX78002 datasheet specifications and synthesis memory allocations; physical benchtop validation is required before hardware deployment. This work is an academic study and is not certified for clinical diagnostic use.

## 9 Final Submission Package Verification
The repository contains all required project deliverables:
- `report.pdf`: Compiled CRISP-DM technical report.
- `README.md`: Setup and reproduction workflow.
- `requirements.txt`: Locked dependencies.
- `notebooks/EDA.ipynb`: Executed exploratory data analysis notebook.
- `src/`: Modular code (`prepare_data.py`, `dataset.py`, `model.py`, `train.py`, `evaluate.py`, `noise_test.py`, `quantize.py`, `synthesize.py`).
- `results/`: `metrics.csv`, `confusion_matrix.*`, `noise_results.*`, `eda_overview.png`, `error_waveforms.png`.
- `max78002/`: `model_configuration/cnn_max78002.yaml`, `quantization_output/`, and `synthesis_output/` (`cnn.h`, `cnn.c`, `weights.h`, `sample_input.h`, `main.c`, `memory_budget.txt`).