



## A high-end 27" monitor featuring AMVA+ Panel technology

ProLite X2783HSU - a 27" LED backlit LCD Screen featuring AMVA+ panel technology, guarantees accurate and consistent colour reproduction with wide viewing angles. Offering 24 bit 'True Colour' and great performance for displaying Black and White with the 3000:1 Native Contrast Ratio, means that the ProLite X2783HSU will provide excellent performance for Photographic, Design and Web-design. With the added support of a Low Power LED Panel, the iiyama ProLite X2783HSU is also an excellent choice for Universities, Corporate and Financial Markets.



### AMVA+

AMVA+ Panel technology offers 24 bit 'True Colour' performance and amazing viewing angles.



### Flicker-free + Blue light

The ultimate solution for the comfort and health of your eyes. Flicker-free monitors with the blue light reducer function substantially reduce the strain and fatigue caused by flickering and blue light emittance of regular monitors.

## 01 DISPLAY CHARACTERISTICS

|                     |                                                                       |
|---------------------|-----------------------------------------------------------------------|
| Diagonal            | 27", 68,6cm                                                           |
| Panel               | AMVA+ LED, matte finish                                               |
| Native resolution   | 1920 x 1080 (2.1 megapixel Full HD)                                   |
| Aspect ratio        | 16:9                                                                  |
| Panel brightness    | 300 cd/m <sup>2</sup>                                                 |
| Static contrast     | 3 000:1                                                               |
| Advanced contrast   | 80M:1                                                                 |
| Response time (GTG) | 4ms                                                                   |
| Viewing zone        | horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89° |
| Colour support      | 16.7mIn 8bit (sRGB: 99%; NTSC: 72%)                                   |
| Horizontal Sync     | 30 - 80kHz                                                            |
| Viewable area W x H | 597.6 x 336.2mm, 23.5 x 13.2"                                         |
| Pixel pitch         | 0.311mm                                                               |
| Colour              | matte                                                                 |

## 02 INTERFACES / CONNECTORS / CONTROLS

|                     |                                     |
|---------------------|-------------------------------------|
| Signal input        | VGA x1<br>HDMI x1<br>DisplayPort x1 |
| USB HUB             | x2 (v.2.0)                          |
| HDCP                | yes                                 |
| Headphone connector | yes                                 |

## 03 FEATURES

|                    |                                                                                                                                                                                                                                                                                                                                                           |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Blue light reducer | yes                                                                                                                                                                                                                                                                                                                                                       |
| Flicker free       | yes                                                                                                                                                                                                                                                                                                                                                       |
| OSD languages      | EN, DE, FR, ES, IT, CN, RU, JP, CZ, NL, PL                                                                                                                                                                                                                                                                                                                |
| Control buttons    | Power, Menu/ Select, Scroll up/ Volume, Scroll down/ ECO, Exit, Input Select                                                                                                                                                                                                                                                                              |
| User controls      | picture adjust (contrast, brightness, OD, ACR, ECO, Blue Light Reducer), input select, audio adjust (volume, mute, digital audio), colour adjust, image adjust (auto adjust, H. position, V. position, clock, phase, sharpness, video mode adjust), language, setup (OSD position, OSD timeout, opening logo, auto power off), display information, reset |
| Speakers           | 2 x 2W                                                                                                                                                                                                                                                                                                                                                    |
| Convenience        | Kensington-lock™ prepared, DDC2B, Mac OSX                                                                                                                                                                                                                                                                                                                 |

## 04 MECHANICAL

|                              |                 |
|------------------------------|-----------------|
| Display position adjustments | tilt            |
| Tilt angle                   | 22° up; 5° down |
| VESA mounting                | 100 x 100mm     |

## 05 ACCESSORIES INCLUDED

|        |                                 |
|--------|---------------------------------|
| Cables | power, USB, HDMI                |
| Other  | quick start guide, safety guide |

## 06 POWER MANAGEMENT


|                   |                                            |
|-------------------|--------------------------------------------|
| Power supply unit | internal                                   |
| Power supply      | AC 100 - 240V, 50/60Hz                     |
| Power usage       | 28W typical, 0.4W stand by, 0.35W off mode |

## 07 SUSTAINABILITY

|                                                     |                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-----------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Regulations                                         | TCO Certified, CE, TÜV-GS, EAC, VCCI-B, PSE, RoHS support, ErP, WEEE, REACH, ENERGY STAR®                                                                                                                                                                                                                                                                                                                                    |
| Energy efficiency class (Regulation (EU) 2017/1369) | F                                                                                                                                                                                                                                                                                                                                                                                                                            |
| EPEAT Silver                                        | EPEAT is a comprehensive environmental rating that helps identify greener computers and other electronic equipment. The Silver certification means the monitor meets all required criteria plus at least 50% of the optional requirements. EPEAT Silver is valid in countries where iiyama registers the product. Please visit <a href="http://www.epeat.net">www.epeat.net</a> for the registration status in your country. |
| REACH SVHC                                          | above 0.1%: Lead                                                                                                                                                                                                                                                                                                                                                                                                             |

## 08 DIMENSIONS / WEIGHT

|                              |                     |
|------------------------------|---------------------|
| Product dimensions W x H x D | 622.5 x 446 x 218mm |
| Box dimensions W x H x D     | 692 x 446 x 128mm   |
| Weight (without box)         | 4.4kg               |
| EAN code                     | 4948570115594       |

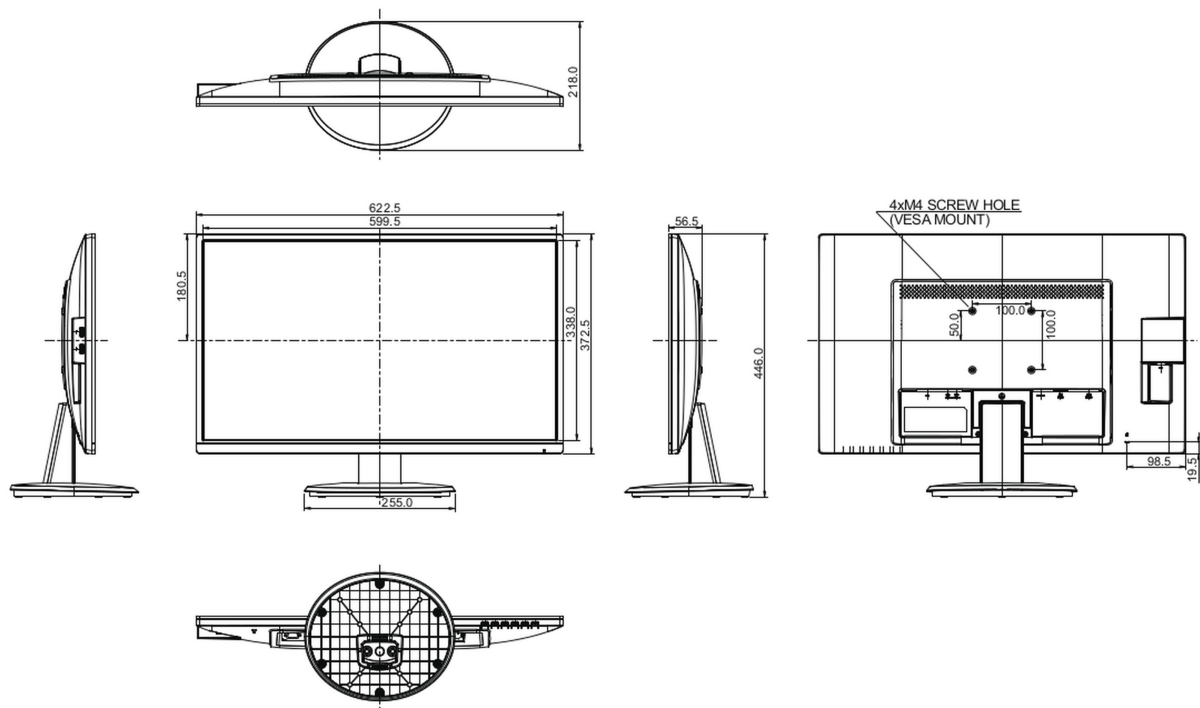

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.