



## 15.6" Full HD PCAP 10 point touch monitor with edge-to-edge glass, IPS Panel Technology and touch through glass function

The ProLite T1634MC-B8X uses projective capacitive touch technology, built into an eye catching bezel with edge-to-edge glass. Featuring IPS Panel Technology and Full HD (1920x1080) resolution, it offers natural, highly accurate colours and wide viewing angles. In addition to the superb image quality, the screen comes with an IP65 rating, which means the screen and bezel is totally dust and water resistant, making it a perfect solution for demanding environments. The Touch-Through-Glass function guarantees a seamless and accurate touch response for interactive behind-glass-retail applications.



### IPS Technology

IPS displays are best known for wide viewing angles and natural, highly accurate colours. They are especially suited for colour-critical applications.



### Touch through-glass

This through glass touch screen works right through glass and can turn glass surfaces into an interactive touch screen display. Use it on storefront windows, real estate office, in-store for POS or restaurants.

## 01 DISPLAY CHARACTERISTICS

|                         |                                                                       |
|-------------------------|-----------------------------------------------------------------------|
| Design                  | Edge to edge glass                                                    |
| Diagonal                | 15.6", 39.5cm                                                         |
| Panel                   | IPS Panel Technology LED                                              |
| Native resolution       | 1920 x 1080 @60Hz (2.1 megapixel)                                     |
| Aspect ratio            | 16:9                                                                  |
| Panel brightness        | 450 cd/m <sup>2</sup>                                                 |
| Brightness              | 405 cd/m <sup>2</sup> with touch                                      |
| Light transmittance     | 90%                                                                   |
| Static contrast         | 700:1 with touch                                                      |
| Response time (GTG)     | 25ms                                                                  |
| Viewing zone            | horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89° |
| Colour support          | 16.2mIn (6bit + Hi-FRC)                                               |
| Horizontal Sync         | 30 - 84kHz                                                            |
| Viewable area W x H     | 344.2 x 193.6mm, 13.6 x 7.6"                                          |
| Pixel pitch             | 0.179mm                                                               |
| Bezel colour and finish | black, matte                                                          |

## 02 TOUCH

|                             |                                                                                                                                                                                                                         |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Touch technology            | projective capacitive                                                                                                                                                                                                   |
| Touch points                | 10 (HID, only with supported OS)                                                                                                                                                                                        |
| Touch method                | stylus, finger, glove (latex)                                                                                                                                                                                           |
| Touch interface             | USB                                                                                                                                                                                                                     |
| Supported operating systems | All iiyama monitors are Plug & Play and compatible with Windows and Linux. For details regarding the supported OS for the touch models, please refer to the driver instruction file available in the downloads section. |
| Through-Glass               | 6mm                                                                                                                                                                                                                     |
| Palm rejection              | yes                                                                                                                                                                                                                     |

## 03 INTERFACES / CONNECTORS / CONTROLS

|                      |                           |
|----------------------|---------------------------|
| Analog signal input  | VGA x1                    |
| Digital signal input | HDMI x1<br>DisplayPort x1 |
| HDCP                 | yes                       |

## 04 FEATURES

|                           |                                               |
|---------------------------|-----------------------------------------------|
| Extra                     | Anti-fingerprint coating, touch through-glass |
| Glass thickness           | 2.4mm                                         |
| Glass hardness            | 7H                                            |
| Water and dust protection | IP65 (front)                                  |
| OSD key lock              | yes                                           |

## 05 GENERAL

|                 |                                                                   |
|-----------------|-------------------------------------------------------------------|
| OSD languages   | EN, DE, FR, ES, IT, CN, JP                                        |
| Control buttons | Menu, Scroll up/ Brightness, Scroll down/ Contrast, Select, Power |

## User controls

picture (contrast, brightness, H-position, V-position, phase, clock, auto adjust), advanced (color temp., sharpness), OSD (timeout, position, H-position, V-position, touch switch), option (reset, language, source select, display mode, factory)

## Plug&Play

DDC2B

## 06 MECHANICAL

### Orientation

landscape, face-up

### Tilt angle

90° up; 5° down

### VESA mounting

100 x 100mm

## 07 ACCESSORIES INCLUDED

### Cables

power, USB, HDMI, DP

### Guides

quick start guide, safety guide

### Other

AC adapter

## 08 POWER MANAGEMENT

### Power supply unit

external

### Power supply

DC 12 V

### Power usage

18W typical, 1.5W stand by, 0.3W off mode

## 09 SUSTAINABILITY

### Regulations

CE, EAC, RoHS support, ErP, WEEE, cULus, REACH

### Energy efficiency class (Regulation (EU) 2017/1369)

F

### REACH SVHC

above 0.1%: Lead

## 10 DIMENSIONS / WEIGHT

### Product dimensions W x H x D

381 x 315.5 x 253.5mm

### Box dimensions W x H x D

455 x 365 x 290mm

### Weight (without box)


3.9kg

### Weight (with box)

5.8kg

### EAN code

4948570118335

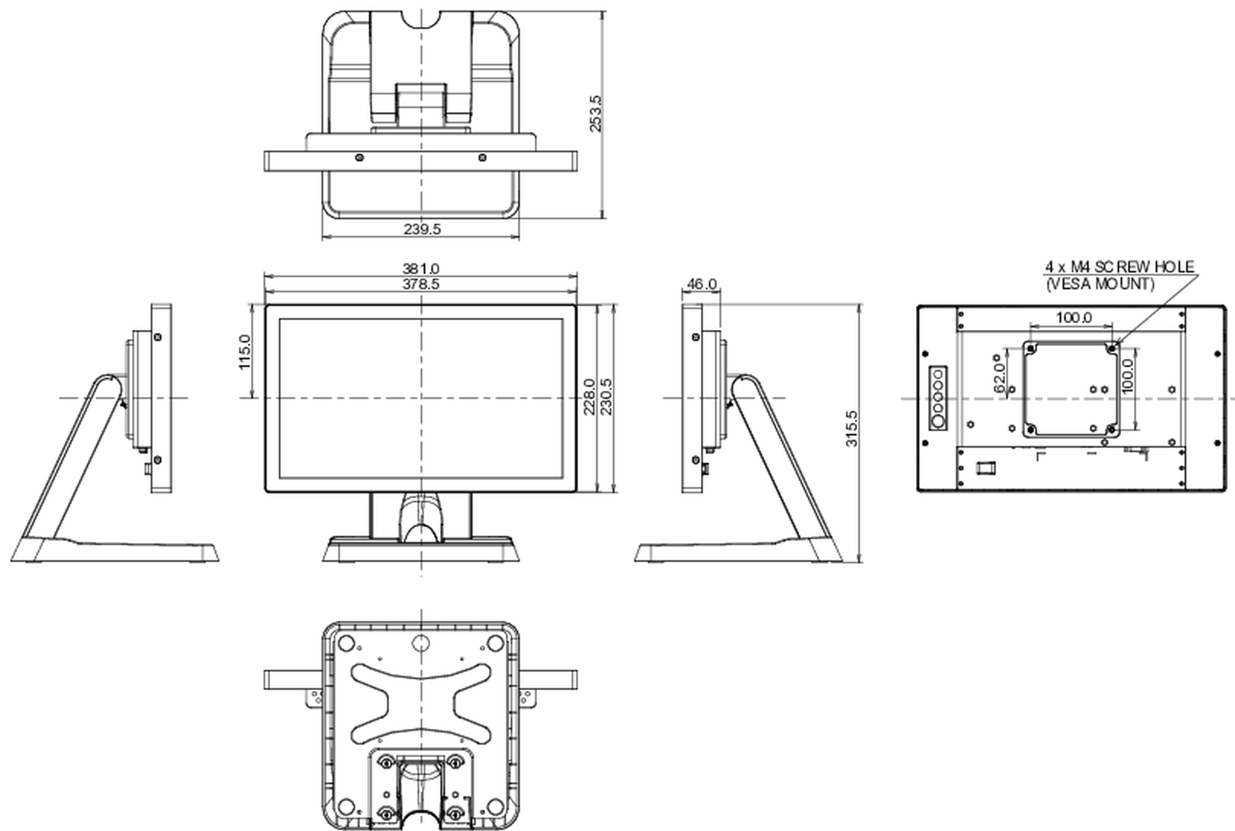

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED