


AF-H7E Lite

User Guide



AF-H7E Lite Overview

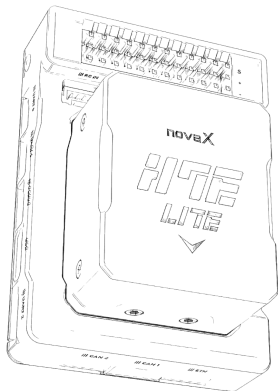


Compact carrier flight controller that reuses the AF-H7E sensor module (in development). The pin definition may change before release.

AF-H7E Lite Pinout

• Pinout

AF-H7E Lite — Pinout (Top View)

Concept layout - pin order as seen from above - side connectors sit on the bottom side and plug in from the edges (shown through the PCB)

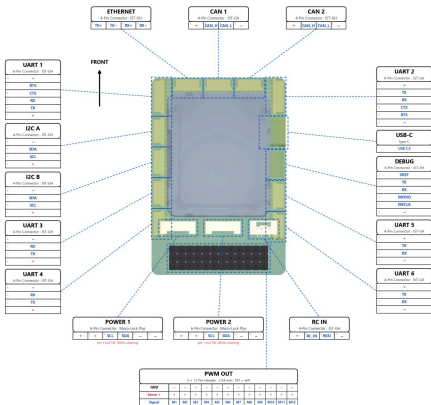

AF-H7E Lite Pinout

• Pinout Notes

Preliminary pin definition — AF-H7E Lite is in development and connectors may change before release. On every JST connector pin 1 is the supply pin and the last pin is GND, following the Pixhawk connector standard. UART n maps to ArduPilot SERIALn: UART 1–2 default to MAVLink telemetry and UART 3–4 default to GPS. GPS modules connect to any UART or over DroneCAN; there is no dedicated GPS/safety port and no safety switch. On-board without a connector: microSD card slot (logging), buzzer and RGB status LED. The + rail of the PWM header is not powered by the flight controller. As on AF-H7E, the PWM signal row (S) is the rearmost row: the case has a keyed comb behind it so servo plugs only fit with S at the rear, and a wall separates POWER 1 · POWER 2 · RC IN from the PWM header. The pinout image is a top view of the concept carrier: side connectors are mounted on the bottom side and plug in from the edges, and each table lists pins in the order they sit when seen from above. POWER 1 and POWER 2 use the same Molex Micro-Lock Plus connector as AF-H7E; their pin-1 end is still to be confirmed.

AF-H7E Lite Pin Definition

• POWER 1

Molex Micro-Lock Plus 6P (1.25 mm) · same as AF-H7E ·
Primary power input

Pin	Signal	Function
1	VCC_IN	5 V supply input from the power module
2	VCC_IN	5 V supply input from the power module
3	SCL	Power-module I2C clock (voltage / current monitor)
4	SDA	Power-module I2C data (voltage / current monitor)
5	GND	Ground
6	GND	Ground

AF-H7E Lite Pin Definition

• POWER 2

Molex Micro-Lock Plus 6P (1.25 mm) · same as AF-H7E ·
Redundant power input

Pin	Signal	Function
1	VCC_IN	5 V supply input from the second power module
2	VCC_IN	5 V supply input from the second power module
3	SCL	Power-module I2C clock (voltage / current monitor)
4	SDA	Power-module I2C data (voltage / current monitor)
5	GND	Ground
6	GND	Ground

AF-H7E Lite Pin Definition

• UART 1

JST-GH 6P · SERIAL1 · UART7 · default MAVLink2

Pin	Signal	Function
1	VCC	5 V output
2	TX	UART transmit (FC → device)
3	RX	UART receive (device → FC)
4	CTS	Clear to send — hardware flow control input
5	RTS	Request to send — hardware flow control output
6	GND	Ground

AF-H7E Lite Pin Definition

• UART 2

JST-GH 6P · SERIAL2 · UART5 · default MAVLink2

Pin	Signal	Function
1	VCC	5 V output
2	TX	UART transmit (FC → device)
3	RX	UART receive (device → FC)
4	CTS	Clear to send — hardware flow control input
5	RTS	Request to send — hardware flow control output
6	GND	Ground

• UART 3

JST-GH 4P · SERIAL3 · USART1 · default GPS

Pin	Signal	Function
1	VCC	5 V output
2	TX	UART transmit (FC → device)
3	RX	UART receive (device → FC)
4	GND	Ground

AF-H7E Lite Pin Definition

• UART 4

JST-GH 4P · SERIAL4 · UART8 · default GPS

Pin	Signal	Function
1	VCC	5 V output
2	TX	UART transmit (FC → device)
3	RX	UART receive (device → FC)
4	GND	Ground

• UART 5

JST-GH 4P · SERIAL5 · USART2

Pin	Signal	Function
1	VCC	5 V output
2	TX	UART transmit (FC → device)
3	RX	UART receive (device → FC)
4	GND	Ground

AF-H7E Lite Pin Definition

• UART 6

JST-GH 4P · SERIAL6 · UART4

Pin	Signal	Function
1	VCC	5 V output
2	TX	UART transmit (FC → device)
3	RX	UART receive (device → FC)
4	GND	Ground

• I2C A

JST-GH 4P · I2C2

Pin	Signal	Function
1	VCC	5 V output
2	SCL	I2C clock — external compass, rangefinder, airspeed ...
3	SDA	I2C data
4	GND	Ground

AF-H7E Lite Pin Definition

• I2C B

JST-GH 4P · I2C3

Pin	Signal	Function
1	VCC	5 V output
2	SCL	I2C clock — external compass, rangefinder, airspeed ...
3	SDA	I2C data
4	GND	Ground

• CAN 1

JST-GH 4P · CAN1 · DroneCAN

Pin	Signal	Function
1	VCC	5 V output to CAN peripherals (not a power input)
2	CAN_H	CAN bus high
3	CAN_L	CAN bus low
4	GND	Ground

AF-H7E Lite Pin Definition

• CAN 2

JST-GH 4P · CAN2 · DroneCAN

Pin	Signal	Function
1	VCC	5 V output to CAN peripherals (not a power input)
2	CAN_H	CAN bus high
3	CAN_L	CAN bus low
4	GND	Ground

• RC IN

JST-GH 4P · RC input

Pin	Signal	Function
1	VCC	5 V receiver supply
2	RC_IN	S.Bus / PPM / DSM receiver input (protocol auto-detected)
3	RSSI	RSSI input (analog or PWM)
4	GND	Ground

AF-H7E Lite Pin Definition

• ETHERNET

JST-GH 4P · 100BASE-T

Pin	Signal	Function
1	TX+	Ethernet transmit pair +
2	TX-	Ethernet transmit pair -
3	RX+	Ethernet receive pair +
4	RX-	Ethernet receive pair -

• DEBUG

JST-SH 6P · Pixhawk Debug Mini · SERIAL7 · USART3 console

Pin	Signal	Function
1	VREF	3.3 V reference for the debug probe
2	CONSOLE_TX	Debug console transmit (FC → probe)
3	CONSOLE_RX	Debug console receive (probe → FC)
4	SWDIO	SWD data — bootloader programming and firmware recovery
5	SWCLK	SWD clock
6	GND	Ground

AF-H7E Lite Pin Definition

• USB

USB Type-C · SERIAL0 · USB 2.0 Full Speed

Pin	Signal	Function
A4 B4 A9 B9	VBUS	5 V from USB — configuration and firmware update on the bench
A6 B6	D+	USB data +
A7 B7	D-	USB data -
A5 B5	CC1 / CC2	Configuration channel (device role)
A1 B1 A12 B12	GND	Ground

• PWM OUT M1-M12

2.54 mm 3 × 12 pin header · Main outputs 1-12

Pin	Signal	Function
S	M1 ... M12	Motor / servo output signal, one per channel (PWM · OneShot · DShot)
+	V_SERVO	Servo rail, bussed across all channels — supplied externally (e.g. BEC)
-	GND	Ground

AF-H7E Lite Setup

1. **Mounting** — Align the board's forward direction with the vehicle nose on a vibration-damped mount; otherwise set AHRS_ORIENTATION.
2. **Power** — Supply power within the operating range and check polarity first.
3. **Peripherals** — Connect the receiver, GPS / compass and ESCs according to the pinout.
4. **Firmware** — Load this product's novaX ArduPilot image from the catalog Web Updater; never use another board's firmware.
5. **Setup** — In Mission Planner or similar, choose the frame, calibrate accelerometer, compass and radio, and set flight modes and failsafes.

AF-H7E Lite Safety Notes

- Always remove propellers while wiring, configuring or updating firmware.
- Pull connectors by the housing, never by the wires.
- Beware of static discharge; do not operate in wet or dusty conditions.
- Product in development — the pin definition may change before release; check the latest catalog.
- Supply the PWM servo rail (+) from an external BEC.



<Detailed Manual>

novaX