

# PhD Meeting: Planning and Control

Octavio A. Villarreal Magaña

Istituto Italiano di Tecnologia, Genova, Italy

February 28th, 2017

# Outline

① Control structure

② Simulations

③ Further work


# Outline

① Control structure


② Simulations

③ Further work

# General picture

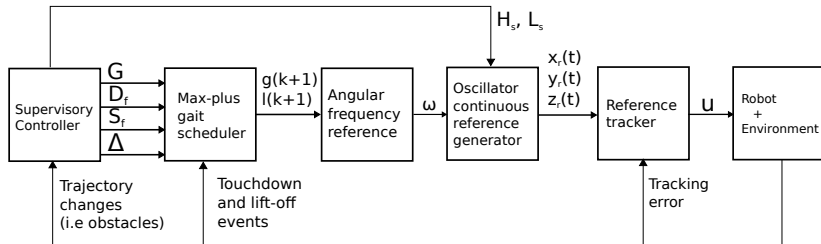

# General picture

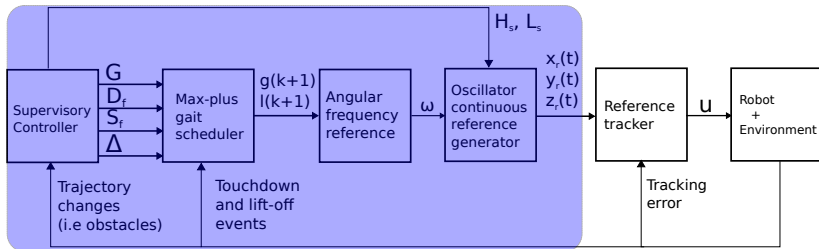

# Supervisory controller



## Main goal

Provide **time** and **geometrical** gait parameters, based on sensory data, to overcome the scenario that the robot is facing.

# Supervisory controller (continue)

Geometrical parameters:



- Step height  $H_s$
- Step length  $L_s$
- Oscillator "primitive" shape changes



# Supervisory controller (continue)

Time parameters:

- Duty factor  $D_f$
- Step frequency  $S_f$
- Gait "ordering"  $G$  (e.g.,  $G_{trot} = \{1, 4\} \prec \{2, 3\}$ )
- Time difference vector  $\Delta$






## Max-plus gait scheduler

### Main goal

Using the **time**-related gait parameters provided by the supervisory controller, generate the list of time-instants when each leg has to leave and touch the ground, so that a desired coordination is achieved.

# Max-plus gait scheduler (continue)

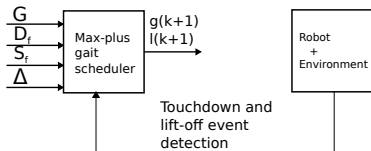


$$G_{trot} = \{1, 4\} \prec \{2, 3\}$$

$$D_f = 0.5$$

$$S_f = 0.36$$

$$\Delta = [0.2, 0.2]$$

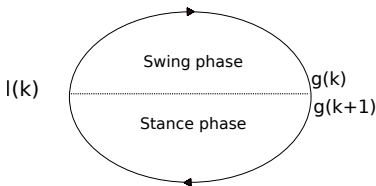

$k$	$t_1(k)$	$t_2(k)$	$t_3(k)$	$t_4(k)$	$l_1(k)$	$l_2(k)$	$l_3(k)$	$l_4(k)$
0	0	0	0	0	0	0	0	0
1	2.4	3.6	3.6	2.4	1.4	2.6	2.6	1.4
2	4.8	6.0	6.0	4.8	3.8	5.0	5.0	3.8
3	7.2	8.4	8.4	7.2	6.2	7.4	7.4	6.2
4	9.6	10.8	10.8	9.6	8.6	9.8	9.8	8.6
5	12.0	13.2	13.2	12.0	11.0	12.2	12.2	11.0

## Max-plus gait scheduler (continue)

- Systematic gait generation
- No coupling matrix  $\mathbb{C}_{ij}$
- Total cycle time analysis
- Coupling time analysis
- Not computationally expensive
- Possibility to provide "optimal" gait switching

## Angular frequency reference generator

### Main goal

Making use of the **touchdown** and **lift-off** times of the max-plus gait scheduler, provide a function for the evolution of the angular frequency of the oscillator-based reference generator.

## Angular frequency reference generator (continue)

Stance and swing period:

$$Ti_{st} = l_i(k+1) - g_i(k)$$



$$Ti_{sw} = g_i(k+1) - l_i(k+1),$$

Average angular frequency:

$$\bar{\omega} = \begin{cases} \frac{\pi}{Ti_{st}} & \text{for } t \in [g_i(k), l_i(k+1)] \\ \frac{\pi}{Ti_{sw}} & \text{for } t \in (l_i(k+1), g_i(k+1)] \end{cases}$$


Condition for the angular frequency function:

$$\frac{1}{Ti_p} \int^{Ti_p} \omega dt = \bar{\omega} \text{ for } p = st, sw.$$



# Angular frequency reference generator (continue)

$$\omega = \bar{\omega}$$

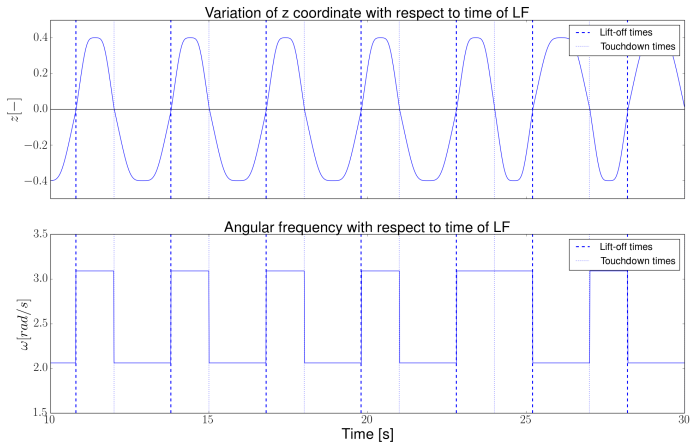

## Oscillator continuous time reference generator

### Main goal



Generate reference trajectories for each of the legs of the robot in such a way that the desired gait is achieved, according to the angular frequency obtained from the angular frequency reference generator.

# Oscillator continuous time reference generator (continue)

Oscillator equations:

$$\dot{x} = \alpha \left( 1 - \frac{16x^4}{L_s^4} - \frac{z^4}{H_s^4} \right) x + \frac{1.18\omega L_s}{2H_s^3} z^3$$

$$\dot{z} = \beta \left( 1 - \frac{16x^4}{L_s^4} - \frac{z^4}{H_s^4} \right) z - \frac{9.44\omega H_s}{L_s^3} x^3$$

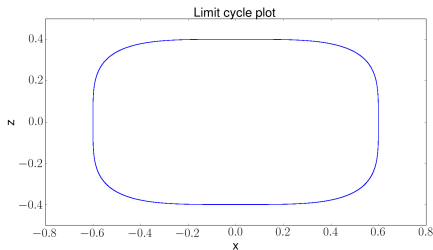



# Outline

① Control structure

② Simulations


③ Further work

## Parameters used


	$G$	$D_f$	$S_f[\frac{1}{s}]$	$\Delta[s]$
$T_1$	$\{1, 4\} \prec \{2, 3\}$	0.6	1/3	$[0.2, 0.4]$
$T_2$	$\{1, 4\} \prec \{2, 3\}$	0.4	1/3	$[-0.2, -0.4]$
$W_1$	$\{1\} \prec \{2\} \prec \{3\} \prec \{4\}$	0.6	1/3	$[-0.45, -0.45, -0.45, -0.45]$
$W_2$	$\{1\} \prec \{2\} \prec \{3\} \prec \{4\}$	0.4	1/3	$[-1.4, -0.7, -1.4, -0.7]$

# Generated motion references

Plots for gaits with different parameters

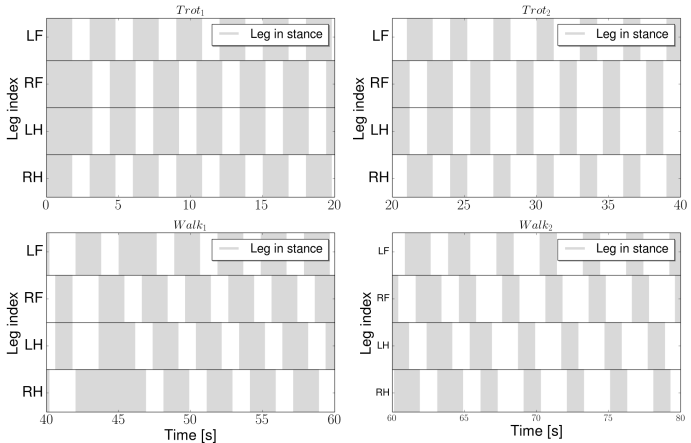

# Duty factor

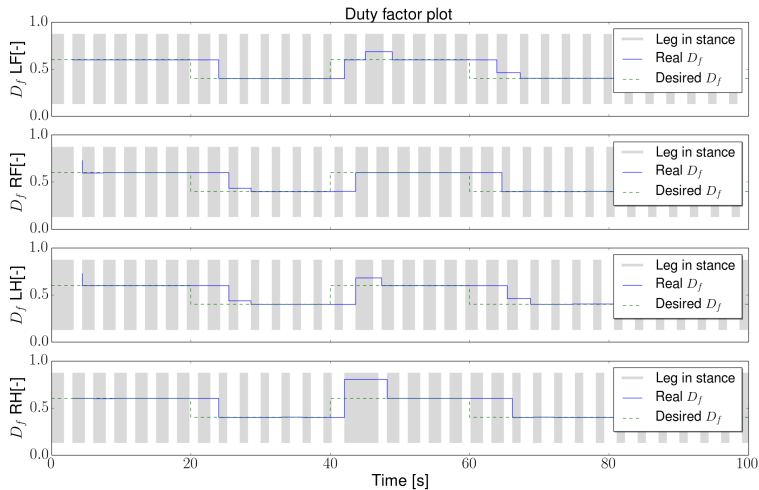

# Outline

① Control structure

② Simulations

③ Further work

## Further work

- Use the proposed strategy in the current framework
- Design angular frequency generator
- Account for disturbances in the max-plus algebra gait scheduler
- Design of supervisory parameters according to sensory information
- Design transition between one set of parameters to another

Thank you for your attention. Any questions?