
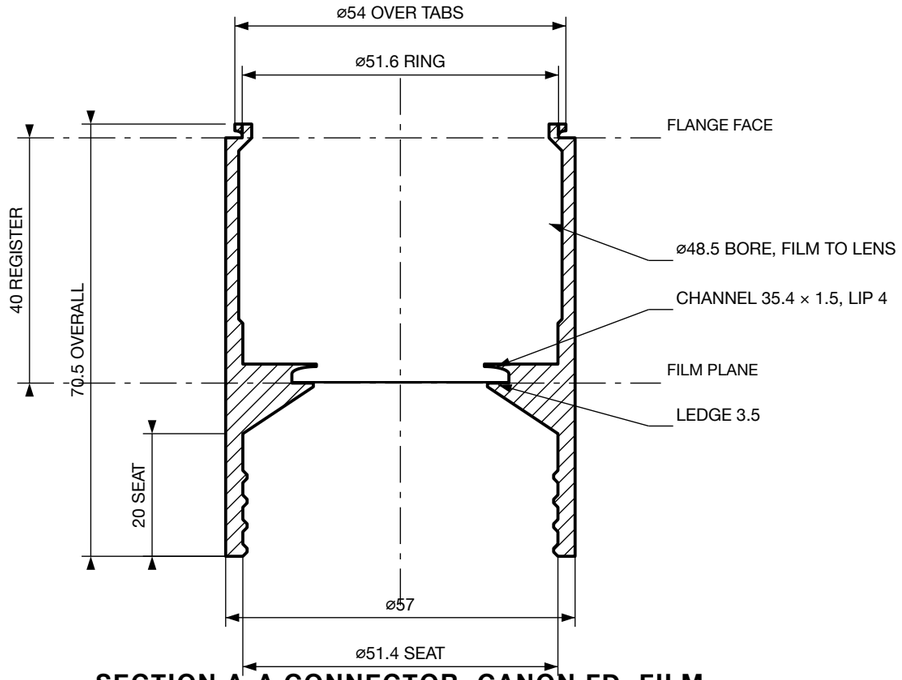



SECTION A-A CONNECTOR, CANON FD, FILM

across the film · scale 1:1

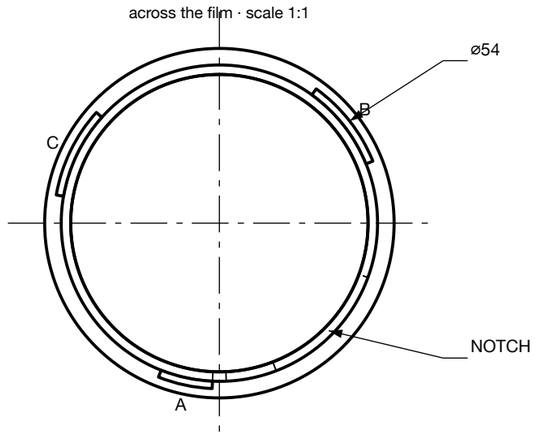


VIEW B MOUNT FACE

3 TABS, NOTCHES 1.1 DEEP DASHED

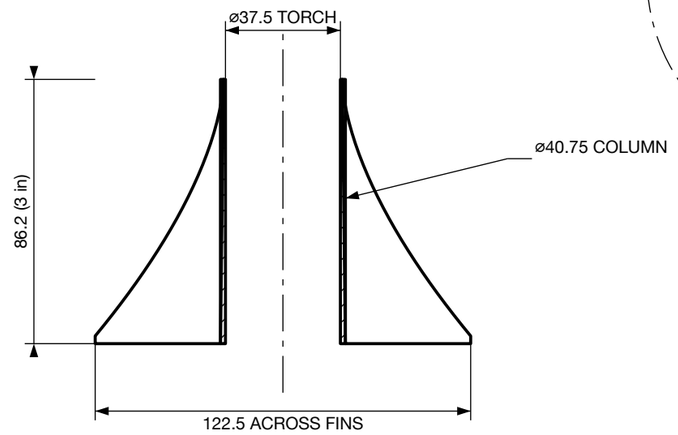

STAND ELEVATION, COLUMN SECTIONED

scale 1:2

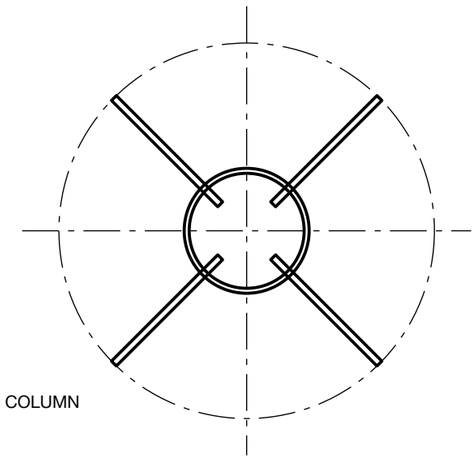

STAND PLAN

4 FINS 2.25 THICK AT 45° scale 1:2

PART	SOURCE	PRINTS AS	QTY
CONNECTOR, CANON FD, FILM	src/connector_fd_film.scad	upright, no support	1
CAP, CANON FD	src/cap_fd.scad	mouth down, no support	1
STAND	src/base.scad	upright, brim	1
FIT GAUGE, FD (D)	src/plates/plate_fd_d.scad	upright, no support	1
FIT GAUGES, FD + OM	src/plates/plate_gauges.scad	upright, no support	1

NOTES

1. Every dimension here is read from src/*.scad when the sheet is drawn. Redraw with `make schematic`.
2. REGISTER is film (the strip on its ledges) to lens flange face, and is the one dimension that must be right. Drawn 40, UNDER the nominal Canon FD 42.0: a focus ring only ever adds extension, so a short register is recovered by focusing closer and a long one is not.
3. Mount bore ø48.5, ring ø51.6, tabs ø54. Tab layout after the MakerWorld rear cap 614033, trimmed on the lens with gauges C and D (src/plates/plate_fd_d.scad). Bore 0.5 under gauge fd_d5, which fit with the bore a hair wide. Ring 2.25 above the flange face leaves 0.45 of claw clearance at the tab root.
4. Print upright as modelled, no support. Overhangs: the 1.1 mm tab undersides, the lips' quarter-ellipse undersides, and the ledge undersides, one straight ramp at 34° to the bed.
5. Olympus OM (src/connector_om.scad) is still the slide-slot body with an OM head; there is no film version yet. Register 45, socket ø47.5.

GB-1C PROJECTOR

GA-001

CONNECTOR (CANON FD) + STAND

Godin Bremond 1, Canon FD · torch → 35 mm film strip → SLR lens

SCALE	1:1 ON A3	**DRAWN**	O. BALLINGER
UNITS	MILLIMETRES	**DATE**	2026-10-01
MATERIAL	PLA, FDM 0.2 mm LAYER	**SOURCE**	src/*.scad
PRINTER	ULTIMAKER 3	**REV**	A