Mesh Radio v1 (working name) — OffGrid Devices
LoRa 902–928 MHz mesh radio, up to ~3 W; Bluetooth LE; one LiPo cell; USB-C, solar and drone power.
NDAA-ready parts list: every part from a US / EU / Japan / Taiwan / Korea / Norway maker.
Each box below is one page. Every connection is a named label; the same name is the same wire.
This drawing is generated from src/circuit.py by src/sch.py: change the code, not the drawing.

Power in: USB-C, solar, drone 5 V (each surge-clamped and fused)

USB: 22 V flat-clamp TVS, a 4.7 uF + 1 R snubber and a TPS259470A eFuse (cut-off 5.4 V, 1.5 A). Solar and drone: Schottky ideal-diode OR-ing (0.71 V drop, low heat, no reverse current).

File: inputs.kicad_sch

Charger and battery: protection, reverse polarity, battery sense

Battery: 2-cell pack, 7.4 V nominal, 8.4 V full. MAX17589 buck-boost charger (set 1.5 A, CCD ~5.8 A, SCD ~29 A, 6.6 V trickle threshold) with reverse-battery protection. Charge only when the cell is between 0 °C and 45 °C.

File: charger.kicad_sch

System power: on/off switch, 3.3 V rail

Wide 2.7–5.5 V, 2 A buck-boost (MAX77654) makes the 3.3 V rail from the battery or USB. Ideal-diode (reverse-battery FET) bypass: charging only when the cell is the highest voltage.

File: system.kicad_sch

Processor and Bluetooth: nRF52840

nRF52840 in a QFN-73 package. Bluetooth LE 5.3. Powered from the 3.3 V rail, so its pins and the SX1262 share one logic level.

File: mcu.kicad_sch

LoRa radio: SX1262, its clock, transmit match and receive balun

Semtech SX1262MB2CAS (915 MHz) reference values. TCXO on DIO3 (set 2.2 V in firmware), DIO2 drives the antenna switch.

File: radio.kicad_sch

RF front end: 15 dB pad, 3 W amplifier, filters, antenna switch, LNA

Driver: SX1262 +11 dBm -> 30 dBm (1 W), +17 dBm -> ~35 dBm (3 W). The 15.9 dB pad keeps the amplifier input matched.

File: frontend.kicad_sch

Amplifier power: battery-first supply, buck-boost, control voltage, temperature

Amplifier runs from the battery through a buck-boost (up to 22 dBm) or down to 6 dBm); firmware selects charger SYS when

File: pa_power.kicad_sch

Ports: drone (JST-GH), GPS add-on (JST-SH), expansion header, buttons, LEDs

Drone port: fitted (JST-GH 6-pin, 1.25 mm pitch). Pinout: 1 5V, 2 TX, 3 RX, 4 3V3, 5 RTS, 6 GND. Series res

File: ports.kicad_sch

Generated from src/circuit.py by src/sch.py. Edit the circuit, not this file.
OffGrid Devices


Sheet: /
File: mesh-radio.kicad_sch


Title: Mesh Radio v1 (working name)

Size: A3	Date:	**Rev: v1**
KiCad E.D.A. 10.0.7		Id: 1/9

Power in: USB–C, solar, drone 5 V (each surge–clamped and fused)

USB: 22 V flat–clamp TVS, a 4.7 uF + 1 R snubber and a TPS259470A eFuse (cut–off 5.4 V, 1.5 A).
Solar and drone: 33 V TVS and a 60 V MAX17608 (cut–off 10 V, 0.71 A, blocks –60 V and reverse current).

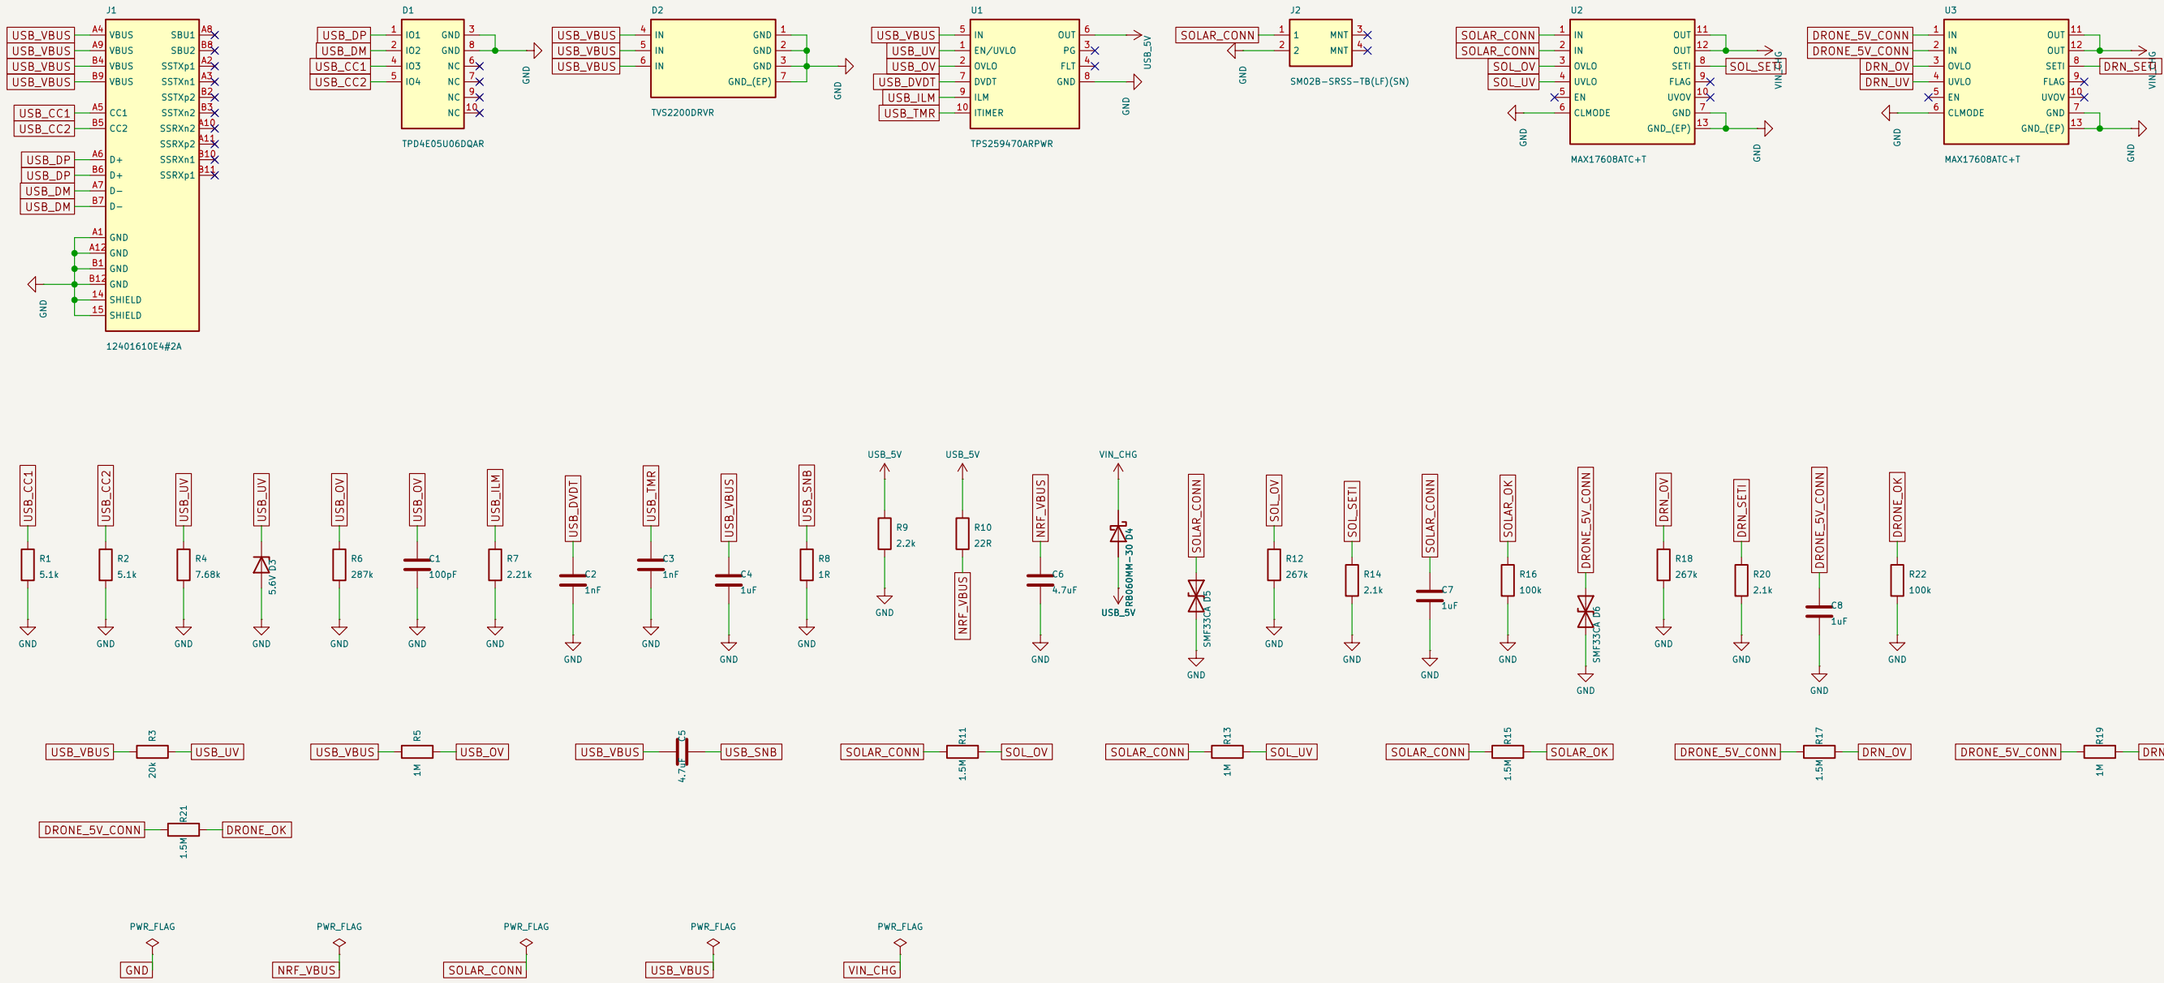



OffGrid Devices


Sheet: /Power in: USB–C, solar, drone 5 V (each surge–clamped and fused)/
File: inputs.kicad_sch

Title: Power in: USB–C, solar, drone 5 V (each surge–clamped and fused)

Size: A3	Date:	**Rev: v1**
KiCad E.D.A. 10.0.7		Id: 2/9

Charger and battery: protection, reverse polarity, battery sense

Battery plug wired the Adafruit/SparkFun way (pad 1 = +). Cell protection on the minus side (OCD ~5.8 A, SCD ~29 A, OV 4.275 V, UV 2.8 V); reverse-battery P-FET on the plus side, on only when the cell is the right way round. Charge 300 mA. Current-limited cell-to-SYS bypass.

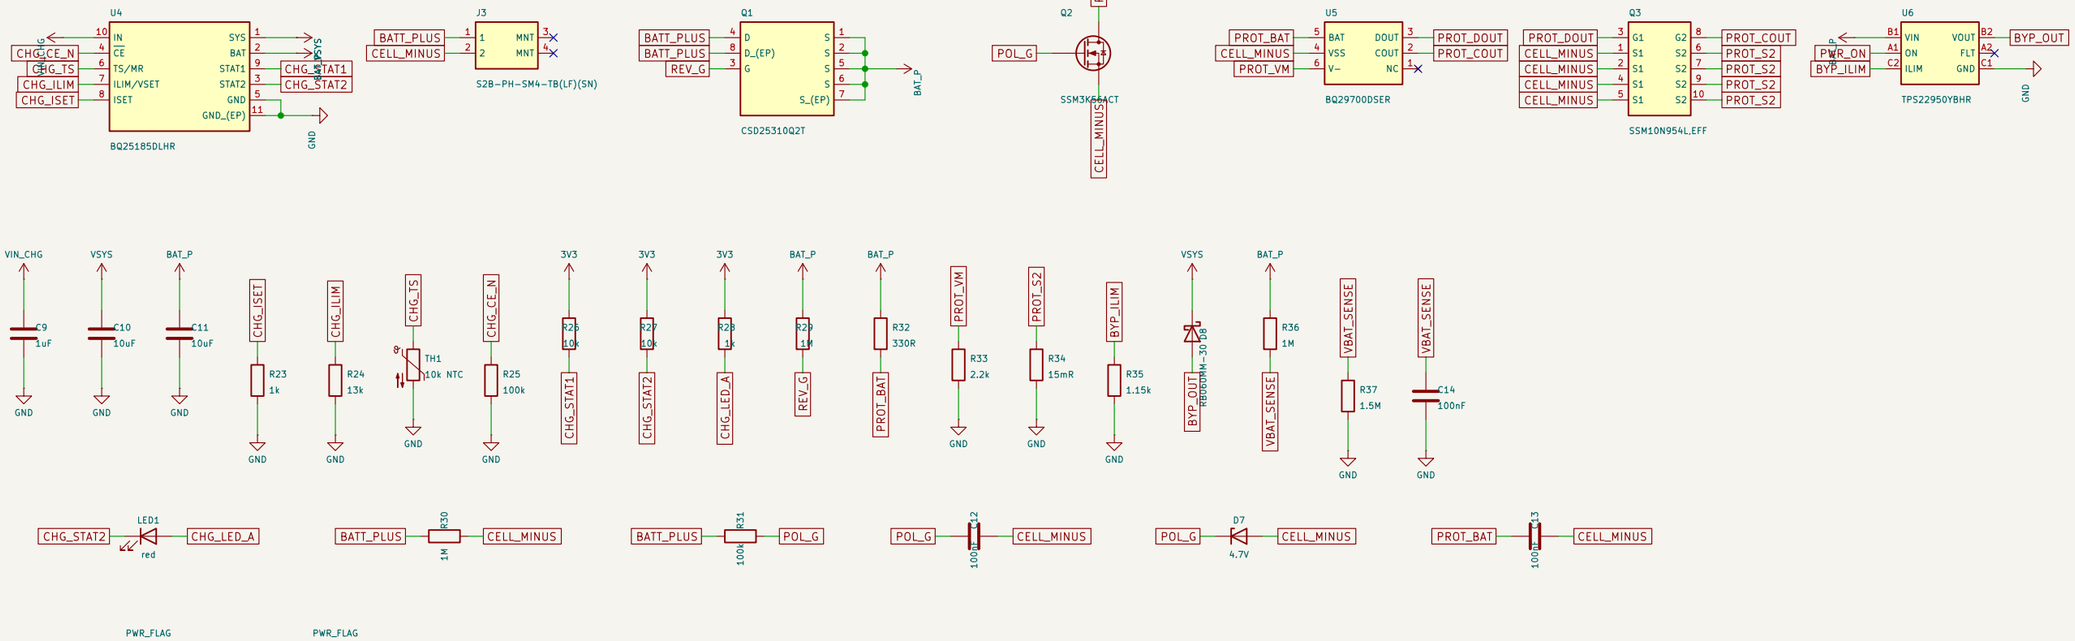

OffGrid Devices


Sheet: /Charger and battery: protection, reverse polarity, battery sense/
File: charger.kicad_sch


Title: Charger and battery: protection, reverse polarity, battery sense

Size: A3	Date:	**Rev: v1**
KiCad E.D.A. 10.0.7		Id: 3/9

System power: on/off switch, 3.3 V rail

The slide switch drives only enables (3.3 V buck, cell bypass); charging works with the board off.



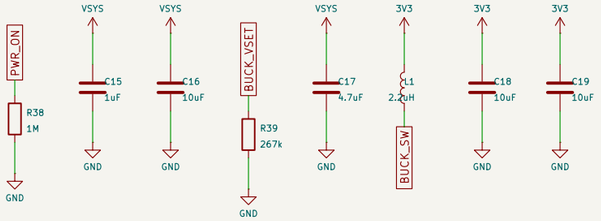

OffGrid Devices


Sheet: /System power: on/off switch, 3.3 V rail/
File: system.kicad_sch

Title: System power: on/off switch, 3.3 V rail

Size: A3	Date:	**Rev: v1**
KiCad E.D.A. 10.0.7		Id: 4/9

Processor and Bluetooth: nRF52840


nRF52840 in normal-voltage mode: VDD = VDDH = the 3.3 V rail, so its pins and the SX1262 share one logic level. REG1 DC/DC on (10 uH + 15 nH). Nordic reference circuit, aQFN73.

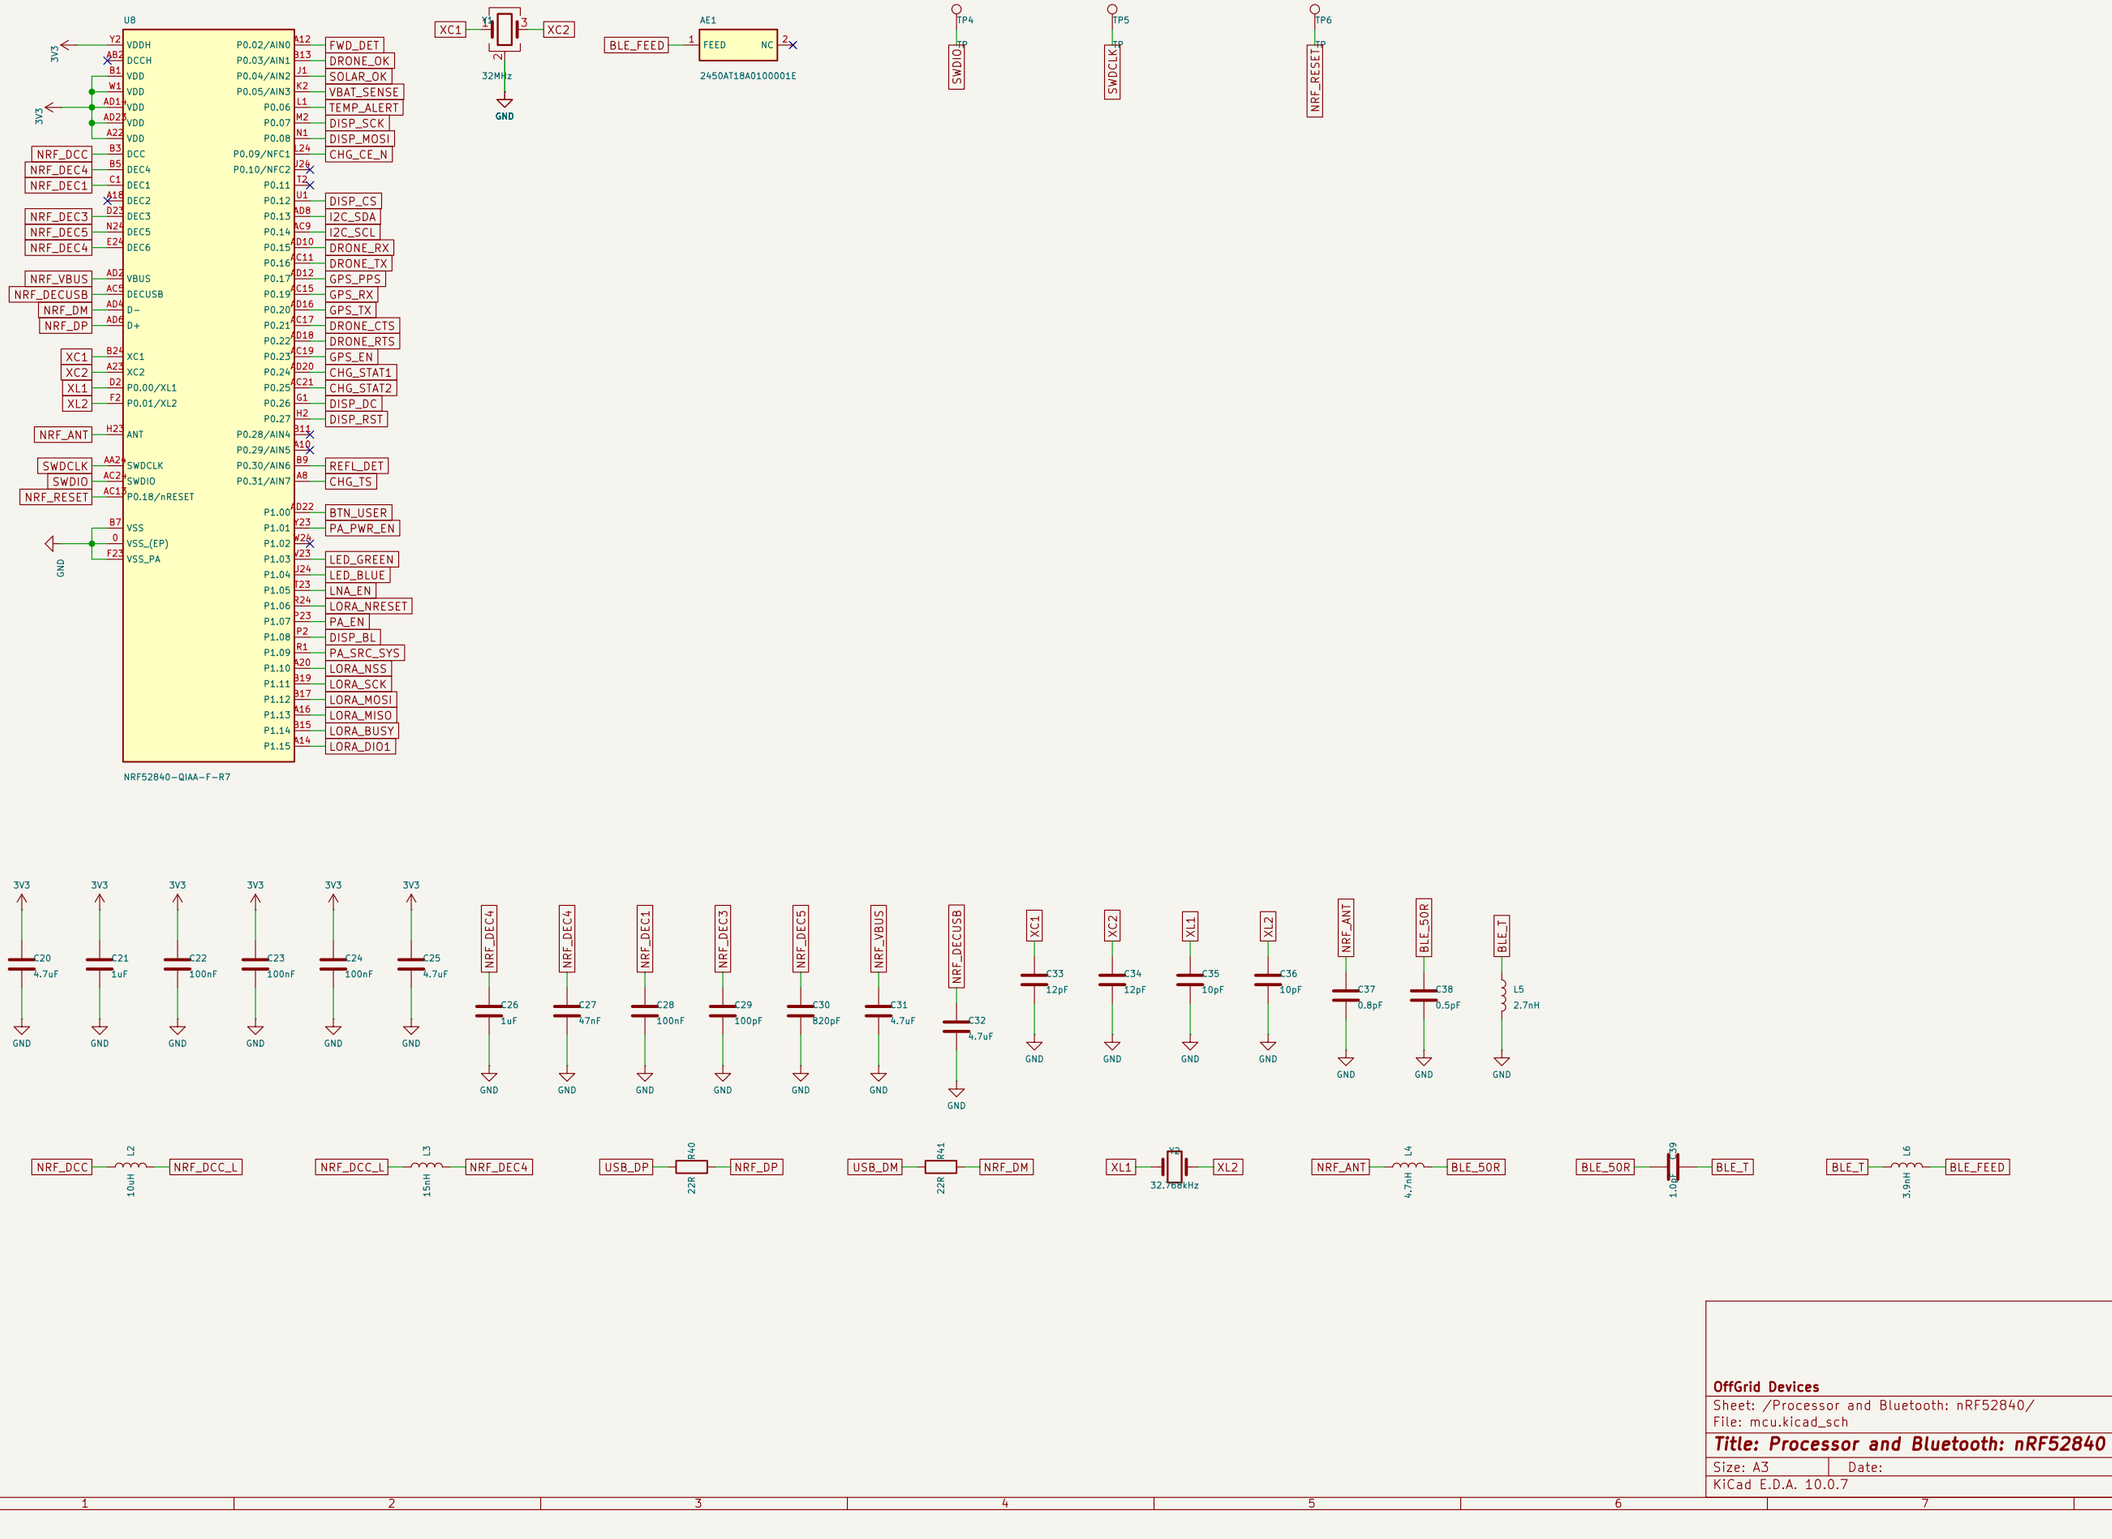



OffGrid Devices		
Sheet: /Processor and Bluetooth: nRF52840/		
File: mcu.kicad_sch		
Title: Processor and Bluetooth: nRF52840		
Size: A3	Date:	**Rev: v1**
KiCad E.D.A. 10.0.7		Id: 5/9

LoRa radio: SX1262, its clock, transmit match and receive balun

Semtech SX1262MB2CAS (915 MHz) reference values. TCXO on DIO3 (set 2.2 V in firmware), DIO2 drives the antenna switch.

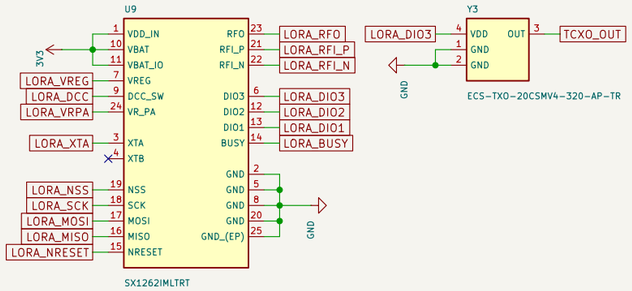

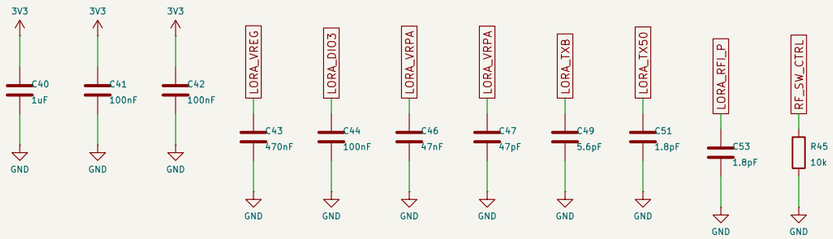

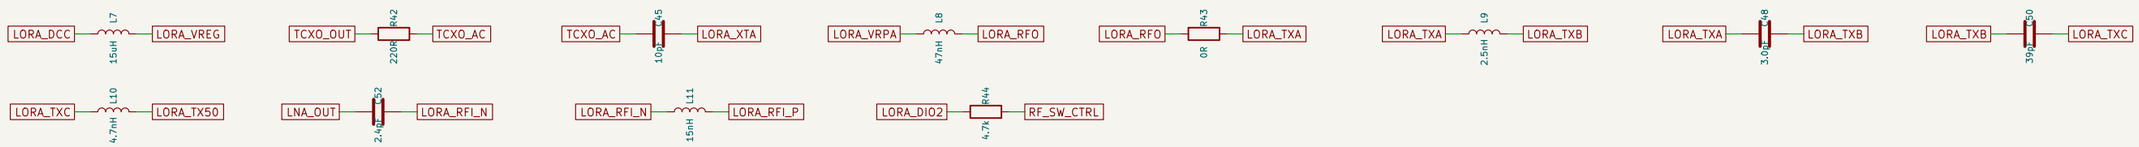

OffGrid Devices


Sheet: /LoRa radio: SX1262, its clock, transmit match and receive balun/
File: radio.kicad_sch


Title: LoRa radio: SX1262, its clock, transmit match and receive balun


Size: A3	Date:	**Rev: v1**
KiCad E.D.A. 10.0.7		Id: 6/9


RF front end: 15 dB pad, 3 W amplifier, filters, antenna switch, LNA


Drive: SX1262 +11 dBm -> 30 dBm (1 W), +17 dBm -> ~35 dBm (3 W). The 15.9 dB pad keeps the amplifier input below its +13 dBm limit even at the SX1262 maximum (+22 dBm -> +6 dBm).

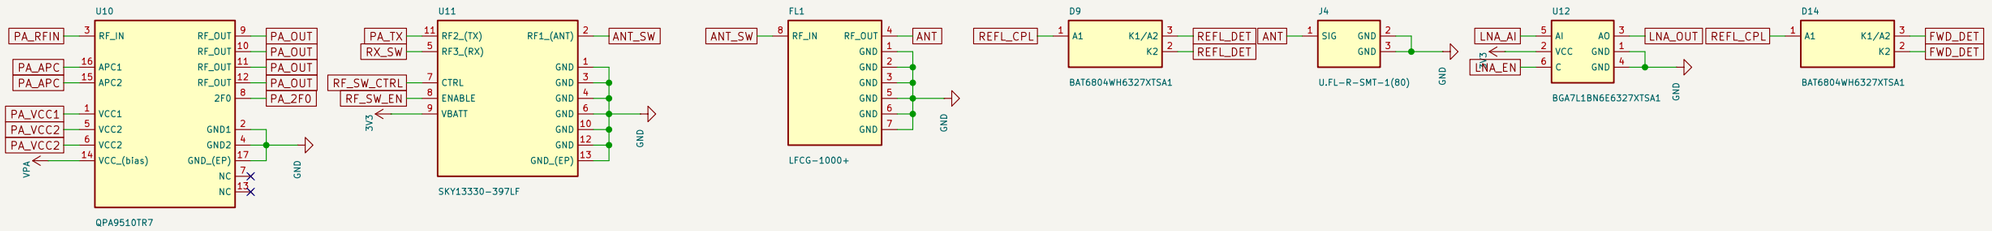

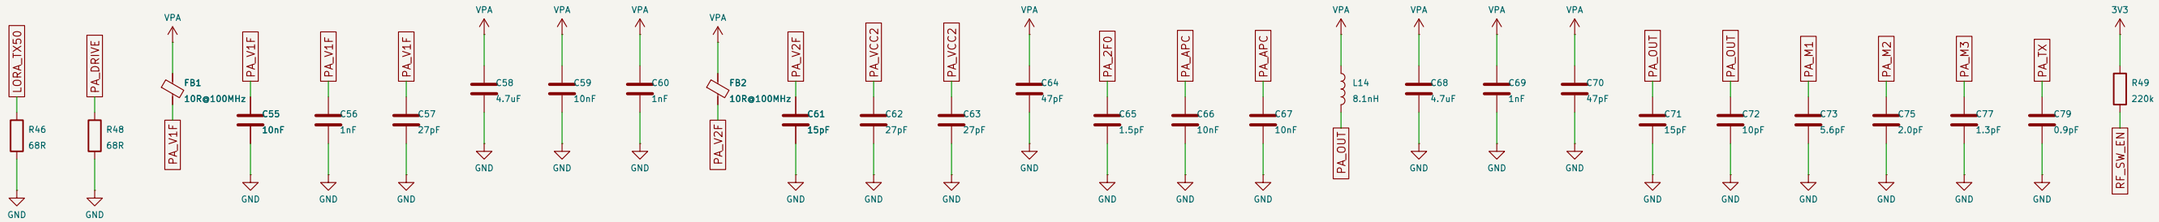

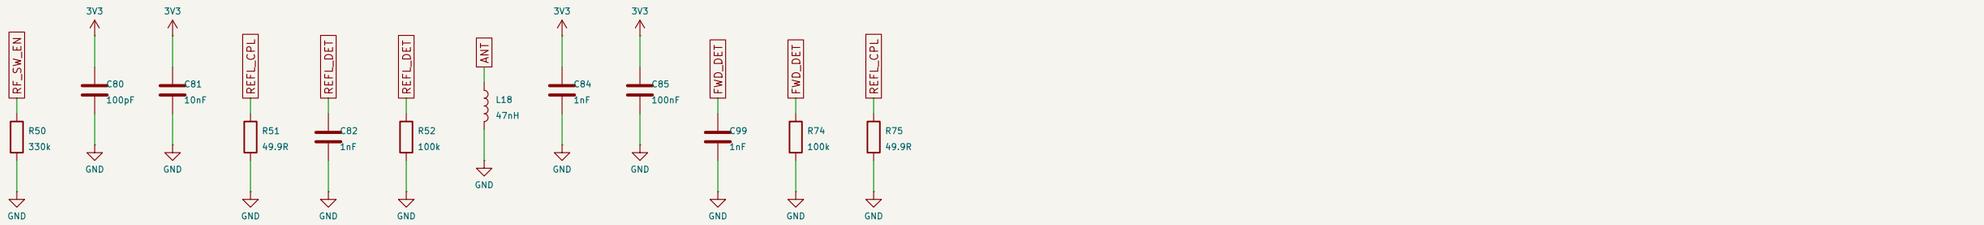

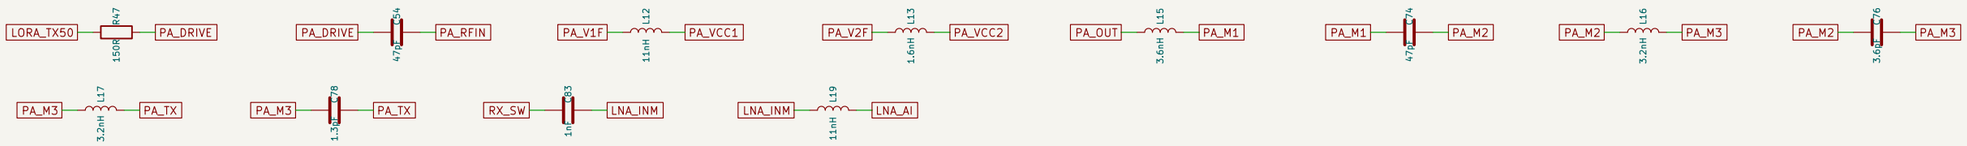



OffGrid Devices


Sheet: /RF front end: 15 dB pad, 3 W amplifier, filters, antenna switch, LNA/
File: frontend.kicad_sch


Title: RF front end: 15 dB pad, 3 W amplifier, filters, antenna switch, LNA

Size: A3	Date:	**Rev: v1**
KiCad E.D.A. 10.0.7		Id: 7/9

Amplifier power: battery–first supply, buck–boost, control voltage, temperature

Amplifier runs from the battery through a power mux (battery first down to 2.6 V; firmware selects
charger SYS when no cell is fitted), then a TPS63810 buck–boost (I2C 0x75): 2.7 V for 1 W, 4.0 V for 3 W.

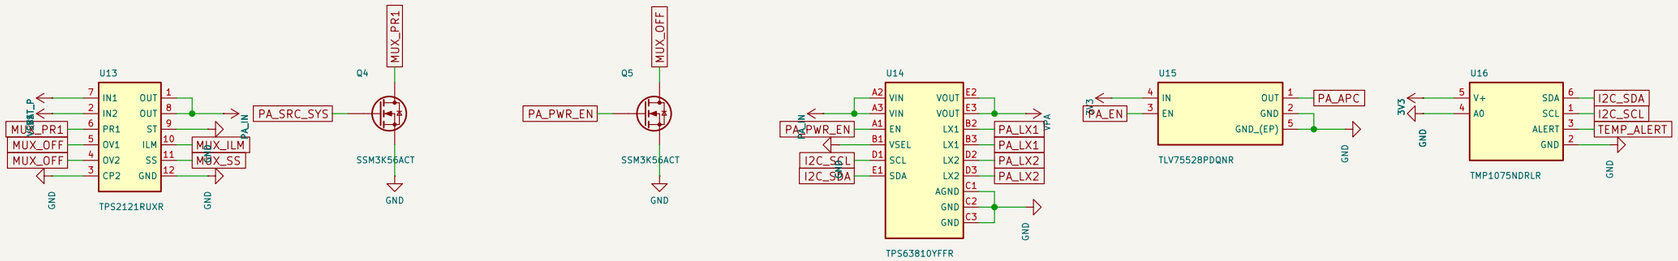

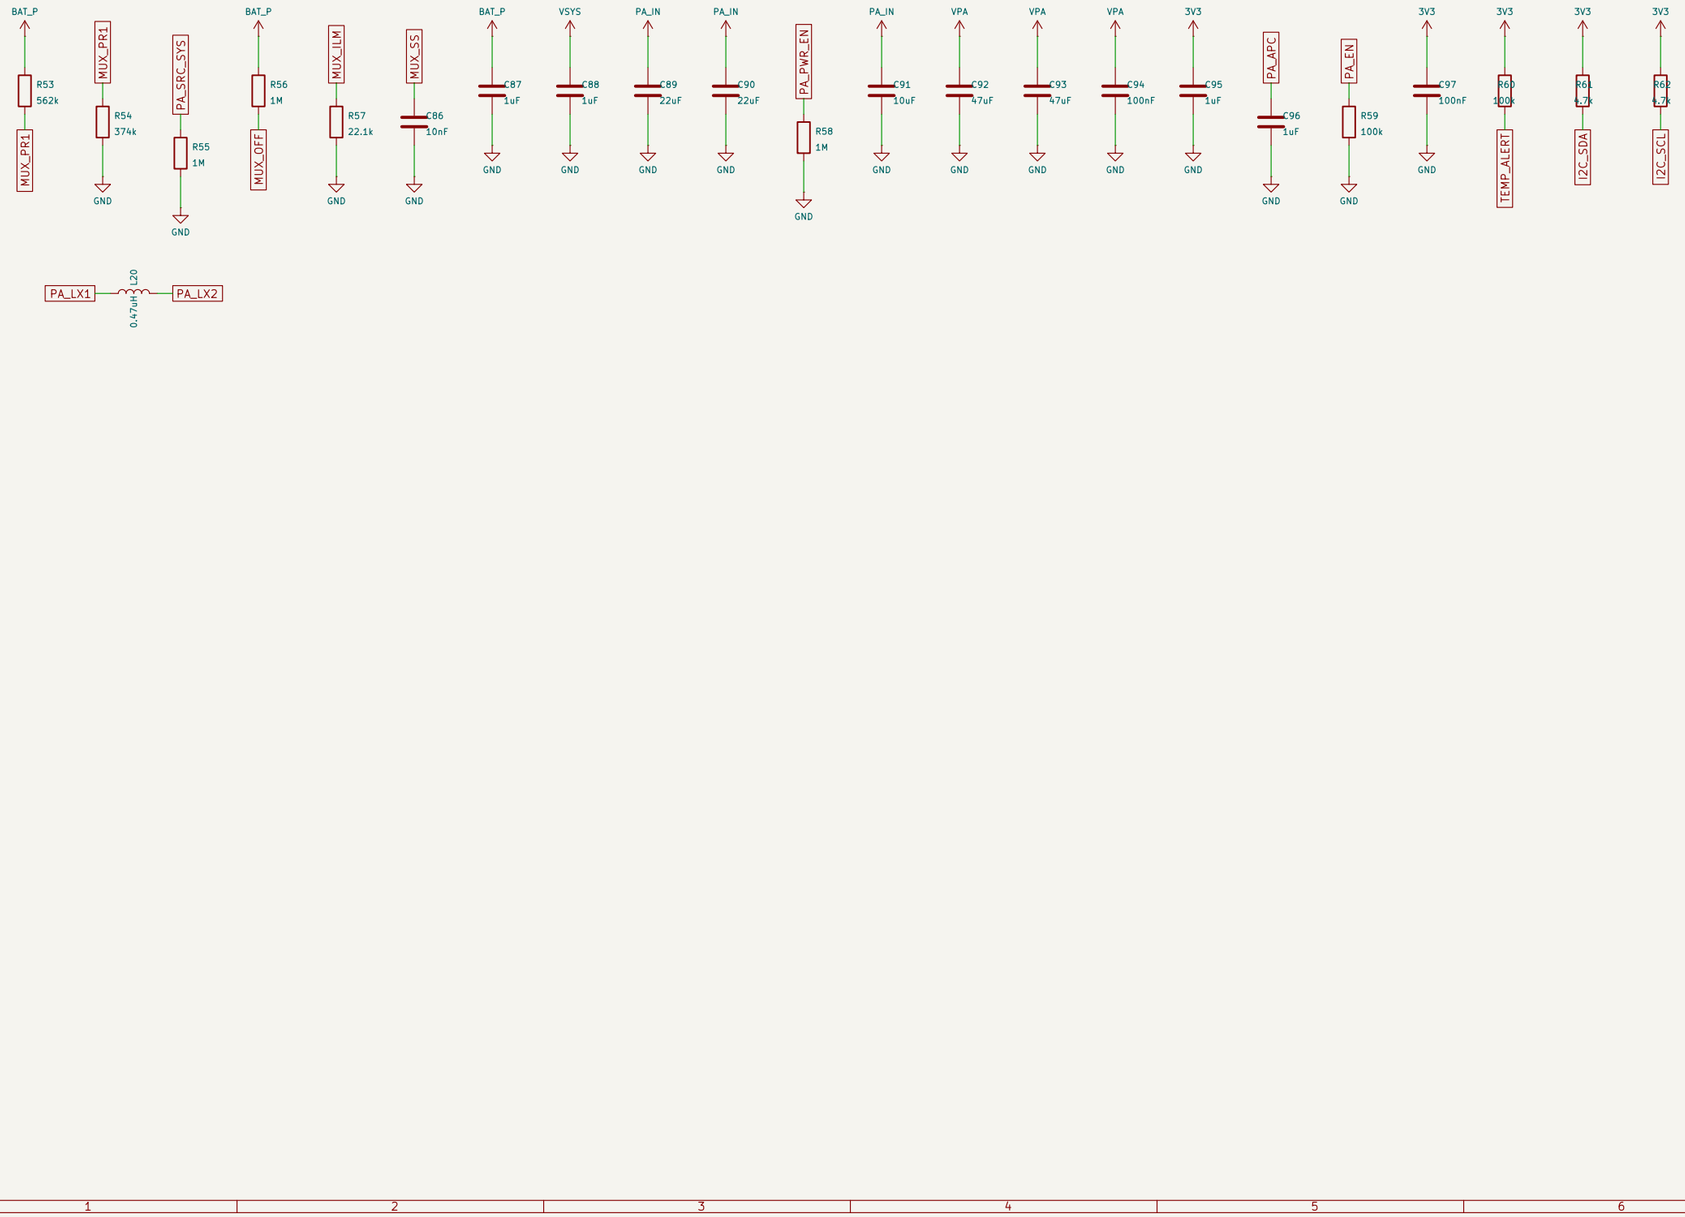

OffGrid Devices


Sheet: /Amplifier power: battery–first supply, buck–boost, control voltage, temperature/
File: pa_power.kicad_sch


Title: Amplifier power: battery–first supply, buck–boost, control voltage, tem


Size: A3	Date:	**Rev: v1**
KiCad E.D.A. 10.0.7		Id: 8/9

Ports: drone (JST-GH), GPS add-on (JST-SH), expansion header, buttons, LEDs

Drone port wired as Pixhawk TELEM (pins from the autopilot side): 1 5V, 2 TX, 3 RX, 4 CTS, 5 RTS,
6 GND. Series resistors and ESD on every external signal.

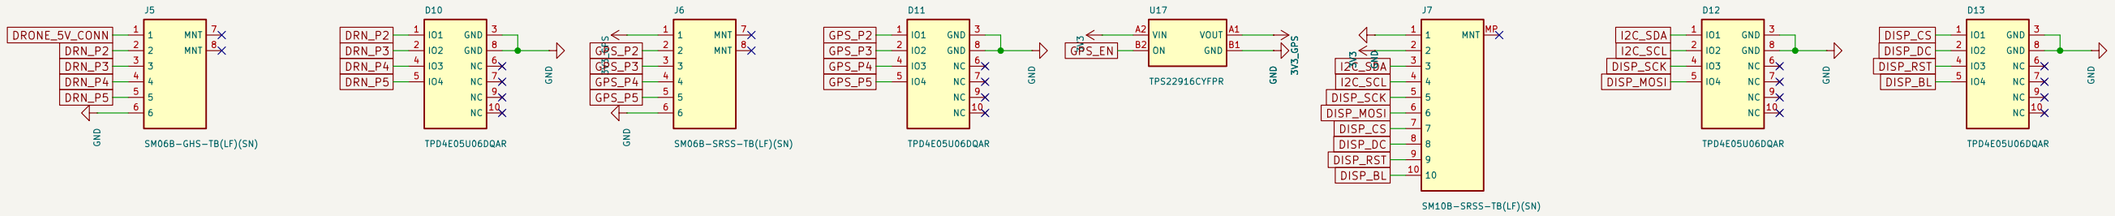



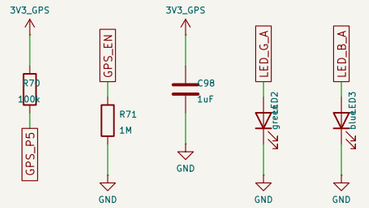



OffGrid Devices		
Sheet: /Ports: drone (JST-GH), GPS add-on (JST-SH), expansion header, buttons, LEDs/		
File: ports.kicad_sch		
Title: Ports: drone (JST-GH), GPS add-on (JST-SH), expansion header, butto		
Size: A3	Date:	**Rev: v1**
KiCad E.D.A. 10.0.7		Id: 9/9