University of Stuttgart
Institute of electrical and optical communications

Advanced optical fiber communications Wintersemester 2025/26 Exercise 1

M.Sc. Julian Schneck



Organizational matter:

University of Stuttgart
Germany

- M.Sc. Julian Schneck
- E-Mail: Julian.Schneck@int.uni-stuttgart.de
- Room: 2.460, ETI-II, Pfaffenwaldring 47

- Website: www.int.uni-stuttgart.de/en

Organizational matter:




University of Stuttgart
Germany

- Diving deeper into the topics of the lecture by solving problems
- Where necessary, additional theory will be provided
- Problems are usually uploaded about one week before the next exercise

Basics:

University of Stuttgart
Germany


Electromagnetic spectrum:

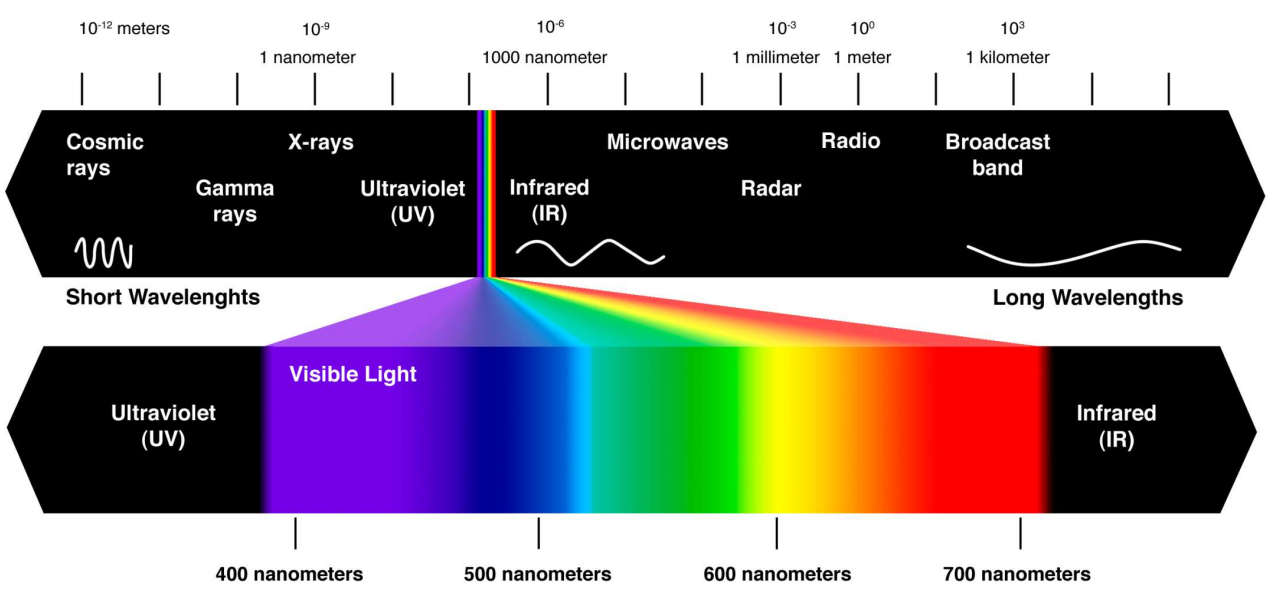

Basics:

University of Stuttgart
Germany

Fiber loss:

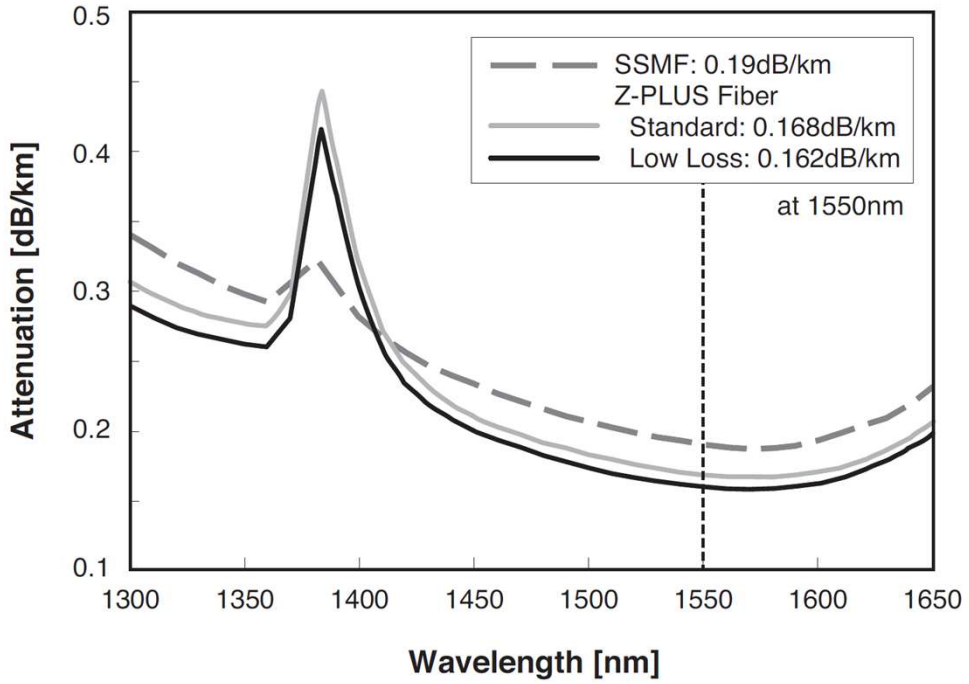

Yamamoto et al, Low-Loss and Low-Nonlinearity Pure-Silica-Core Fiber for Large Capacity Transmission, SEI Technical review, 2013

Problem 1:

University of Stuttgart
Germany

A plane electromagnetic wave oscillates at an angular frequency of $1.216 \cdot 10^{15}$ rad/s.
Find its wavelength in free space and in the following media:
Water ($n_{H2O} = 1.33$), glass (SiO_2, $n_{SiO2} = 1.44$) and Gallium Arsenide (GaAs, $n_{GaAs} = 3.6$).

Problem 2:

University of Stuttgart
Germany

a) Show that $\underline{\vec{E}}(z,t)=\begin{pmatrix} E_x e^{j(\omega t-\underline{k}z)} \\ 0 \\ 0 \end{pmatrix}$ is a solution of the wave equation $\nabla^2 \underline{\vec{E}} + \mu_0 \varepsilon_0 \underline{\varepsilon}_r \omega^2 \underline{\vec{E}} = 0$
and determine the expression for $\underline{k}$.

b) Use $\underline{k} = \beta - j\alpha$ and determine the real part of $\underline{E}(z,t)$.
Sketch $\mathrm{Re}\{\underline{E}(z,t)\}$ for $\omega t = 0$ and $\omega t = \pi/2$.


c) Use the characteristic impedance $\underline{Z}$ to calculate the magnetic field. What does a complex $\underline{Z}$ mean for the phase relation between $\underline{\vec{E}}(z,t)$ and $\underline{\vec{H}}(z,t)$?

Problem 3:

Consider the electrical field of a plane wave with two components:

$$\vec{E}(z,t) = \begin{pmatrix} E_x \cos(\omega t - kz) \\ E_y \cos(\omega t - kz + \varphi) \\ 0 \end{pmatrix}$$

Sketch the vector in the xy-plane at $z = 0$ for $\varphi = 0$ and $\varphi = \pi/2$ for different times.
Show that for $\varphi = \pi/2$ and $E_x = E_y$ the vector rotates on a circle.



University of Stuttgart
Institute of electrical and optical communications

Thank you!



M.Sc. Julian Schneck

e-mail Julian.Schneck@int.uni-stuttgart.de
phone +49 (0) 711 685 69187
www.int.uni-stuttgart.de/en

University of Stuttgart
Institute of electrical and optical communications

