# *1. Description*

1.1. Project

Project Name	F446_arm_controller
Board Name	F446_arm_controller
Generated with:	STM32CubeMX 4.23.0
Date	01/25/2018

1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F446
MCU name	STM32F446RETx
MCU Package	LQFP64
MCU Pin number	64

2. Pinout Configuration
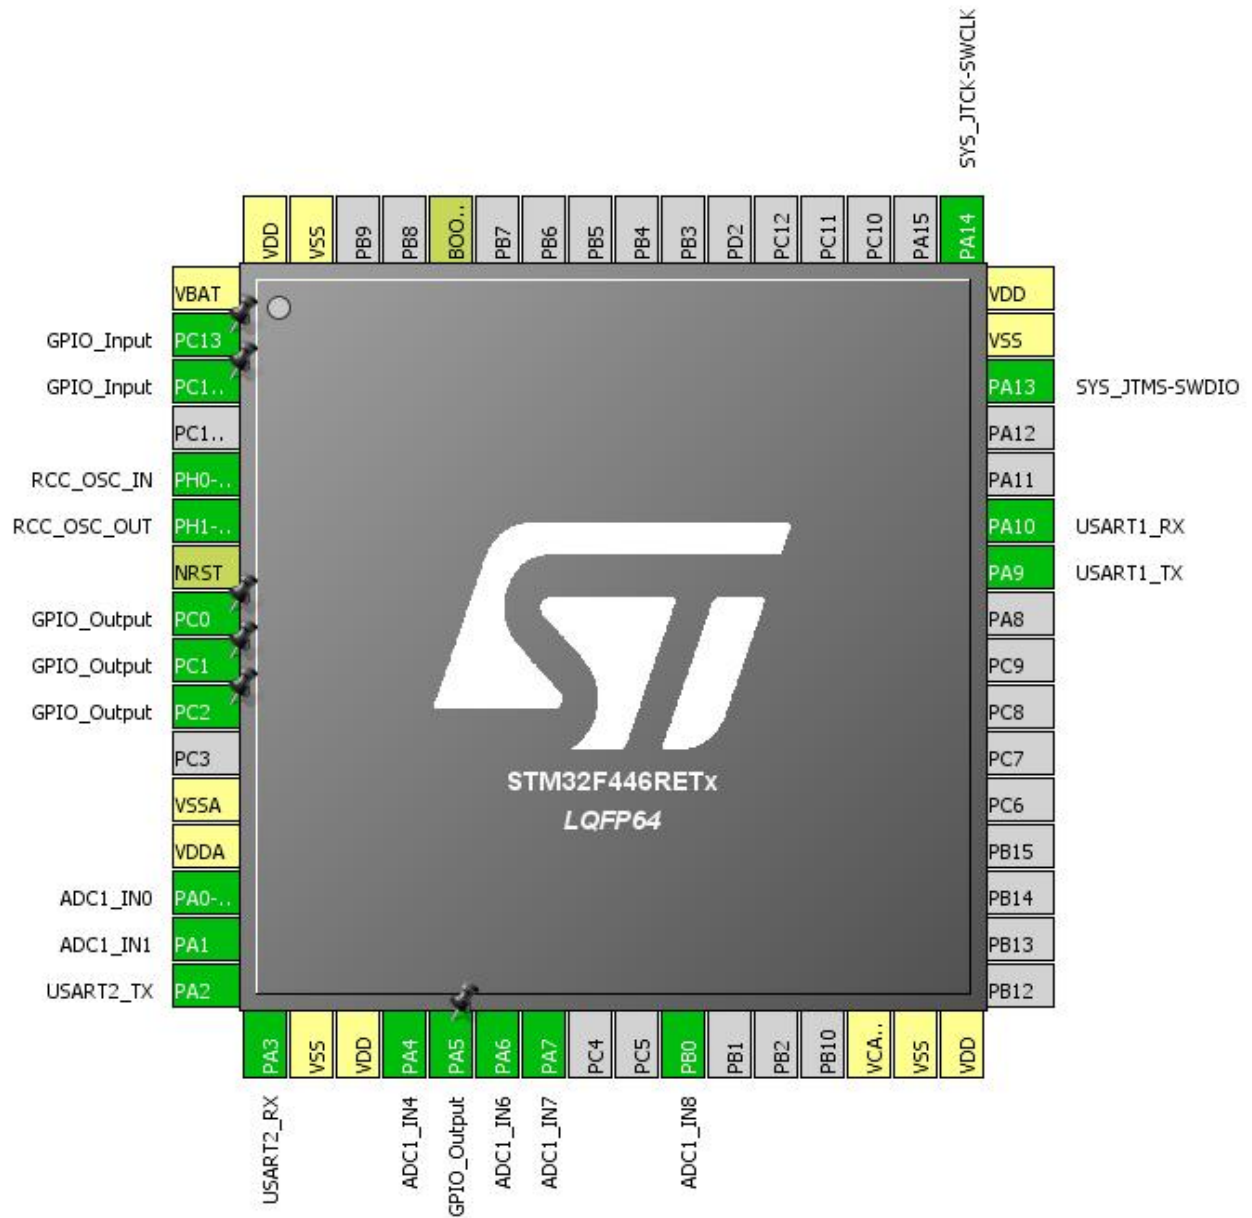
3. Pins Configuration

Pin Number LQFP64	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13 *	I/O	GPIO_Input	
3	PC14-OSC32_IN *	I/O	GPIO_Input	
5	PH0-OSC_IN	I/O	RCC_OSC_IN	
6	PH1-OSC_OUT	I/O	RCC_OSC_OUT	
7	NRST	Reset		
8	PC0 *	I/O	GPIO_Output	
9	PC1 *	I/O	GPIO_Output	
10	PC2 *	I/O	GPIO_Output	
12	VSSA	Power		
13	VDDA	Power		
14	PA0-WKUP	I/O	ADC1_IN0	
15	PA1	I/O	ADC1_IN1	
16	PA2	I/O	USART2_TX	
17	PA3	I/O	USART2_RX	
18	VSS	Power		
19	VDD	Power		
20	PA4	I/O	ADC1_IN4	
21	PA5 *	I/O	GPIO_Output	
22	PA6	I/O	ADC1_IN6	
23	PA7	I/O	ADC1_IN7	
26	PB0	I/O	ADC1_IN8	
30	VCAP_1	Power		
31	VSS	Power		
32	VDD	Power		
42	PA9	I/O	USART1_TX	
43	PA10	I/O	USART1_RX	
46	PA13	I/O	SYS_JTMS-SWDIO	
47	VSS	Power		
48	VDD	Power		
49	PA14	I/O	SYS_JTCK-SWCLK	
60	BOOT0	Boot		
63	VSS	Power		
64	VDD	Power		

 * The pin is affected with an I/O function

4. Clock Tree Configuration
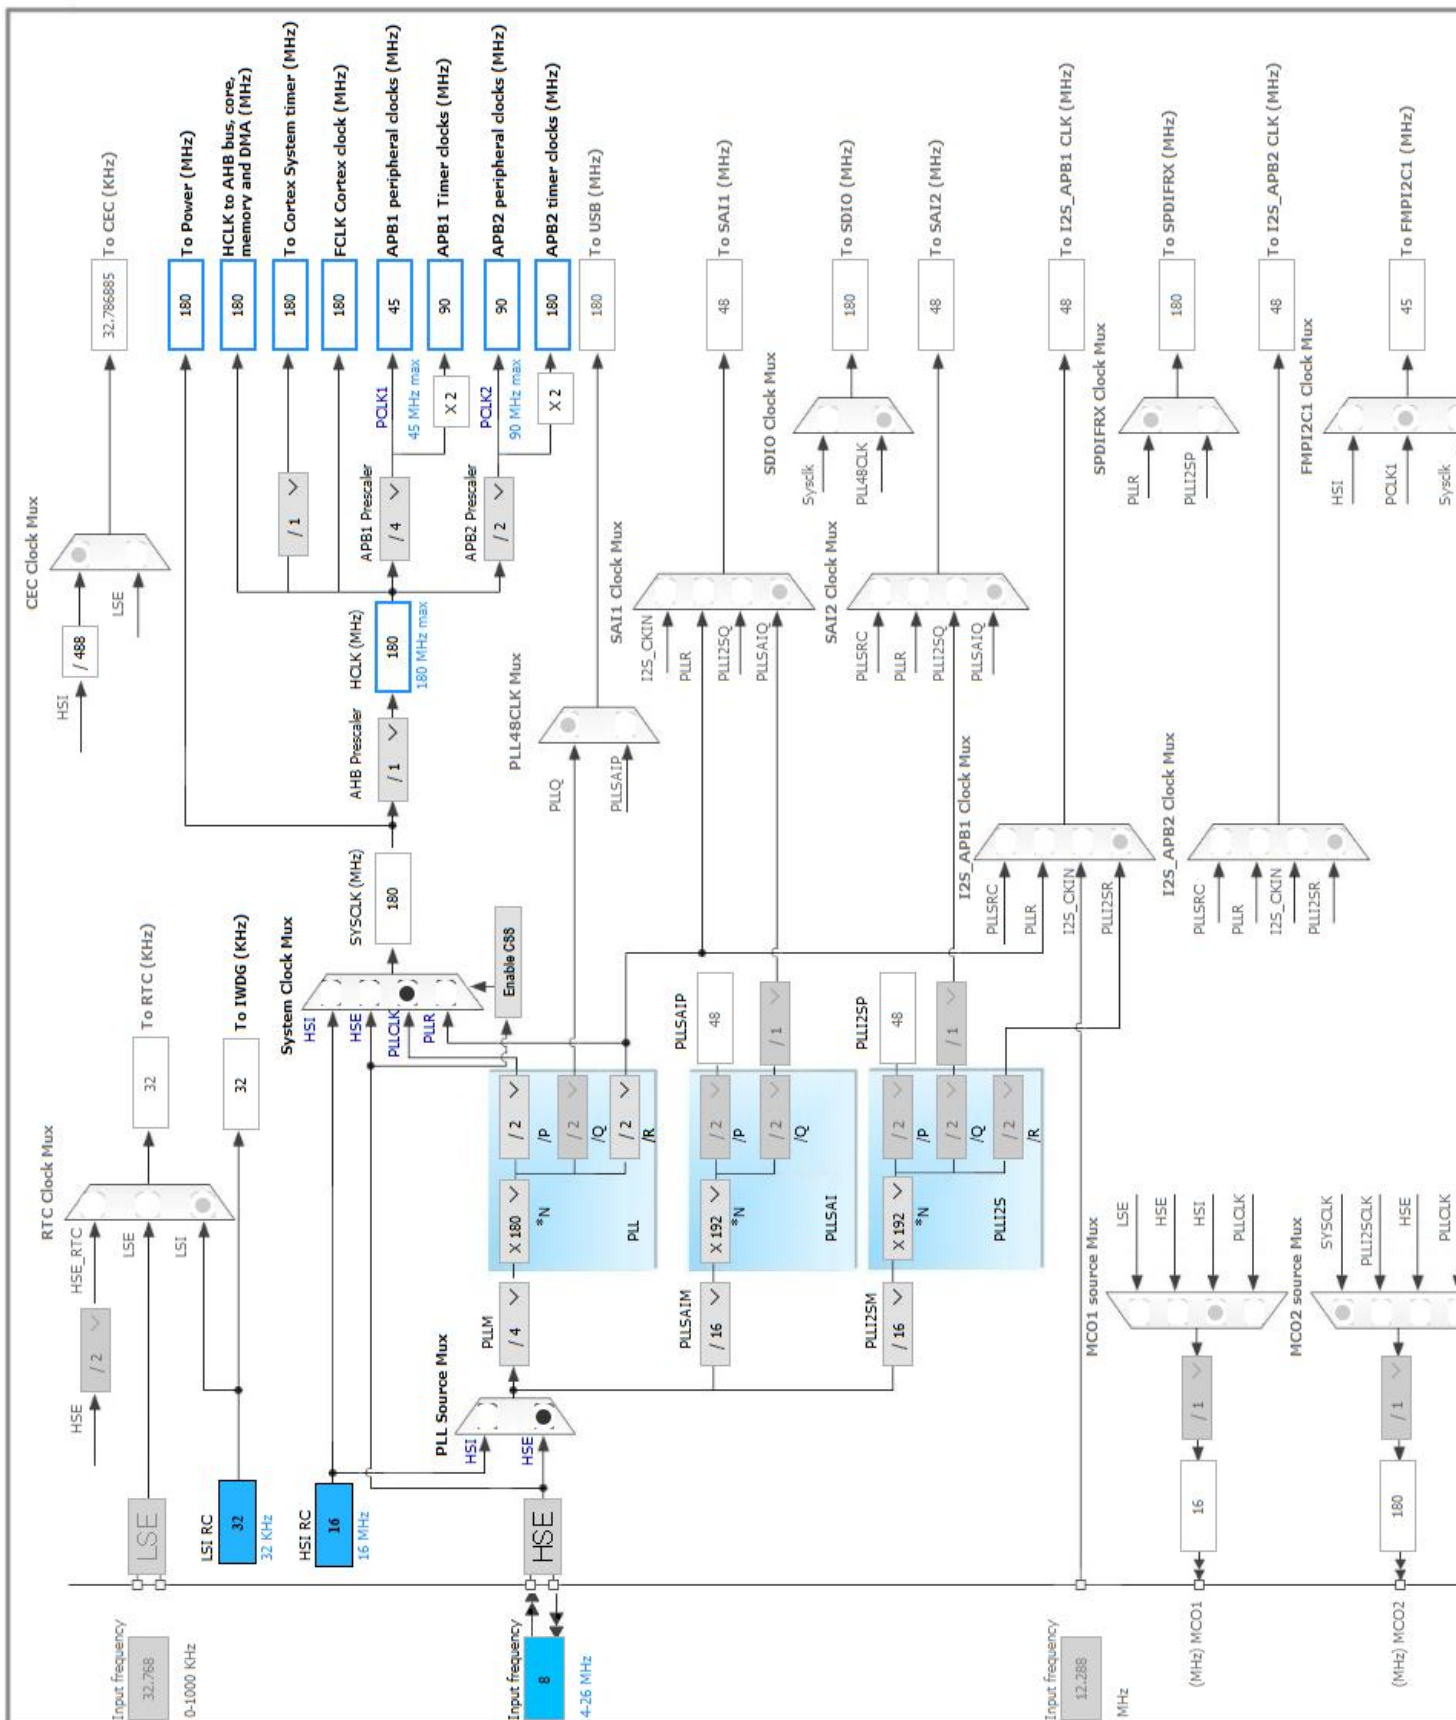
5. IPs and Middleware Configuration

5.1. ADC1

mode: IN0

mode: IN1

mode: IN4

mode: IN6

mode: IN7

mode: IN8

5.1.1. Parameter Settings:

ADCs_Common_Settings:

Mode	Independent mode

ADC_Settings:

Clock Prescaler	PCLK2 divided by 4
Resolution	12 bits (15 ADC Clock cycles)
Data Alignment	Right alignment
Scan Conversion Mode	**Enabled ***
Continuous Conversion Mode	**Enabled ***
Discontinuous Conversion Mode	Disabled
DMA Continuous Requests	**Enabled ***
End Of Conversion Selection	EOC flag at the end of single channel conversion

ADC_Regular_ConversionMode:

Number Of Conversion	**6 ***
External Trigger Conversion Source	Regular Conversion launched by software
External Trigger Conversion Edge	None
Rank	1
Channel	Channel 0
Sampling Time	**56 Cycles ***
Rank	**2 ***
Channel	**Channel 1 ***
Sampling Time	**56 Cycles ***
Rank	**3 ***
Channel	**Channel 4 ***
Sampling Time	**56 Cycles ***

Rank	**4 ***
Channel	**Channel 6 ***
Sampling Time	**56 Cycles ***
Rank	**5 ***
Channel	**Channel 7 ***
Sampling Time	**56 Cycles ***
Rank	**6 ***
Channel	**Channel 8 ***
Sampling Time	**56 Cycles ***

ADC_Injected_ConversionMode:

Number Of Conversions	0

WatchDog:

Enable Analog WatchDog Mode	false

5.2. IWDG

mode: Activated

5.2.1. Parameter Settings:

Clocking:

IWDG counter clock prescaler	**16 ***
IWDG down-counter reload value	4095

5.3. RCC

High Speed Clock (HSE): Crystal/Ceramic Resonator

5.3.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	5 WS (6 CPU cycle)

RCC Parameters:

HSI Calibration Value	16
TIM Prescaler Selection	Disabled
HSE Startup Timout Value (ms)	100
LSE Startup Timout Value (ms)	5000

Power Parameters:

Power Regulatror Voltage Scale	Power Regulator Voltage Scale 1
Power Over Drive	Enabled

5.4. SYS

Debug: Serial Wire

Timebase Source: SysTick

5.5. USART1

Mode: Asynchronous

5.5.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples

5.6. USART2

Mode: Asynchronous

5.6.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)
Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction   Receive and Transmit
Over Sampling   16 Samples

* User modified value

6. System Configuration

6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PA0-WKUP	ADC1_IN0	Analog mode	No pull-up and no pull-down	n/a	
	PA1	ADC1_IN1	Analog mode	No pull-up and no pull-down	n/a	
	PA4	ADC1_IN4	Analog mode	No pull-up and no pull-down	n/a	
	PA6	ADC1_IN6	Analog mode	No pull-up and no pull-down	n/a	
	PA7	ADC1_IN7	Analog mode	No pull-up and no pull-down	n/a	
	PB0	ADC1_IN8	Analog mode	No pull-up and no pull-down	n/a	
RCC	PH0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
USART1	PA9	USART1_TX	Alternate Function Push Pull	Pull-up	**Very High** *	
	PA10	USART1_RX	Alternate Function Push Pull	Pull-up	**Very High** *	
USART2	PA2	USART2_TX	Alternate Function Push Pull	Pull-up	**Very High** *	
	PA3	USART2_RX	Alternate Function Push Pull	Pull-up	**Very High** *	
GPIO	PC13	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	
	PC14-OSC32_IN	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	
	PC0	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PC1	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PC2	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	

6.2. DMA configuration

DMA request	Stream	Direction	Priority
ADC1	DMA2_Stream0	Peripheral To Memory	**Medium ***
USART1_TX	DMA2_Stream7	Memory To Peripheral	Low

ADC1: DMA2_Stream0 DMA request Settings:

Mode:	**Circular ***
Use fifo:	Disable
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	Half Word
Memory Data Width:	Half Word

USART1_TX: DMA2_Stream7 DMA request Settings:

Mode:	**Circular ***
Use fifo:	Disable
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	Byte
Memory Data Width:	Byte

6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
DMA2 stream0 global interrupt	true	1	0
DMA2 stream7 global interrupt	true	2	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
ADC1, ADC2 and ADC3 interrupts	unused		
USART1 global interrupt	unused		
USART2 global interrupt	unused		
FPU global interrupt	unused		

* User modified value

7. Power Consumption Calculator report

7.1. Microcontroller Selection

Series	STM32F4
Line	STM32F446
MCU	STM32F446RETx
Datasheet	027107_Rev6

7.2. Parameter Selection

Temperature	25
Vdd	null

8. Software Project

8.1. Project Settings

Name	Value
Project Name	F446_arm_controller
Project Folder	C:\Users\ryouma\OneDrive\\18\\F446_arm_controller
Toolchain / IDE	TrueSTUDIO
Firmware Package Name and Version	STM32Cube FW_F4 V1.18.0

8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	Yes
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No