


FIELD CONNECTOR

현장 커넥터

J1 JST GH 8P -> W-2 -> M12 8P
EE364 pinout, pin n = pin n




Pins 1, 7: not connected
GH mounting pads (MP): PCB only

INPUT SURGE / REVERSE-POLARITY PROTECTION

입력 서지·역극성 보호


TVS bidirectional: -30 V miswiring must not conduct

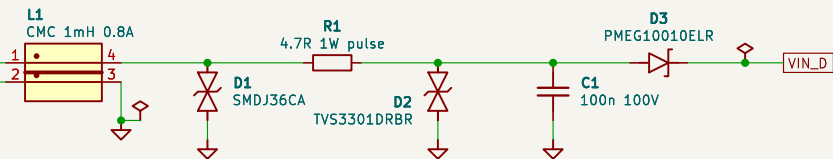

SMDJ (1st) -> R1 -> TVS3301 (2nd) -> D3 100 V Schottky -> eFuse (sheet Power)

CIRCUIT GND <--> CHASSIS (floating)

회로 GND-외함 분리



PCB-housing creepage >= 2 mm

GDT conducts only on line-to-ground surge

주요 부품 — 역할 · 특징 · 사양

부품번호	부품	역할	특징 · 사양
J1	SM08B-GHS-TB	현장 커넥터 연결	JST GH 1.25 mm 8P 옆 삽입, 하네스 W-2 → M12 8P, 핀 n = M12 핀 n
L1	CMC 1mH 0.8A	전원선 공통모드 노이즈 차단	Bourns SRF0905-102Y (LCSC, 744222 동등), 2 × 1 mH, 0.8 A, 9.2 × 6 × 5.3 mm —전도 방출·내성 대책
D1	SMDJ36CA	입력 서지 1단 흡수	TVS 양방향 3000 W, 36 V — -30 V 오결선에 도통 안 함
R1	4.7R 1W pulse	1단·2단 서지 분담	2512 1 W 펄스 내성 (CRCW-HP, JLC 글로벌 소싱)
D2	TVS3301DRBR	입력 서지 2단 클램프	TI 평탄 클램프 ±33 V, 최대 42.5 V @ 27 A, DC 입력 33 V 초과 금지 (v0.9, 이전 SMBJ33CA)
D3	PMEG10010ELR	음(-) 서지·역극성 차단	Nexperia 100 V 1 A 쇼트키 (저누설). D2가 -42.5 V로 잠는 동안 출력 쪽 +28 V → 역전압 약 71 V를 D3가 받음 → eFuse IN-OUT 역전압 없음 (외부 검수 H01). 손실 약 0.45 V × 0.1 A
GDT1	2035-25-SM	회로 GND-외함 서지 방전	Bourns 2전극 SMD GDT 250 V (LCSC), Ø5 × 4.4 mm — 선-대지 서지 때만 도통
C3, R2	4.7n 2kV / 1M HV	GND-외함 고주파 결합	4.7 nF 2 kV X7R 1812 + 1 MΩ 서지용 칩 저항 1206 (500 V, GDT 방전 전 임펄스, 물딩 안)
J5	CHASSIS wire	PCB-바디 접지 선	AWG 28 선 약 25 mm → M2 링 단자 → PCB 홀더 축 나사(금속 바디 텀). 조립 시뮬레이션 결과 스프링 점검 대체

* 표시 값은 데이터시트로 확인


Pinouts checked vs manufacturer datasheets 2026-09-30 (STM32: KiCad lib)
Design notes: docs/hw/circuit-design.md
Project No. HMT500(260313A) — HMT500(260313) oil moisture transmitter






DOTECH Co., Ltd.

Sheet: /1. Connector & input protection/
File: HMT500(260313A)_connector.kicad_sch

Title: HMT500(260313A) Connector & input protection

Size: A3	Date: 2026-09-30	Rev: 0.9
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 2/8

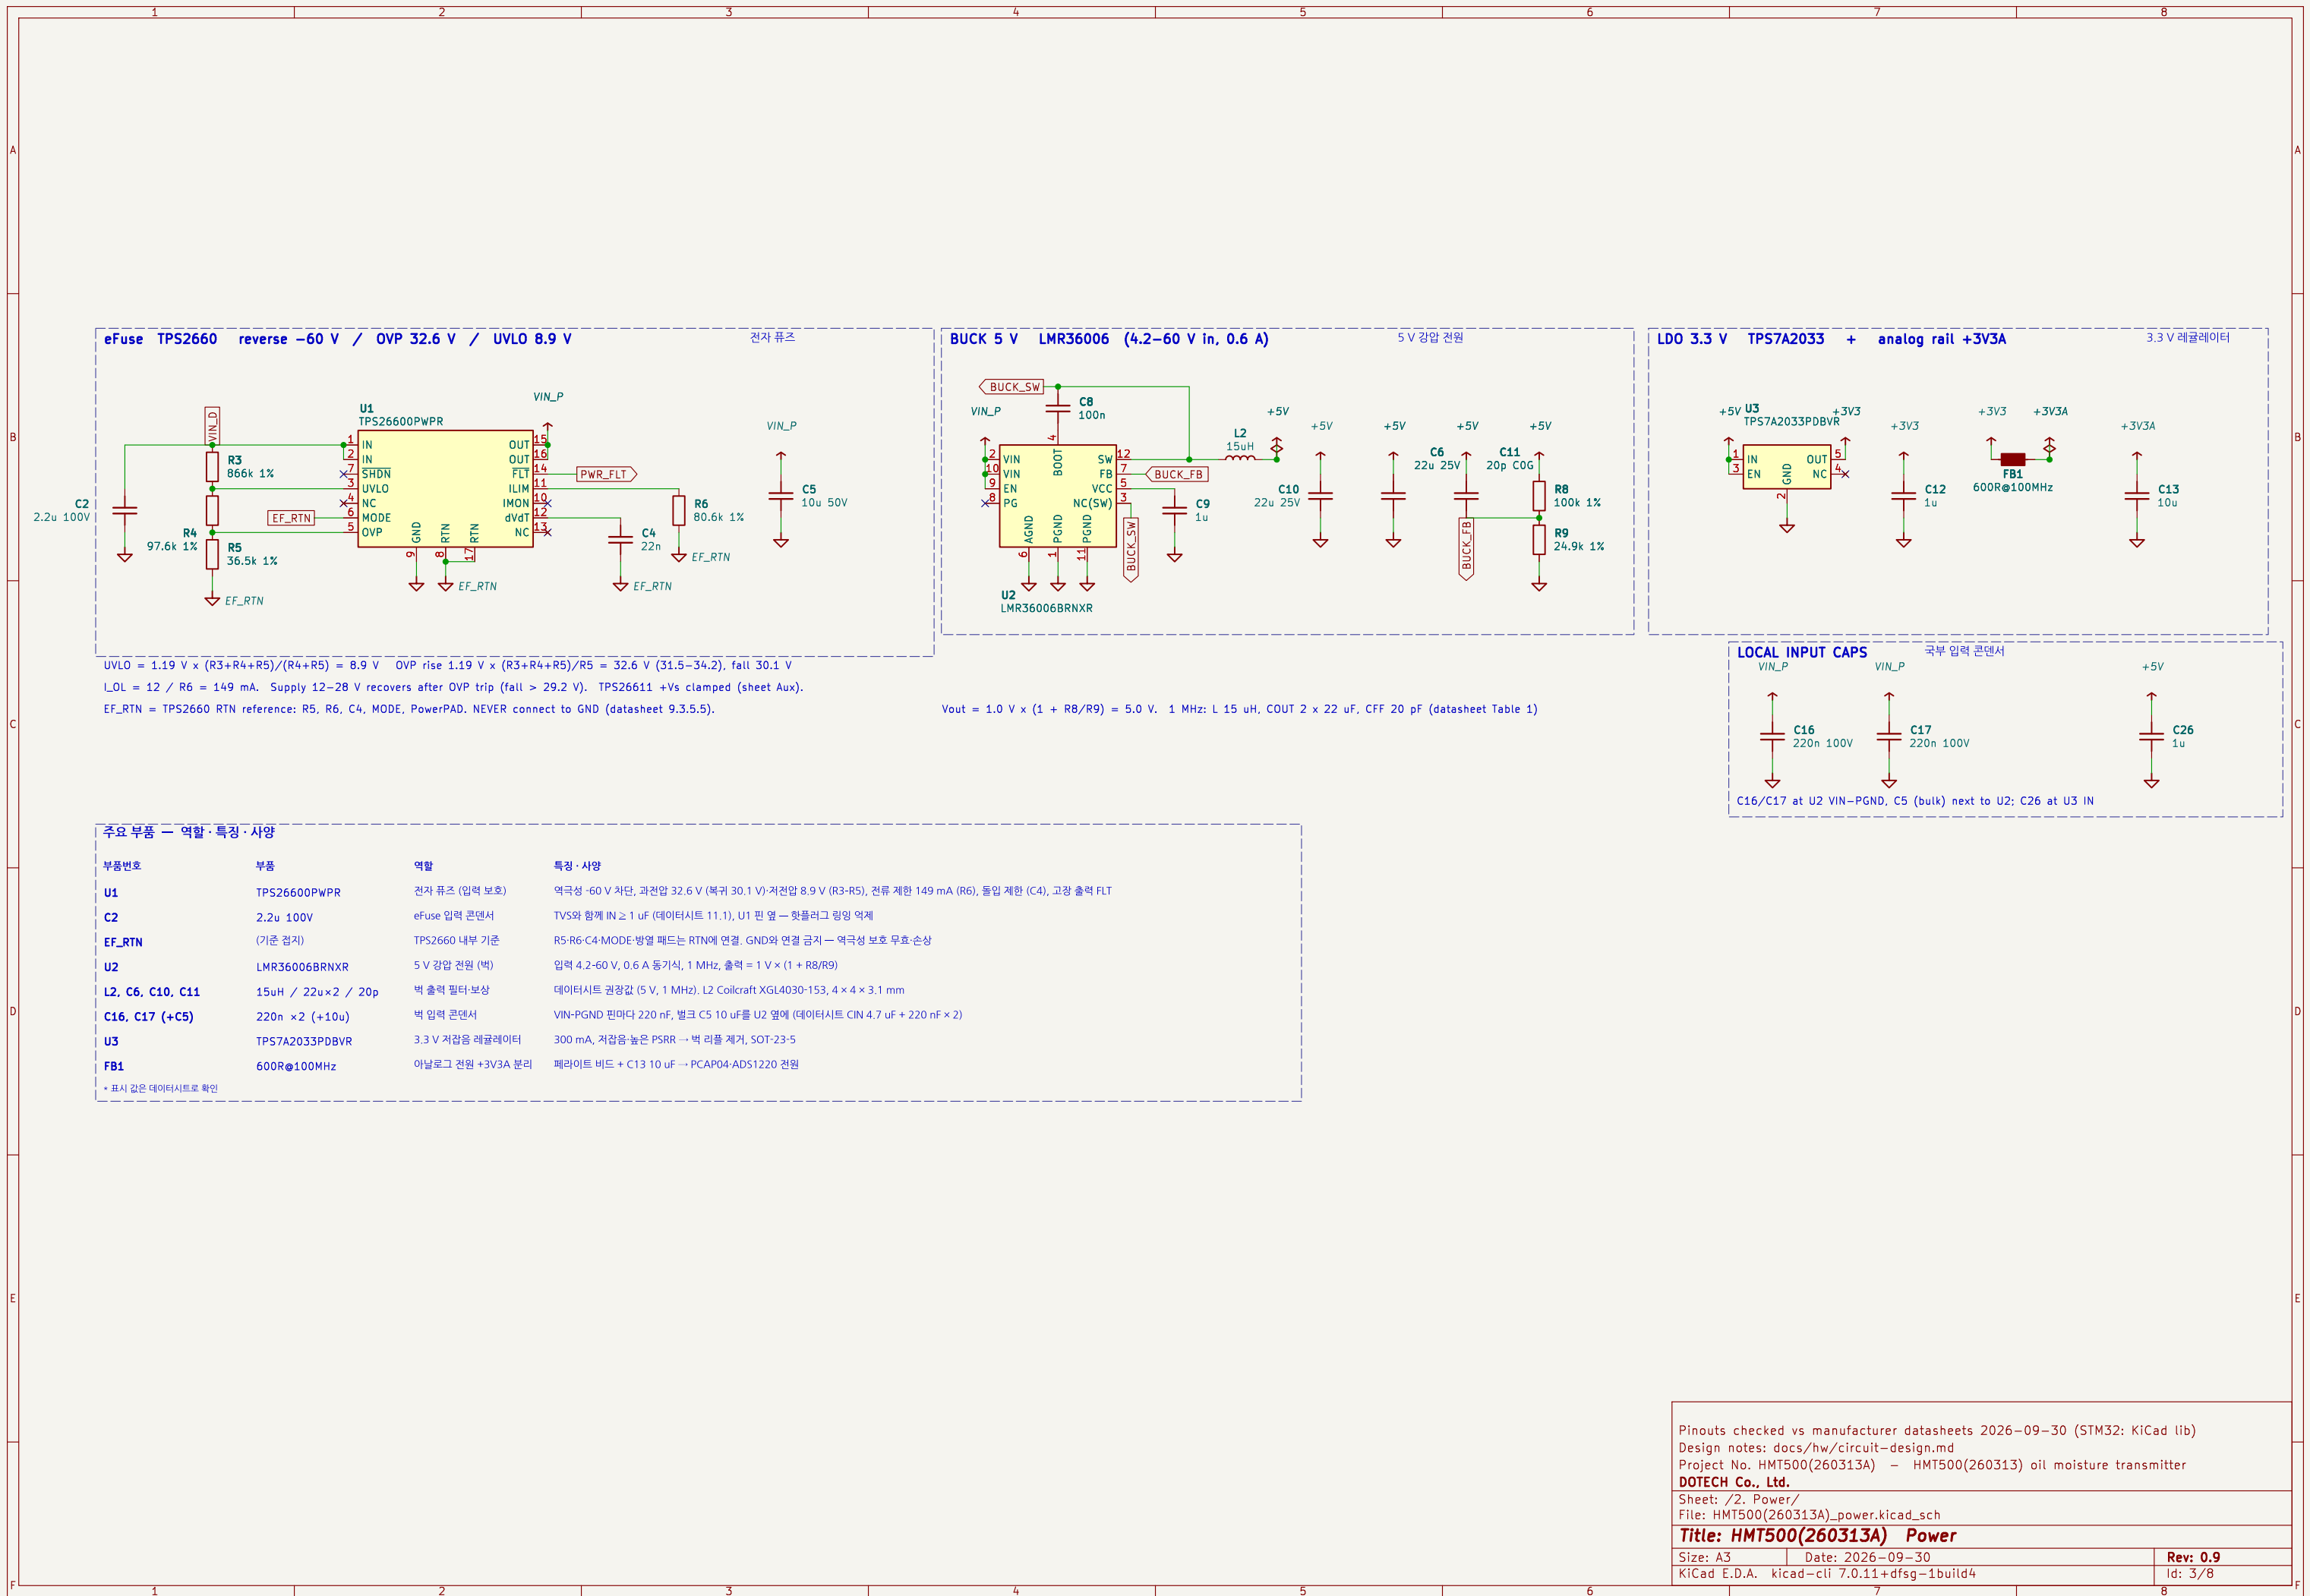

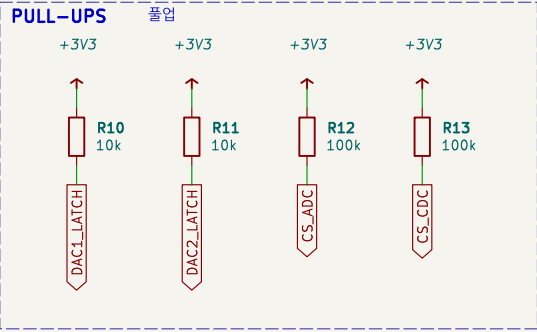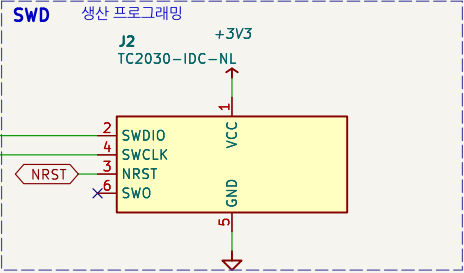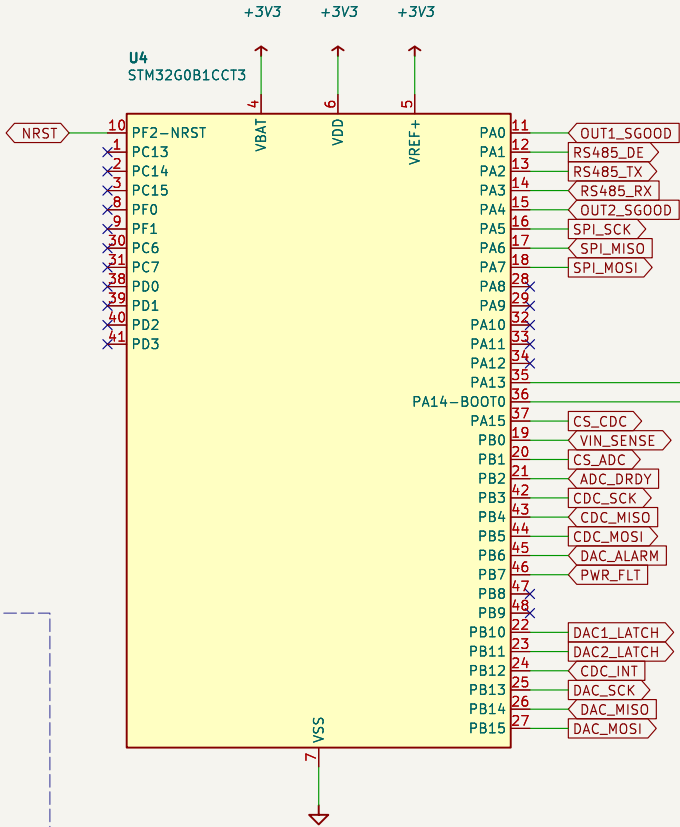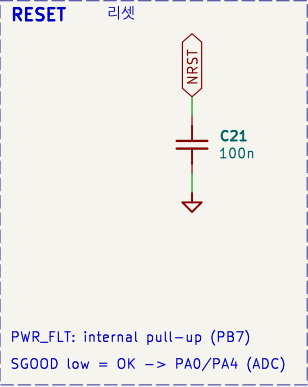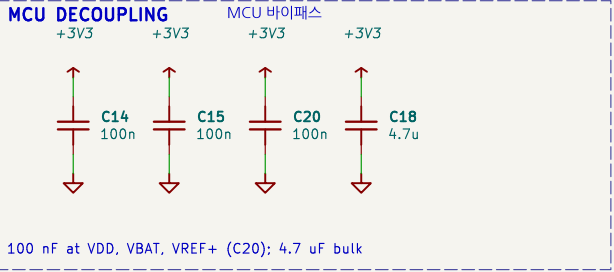

MCU NOTES (STM32G0B1) MCU 설정 메모

BOOT0 shares PA14/SWCLK - no pull-down.

Option bytes: nBOOT_SEL=1, nBOOT0=1, IWDG_SW=0, RDP 1

-> in-house RS-485 bootloader 0x08000000 (dec. #31).

VDDA = VDD (LQFP48); VREF+ tied to +3V3 (C20).

PCB temp (mid): internal sensor, ADC ch TS + TS_CAL.

Cortex-M0+: no SWO (J2 pin 6 NC).

Same die as DP2000 (G0B1CCT6); T3 = -40..125 C.

VIN_SENSE (PB0 ADC_IN8) = VIN_P / 11.

주요 부품 — 역할 · 특징 · 사양

부품번호	부품	역할	특징 · 사양
U4	STM32G0B1CCT3	제어-통신-보정 연산	Cortex-M0+ 64 MHz, 플래시 256 KB, RAM 144 KB, -40-125 °C, LQFP48, 내부 온도센서 (PCB 온도). SPI1 = ADS1220, SPI2 = DAC (모드 3, SCLK 게이트), SPI3 = PCAP04
J2	TC2030-IDC-NL	생산 매 펌웨어 기록 (SWD)	PCB 패드만 (부품 없음). 이후 업데이트는 RS-485 부트로더
C21	100n	리셋 노이즈 필터	NRST 핀, 물딩 후 EMC 여유
R10, R11	10k	DAC LATCH 풀업	리셋 중 LATCH High -> SCLK 게이트 닫힘, DAC 오입력 방지 (v0.9)
R12, R13	100k	CS 풀업	리셋 중 ADS1220-PCAP04 선택 해제 (디지털 임력 부동 금지)






* 표시 값은 데이터시트로 확인

Pinouts checked vs manufacturer datasheets 2026-09-30 (STM32: KiCad lib)
Design notes: docs/hw/circuit-design.md
Project No. HMT500(260313A) - HMT500(260313) oil moisture transmitter
DOTTECH Co., Ltd.

Sheet: /3. MCU/
File: HMT500(260313A)_mcu.kicad_sch

Title: HMT500(260313A) MCU

Size: A3	Date: 2026-09-30	Rev: 0.9
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 4/8

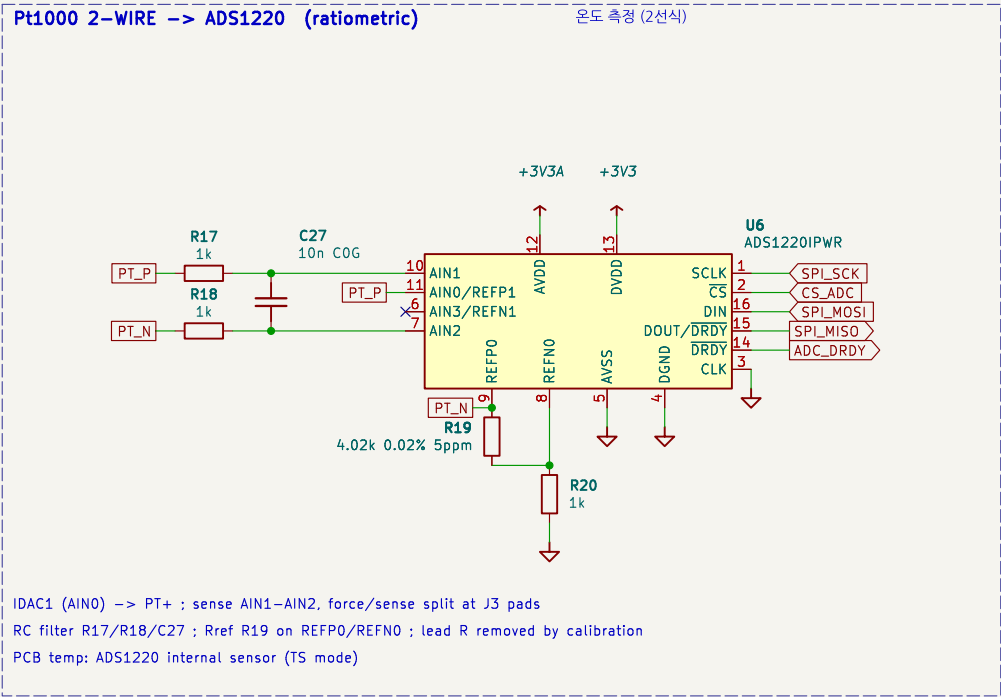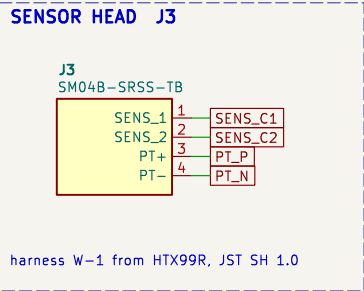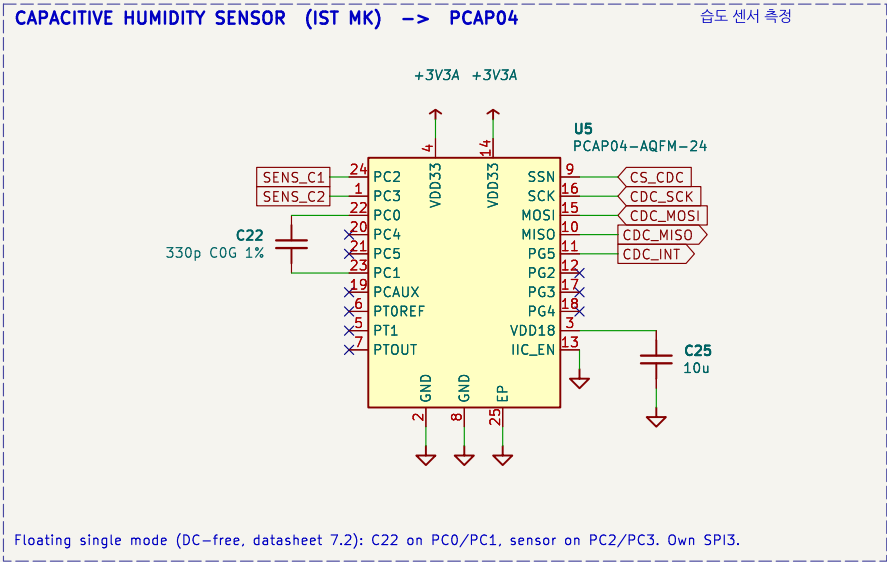

주요 부품 — 역할·특징·사양			
부품번호	부품	역할	특징·사양
J3	SM04B-SRSS-TB	센서 하네스 W-1 연결	JST SH 1.0 mm 4P 옆 삽입, 1-2 = MK33, 3-4 = Pt1000
U5	PCAP04-AQFM-24	습도 센서 정전용량 측정	정전용량-디지털 변환, 기준 C와 비율 측정(방전 시간), DC 없는 구동, 내부 DSP, 전용 SPI3 (모드 1)
C25, C24	10u / 22u	PCAP04 전원 버퍼	VDD18 ≥ 4.7 uF, VDD33 ≥ 10 uF (데이터시트 표 2) — DC 바이어스 후에도 총폭 (v0.9)
C22	330p COG 1%	PCAP04 기준 용량	센서 MK33-W (300 pF, 결정 #33) 측정 범위 가운데 값, COG
U6	ADS1220IPWR	Pt1000 온도 측정	24비트 ADC, 50/60 Hz 제거, 내부 온도센서 (PCB 온도), 설정: IDAC = 250 uA 고정 (100 uA면 기준 0.40 V < 권장 0.75 V), PGA ≤ 2 (SPI1 모드 1)
R19	4.02k 0.02% 5ppm	Pt1000 비율 측정 기준저항	IDAC 전류 오차 상쇄, 온도계수 5 ppm/°C
R17, R18, C27	1k / 10n COG	입력 RC 필터	차동 노이즈 제거 (COG, 데이터시트 9.2)

* 표시 값은 데이터시트로 확인

Pinouts checked vs manufacturer datasheets 2026-09-30 (STM32: KiCad lib)
Design notes: docs/hw/circuit-design.md
Project No. HMT500(260313A) — HMT500(260313) oil moisture transmitter
DOTECH Co., Ltd.


Sheet: /4. Measurement/
File: HMT500(260313A)_measurement.kicad_sch

Title: HMT500(260313A) Measurement

Size: A3	Date: 2026-09-30	Rev: 0.9
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 5/8

ANALOG OUTPUT CH1 - V/I selectable, miswiring protected -> connector pin 4


아날로그 출력 1

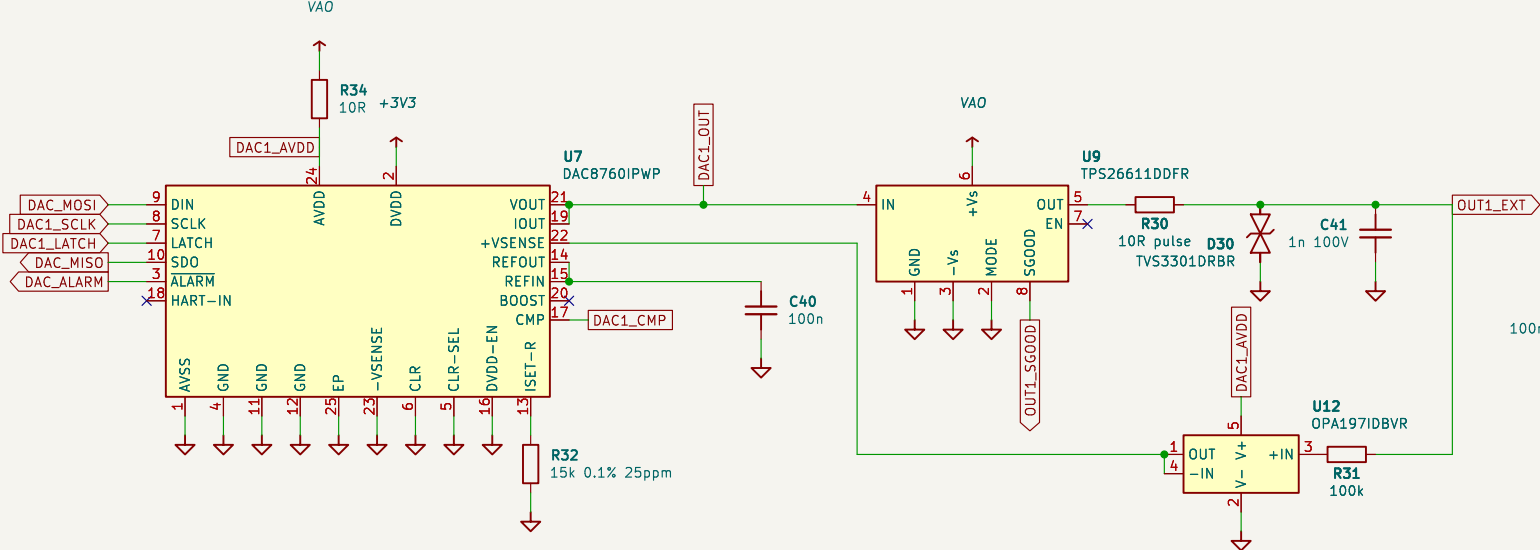

VOUT + IOUT one terminal (datasheet 9.1.1.3). +VSENSE = U12 OPA197 follower of terminal OUT1_EXT (after R30) via R31:
no +VSENSE 60k leakage in current mode, series-R drop corrected in voltage mode. ISET-R = R32 15k 0.1%. SGOOD low = OK.

CH1 DECOUPLING

채널 1 바이패스

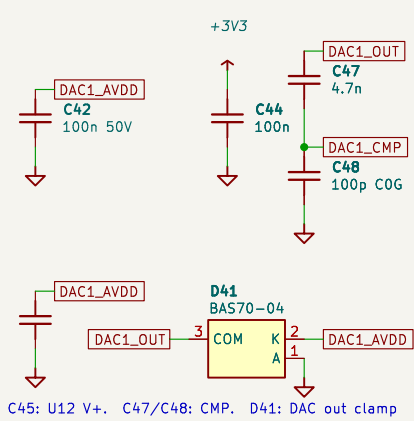

C45: U12 V+. C47/C48: CMP. D41: DAC out clamp

DAC SELECTION (decision #10)

DAC 선정

U7/U8 fitted: DAC8760 (16-bit, I + V output).

Drop-in alternates (same pinout, no layout change):

DAC7760 12-bit, I + V (cost-down, V/I kept)

DAC8750 16-bit, I only 4-20/0-20/0-24 mA (EE364-equiv.)

DAC7750 12-bit, I only (-5 uA/step vs EE364 2 uA)

Current-only (x750): VOUT/+VSENSE/-VSENSE absent -

check pin handling before fitting (VERIFY).

DAC SPI - SPI2, SCLK gated per DAC

DAC 전용 SPI

DAC8760 rev D: daisy chain removed; multiple devices

need gated SCLK (datasheet 8.5.1.5, Fig. 8-9).

SPI2 mode 3 (CPOL 1, CPHA 1): SCK idles high, so the


OR gate gives no extra edge at LATCH low/high.

DACn_SCLK = DAC_SCLK OR DACn_LATCH (PB10 / PB11).

DIN and SDO shared (SDO 3-state after LATCH).


ALARM: open drain, wired-OR, R33 10k pull-up:

which channel -> read status register.

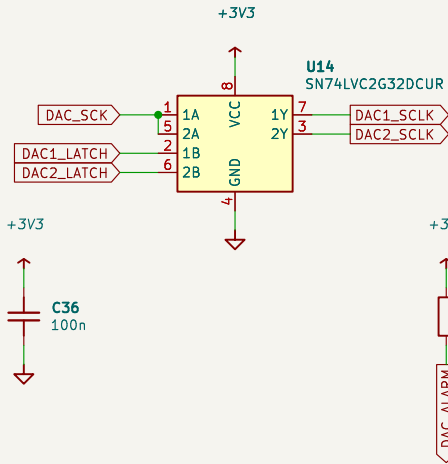

ANALOG OUTPUT CH2 - V/I selectable, miswiring protected -> connector pin 5


아날로그 출력 2

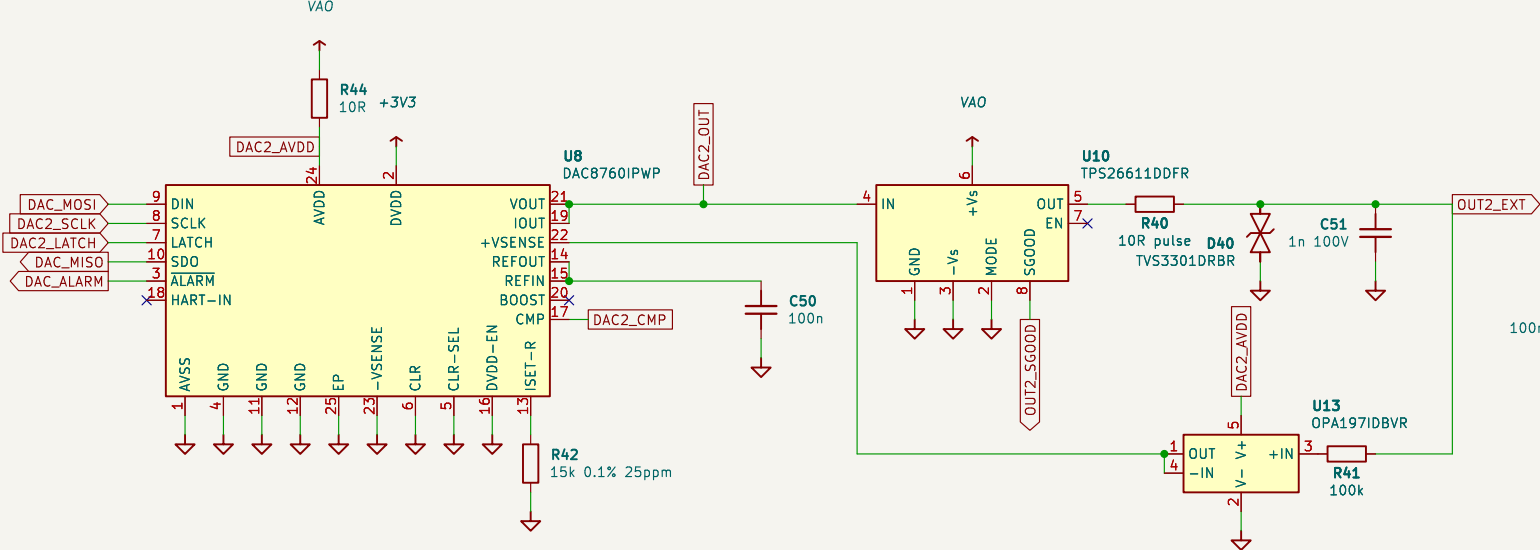

VOUT + IOUT one terminal (datasheet 9.1.1.3). +VSENSE = U13 OPA197 follower of terminal OUT2_EXT (after R40) via R41:
no +VSENSE 60k leakage in current mode, series-R drop corrected in voltage mode. ISET-R = R42 15k 0.1%. SGOOD low = OK.

CH2 DECOUPLING

채널 2 바이패스

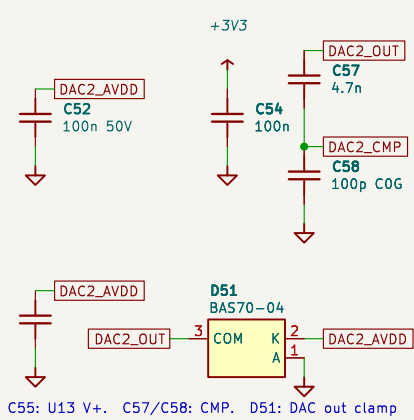

C55: U13 V+. C57/C58: CMP. D51: DAC out clamp

주요 부품 - 역할·특징·사양

부품번호	부품	역할	특징·사양
U7, U8	DAC8760IPWP	아날로그 출력 1·2	16비트, 4-20 / 0-20 / 0-24 mA · 0-5 / 0-10 V 선택, 내부 기준, 고장 알람 — 대체 DAC7760/8750/7750
U9, U10	TPS26611DDFR	출력 오걸선 보호	±50 V, 단자 > +Vs 또는 < -0.2 V면 5 us 차단·자동 복귀, 전류 제한 32 mA, RON 7.5 Ω, SGOOD Low = 경상. +Vs = VAO 16.1 V (백, 시트 Aux, 결정 #37)
R30, R40	10R pulse (2512)	서지 전류 제한	출력 보호기와 TVS 사이 직렬
D30, D40	TVS3301DRBR	출력 서지 클램프	TI 평탄 클램프 33 V 양방향, 40 V @ 27 A — TPS26611 ±55 V 보호 (데이터시트 권장)
C41, C51	1n 100V	출력 고주파 필터	케이블로 들어오는 RF 억제
U12, U13	OPA197IDBVR	+VSENSE 버퍼 (이득 1)	36 V, 임출력 레일투레일 — 단자 전압을 +VSENSE로, 전류 모드 누설 0. V+ = DAC AVDD
R31, R41	100k	버퍼 입력 보호	R30-R40 뒤 단자 전압을 OPA197 + 입력으로 (서지 전류 제한, ±30 V 오배선 9 mW, v0.9)
R32, R42	15k 0.1% 25ppm	외부 ISET-R (전류 기준)	내부 저항보다 온도 드리프트 작음 (REXT 비트 설정)
R34, R44	10R	DAC AVDD 직렬	VAO → AVDD, 전원 상승 속도 제한 (데이터시트 10장)
C47/C48, C57/C58	4.7n / 100p C0G	DAC CMP 보상	VOUT-CMP 4.7 nF + CMP-GND 100 pF (SBAS528D 8.3.2: 470 pF 초과 시 100 pF 추가) — 케이블 용량·보호기 RON 포함 루프 안정 (IVS320 AO rev 1.0)
D41, D51	BAS70-04	DAC 출력 클램프	DAC 출력 줄을 GND - 0.3 V ~ AVDD + 0.3 V로 — TPS26611 차단-재연결 순간 DAC 핀 보호 (외부 검수 H03, IVS320과 동일)
U14	SN74LVC2G32DCUR	DAC별 SCLK 게이트	OR 2회로: DACn_SCLK = SCK OR LATCHn (SPI2 모드 3)
R33	10k	ALARM 풀업	오픈 드레인 ALARM 두 개를 한 선으로 (데이터시트: 외부 10 kΩ)

* 표시 값은 데이터시트로 확인

Pinouts checked vs manufacturer datasheets 2026-09-30 (STM32: KiCad lib)

Design notes: docs/hw/circuit-design.md

Project No. HMT500(260313A) — HMT500(260313) oil moisture transmitter

DOTECH Co., Ltd.

Sheet: /5. Analog outputs/

File: HMT500(260313A)_analog_out.kicad_sch

Title: HMT500(260313A) Analog outputs

Size: A3 Date: 2026-09-30

Rev: 0.9

KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4

Id: 6/8

