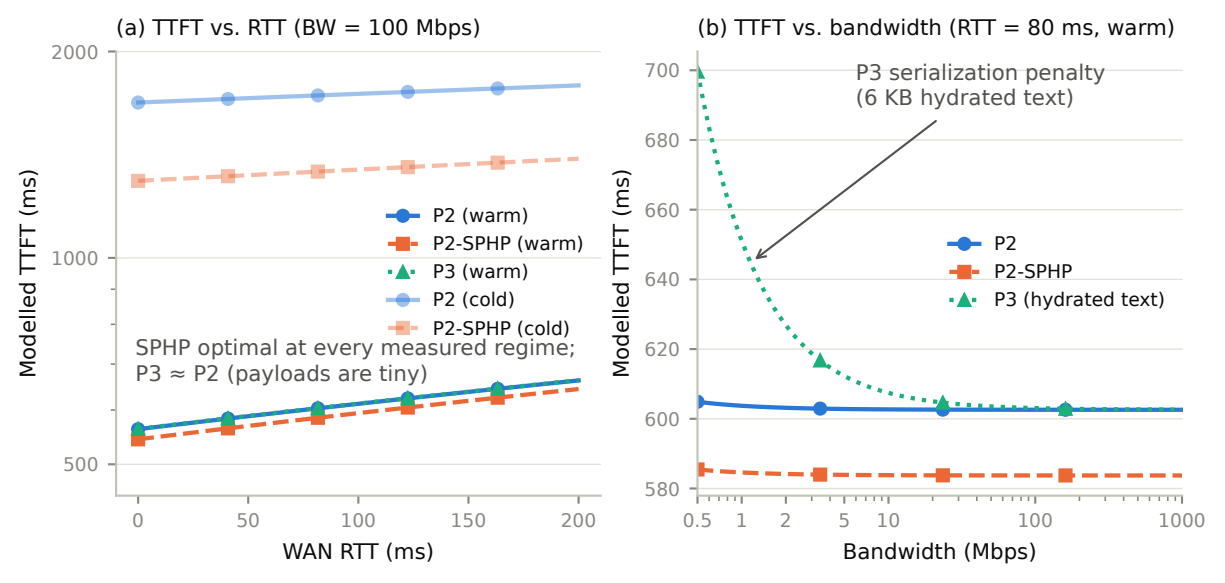
(a) TTFT vs. RTT (BW = 100 Mbps)
Modelled TTFT (ms)
2000
1000
500
0
50
100
150
200
WAN RTT (ms)
P2 (warm)
P2-SPHP (warm)
P3 (warm)
P2 (cold)
P2-SPHP (cold)
SPHP optimal at every measured regime;
P3 ≈ P2 (payloads are tiny)
(b) TTFT vs. bandwidth (RTT = 80 ms, warm)
Modelled TTFT (ms)
700
680
660
640
620
600
580
P3 serialization penalty
(6 KB hydrated text)
P2
P2-SPHP
P3 (hydrated text)
0.5
1
2
5
10
100
1000
Bandwidth (Mbps)