Home
Report Properties
Simulation Model 1
Study 1 - Static Stress
Study Properties
Study Setup
Load Case0
Load Case0 - Guided Results
Load Case0 - Results
Home
Report Properties
Simulation Model 1
Study 1 - Static Stress
Study Properties
Study Setup
Load Case0
Load Case0 - Guided Results
Load Case0 - Results
Home
Report Properties
Simulation Model 1
Study 1 - Static Stress
Study Properties
Study Setup
Load Case0
Load Case0 - Guided Results
Load Case0 - Results
Home
Report Properties
Simulation Model 1
Study 1 - Static Stress
Study Properties
Study Setup
Load Case0
Load Case0 - Guided Results
Load Case0 - Results

Study Report

AUTODESK



Analysis Title	Lattice Structure - Bam Media	Version	Autodesk Fusion (2026.1.0)
Creation Date	2026-02-27, 14:43:32	Status	Solver Queued

Report Properties

Report Properties	
Author	bambi
Notes	screw-shaped

Simulation Model 1

Study 1 - Static Stress

Study Properties

Study Properties	
Study Type	Linear Stress
Last Modification Date	2026-02-27, 14:43:47

Study Setup

Settings	
General	
Analysis Type	3-D solid
Average Element Size	1%
Mesh	
Average Element Size % of model size	1%
Small feed size % of average size	10%
Average Element Size (absolute value)	
Mesh Type	Parabolic
Curvature Refinement	18
Min. Num Mesh at Curved Edge	30
Max. Mesh Growth Ratio	1.5
Max. Aspect Ratio	10
Max. Aspect Ratio % of average size	1000%
Adaptive Mesh Refinement	
Number of Refinement Steps	3
Convergence Tolerance (%)	10
Number of Elements to Refine (%)	20
Remove Fin Bend Fillets	on Mesh Stress

Materials	
Assignments	
Unassigned	Strength
Steel	Yield Strength
Properties	
Density	7.8E-06 kg/mm^3
Young's Modulus	210 GPa
Poisson's Ratio	0.29
Yield Strength	345E-3MPa
Ultimate Tensile Strength	400 MPa
Thermal Conductivity	14W/(K·m) (0.12W/(K·cm))
Thermal Expansion Coefficient	1E-05 1/K
Specific Heat	470 J/(K·kg) (0 J/(K·t))

Contacts				
Contact	Contact Set	Resultant Type	Enable	Initially
	(All) Bondable	Symmetric	Always Calculate Model in Always Simulation Model (1)	Close Gap/Close Gaps
	(All) Bondable	Symmetric	Always Calculate Model in Always Simulation Model (1)	Close Gap/Close Gaps

Mesh	
Type	solid
Nodes	0
Elements	0

Load Case0

Loads	
Mesh	



Type	Fixed
Faces	1 Face
Fixed	Fixed
UR	Free

Loads	
Linear Static Load	



Type	Linear Static Load
Acceleration	
X Value	0.00 m/s^2
Y Value	9.81 m/s^2
Z Value	0.00 m/s^2

Load Case0 - Guided Results

Safety Factor	
Safety Factor	

Safety Factor
Safety Factor
Safety Factor

Total Deformation	0.0000 m	0.00000 m
Maximum Principal	1.2E+07 Pa	1.7E+07 Pa
Mid Principal	-1.4E+06 Pa	-1.7E+06 Pa
Minimum Pa	-2.5E+07 Pa	-2.8E+07 Pa
Normal XX	-1.8E+06 Pa	-1.8E+06 Pa
Normal YY	-1.9E+07 Pa	-2.1E+06 Pa
Normal ZZ	-1.9E+07 Pa	-2.1E+06 Pa
Shear XY	1.4E+06 Pa	1.4E+06 Pa
Shear YZ	1.1E+06 Pa	1.8E+06 Pa
Shear XZ	4.9E+06 Pa	7.0E+06 Pa

Contact Pressure

Total	0 Pa	0.00 Pa
X	-0.000 MPa	0.00 MPa
Y	-0.000 MPa	0.00 MPa
Z	-0.000 MPa	0.00 MPa

Contact Force

Total	0 N	0.00 N
X	-0.000 N	0.00 N
Y	-0.000 N	0.00 N
Z	-0.000 N	0.00 N

Safety Factor

Safety Factor



Stress

Max Stress



1st Principal



3rd Principal



Displacement



Load Case3

Geometry

Model



Type	Solid
TE	Solid
TI	Solid
TR	Solid

Units

Linear Global Load1



Type	Linear Global Load
Acceleration	
X Direction	0.00 m/s^2
Y Direction	9.81 m/s^2
Z Direction	0.00 m/s^2

Load Case3 - Guided Results

Safety Factor



Not Yet Analyzed

Next Step: With the adaptive criterion this study along, there is opportunity to reduce the volume of material and cost of this design.

Adaptive Sizing Factor Limit

Remove such cells if:

- Factor of Safety is greater than 15.00
- Cells that are not connected to other cells (including in a group of large size)

Keep such cells if:

- Factor of Safety is within lower value (high displacement, slender cantilever) and Maximum value (low stress) of Factor of Safety range

Check the results:

- Examine the Factor of Safety and Stress of remaining cells to see the stress concentration
- Check the displacement to see if it is within the allowable limit
- Check the displacement result to see that the Factor of Safety and Stress of remaining cells to see the stress concentration
- Check the displacement result to see that the Factor of Safety and Stress of remaining cells to see the stress concentration

Lightweight the design:

- Set a Factor of Safety upper limit of the initial material and re-run solver
- Remove unnecessary material using a larger Adaptive Sizing Factor

Generate structurally efficient design:

- Remove unnecessary material using a lower Adaptive Sizing Factor
- Remove unnecessary material using a larger Adaptive Sizing Factor

Load Case3 - Results

Model Summary

Model Item	Case Input	Minimum	Maximum
Safety Factor	Safety Factor	2.27E-7kW	3E+01+1.07E-
Stress			
	Stress Intensity	-1.0000E+07 MPa	0.0000 MPa
	1st Principal	-0.0000 MPa	0.0000 MPa
	2nd Principal	-0.0000 MPa	0.0000 MPa
	3rd Principal	-1.0000E+07 MPa	0.0000 MPa
	Normal XX	-0.0000 MPa	0.0000 MPa
	Normal YY	-0.0000 MPa	0.0000 MPa
	Normal ZZ	-0.0000 MPa	0.0000 MPa
	Shear XY	-0.0000 MPa	0.0000 MPa
	Shear YZ	-0.0000 MPa	0.0000 MPa
	Shear XZ	-0.0000 MPa	0.0000 MPa
Displacement			
	Total	0 m	0.00000 m
	X	-0.0000 m	0.0000 m
	Y	-0.0000 m	0.0000 m
	Z	-0.0000 m	0.0000 m
Reaction Force			
	Total	0 N	0.00 N
	X	-0.00 N	0.00 N
	Y	-0.000 N	0.00 N
	Z	-0.00 N	0 N
Strain			
	Intensity	-0.0000 m/m	0.0000 m/m
	1st Principal	-1.0E-06	1.0E-05
	3rd Principal	-7.0E-06	-6.0E-07
	Normal XX	-3.0E-06	2.8E-05
	Normal YY	-1.0E-06	1.0E-05
	Normal ZZ	-1.0E-06	1.0E-05
	Shear XY	-2.9E-06	2.7E-06
	Shear YZ	-8.3E-06	1.0E-05
	Shear XZ	-7.6E-06	1.0E-05
Contact Pressure			
	Total	0 Pa	0.00 Pa
	X	-0.007 MPa	0.007 MPa
	Y	-0.007 MPa	0.007 MPa
	Z	-0.008 MPa	0.008 MPa
Contact Force			
	Total	0 N	0.00 N
	X	-0.000 N	0.000 N
	Y	-0.000 N	0.000 N
	Z	-0.007 N	0.000 N

Safety Factor

Safety Factor



Stress

Max Stress



1st Principal



3rd Principal



Displacement

Max



Load Cases

Geometry

Model



Type	Solid
TE	Solid
TI	Solid
TR	Solid

Units

Linear Global Load1



Type	Linear Global Load
Acceleration	
X Direction	0.00 m/s^2
Y Direction	9.81 m/s^2
Z Direction	0.00 m/s^2

Load Cases - Guided Results

Safety Factor



Not Yet Analyzed

Next Step: With the adaptive criterion this study along, there is opportunity to reduce the volume of material and cost of this design.

Adaptive Sizing Factor Limit

Remove such cells if:

- Factor of Safety is greater than 15.00
- Cells that are not connected to other cells (including in a group of large size)

Keep such cells if:

- Factor of Safety is within lower value (high displacement, slender cantilever) and Maximum value (low stress) of Factor of Safety range

Next Steps

Check design issues

- Examine the detailed design feedback in case there is the solution some are
- Improve the design models and re-run analysis, for example length scale
- Check the displacements result to see that the flow for engineering properties meets the requirement
- Adjust the design models and re-run analysis, for example length scale, to improve the structural material performance

Lightweight the design

- Use the topology optimization tool to find the material distribution in the design domain
- Remove unnecessary material using a finer topology optimization

Optimize the design for manufacturing

- Use the topology optimization tool to find the material distribution in the design domain
- Remove unnecessary material using a finer topology optimization

Load Case1 - Results

Result Summary			
Result Load	Load result	Minimum	Maximum
Safety Factor			
	Safety Factor	Max Fail	999,999,76
Stress			
	Von Mises	0,0001-05 MPa	0,014 MPa
	1st Principal	-0,016 MPa	0,016 MPa
	3rd Principal	-0,021 MPa	0,011 MPa
	Normal XX	-0,016 MPa	0,016 MPa
	Normal YY	-0,021 MPa	0,011 MPa
	Normal ZZ	-0,018 MPa	0,018 MPa
	Shear XY	-0,014 MPa	0,014 MPa
	Shear YZ	-0,014 MPa	0,014 MPa
	Shear XZ	-0,013 MPa	0,016 MPa
Displacement			
	Total	0 mm	0,0755 26 mm
	X	-0,0755 26 mm	0,0755 26 mm
	Y	-1,18E-05 mm	1,18E-05 mm
	Z	0 mm	1,07E-05 mm
Reaction Force			
	Total	0 N	0,0 N
	X	-0,002 N	0,001 N
	Y	0 N	0,001 N
	Z	0,0 N	0 N
Strain			
	Equivalent	2,56E-08	1,27E-04
	1st Principal	-1,09E-08	1,92E-05
	3rd Principal	-1,87E-05	1,12E-08
	Normal XX	-5,05E-06	4,78E-06
	Normal YY	-1,87E-05	1,12E-08
	Normal ZZ	-1,78E-05	1,92E-05
	Shear XY	-2,54E-06	1,86E-05
	Shear YZ	-1,62E-05	1,62E-05
	Shear XZ	-1,86E-05	2,57E-06
Contact Pressure			
	Total	0 MPa	0,016 MPa
	X	-0,012 MPa	0,014 MPa
	Y	-0,016 MPa	0,016 MPa
	Z	-0,014 MPa	0,016 MPa
Contact Force			
	Total	0 N	0,016 N
	X	-0,014 N	0,012 N
	Y	-0,016 N	0,016 N
	Z	-0,014 N	0,016 N

Safety Factor

Max Fail



Stress

Von Mises



1st Principal



3rd Principal



Displacement



Load Case5

Geometry

Model



Type	Model
Mass	0 kg
CG	Origin

Mesh

Global Solid Coarse



Type	Global Solid Coarse
Nodes/Elements	
Nodes	5,85E+05 [1]
Elements	3,40E+05 [1]
Criteria	

Load Case5 - Suggested Results

Safety Factor



Check design issues

- Examine the detailed design feedback in case there is the solution some are
- Improve the design models and re-run analysis, for example length scale
- Check the displacements result to see that the flow for engineering properties meets the requirement
- Adjust the design models and re-run analysis, for example length scale, to improve the structural material performance

Lightweight the design

- Use the topology optimization tool to find the material distribution in the design domain
- Remove unnecessary material using a finer topology optimization

Optimize the design for manufacturing

- Use the topology optimization tool to find the material distribution in the design domain
- Remove unnecessary material using a finer topology optimization

Next Steps

Load Case5 - Results

Result Summary			
Result Load	Load result	Minimum	Maximum
Safety Factor			
	Safety Factor	0,05	1,89E+03 [1]
Stress			
	Von Mises	0,00-05 MPa	0,016 MPa
	1st Principal	-0,016 MPa	0,016 MPa
	3rd Principal	-0,018 MPa	0,016 MPa
	Normal XX	-0,016 MPa	0,016 MPa
	Normal YY	-0,01 MPa	0,016 MPa
	Normal ZZ	-0,01 MPa	0,018 MPa
	Shear XY	-0,016 MPa	0,016 MPa
	Shear YZ	-0,012 MPa	0,016 MPa
	Shear XZ	-0,013 MPa	0,016 MPa
Displacement			
	Total	0 mm	1,08E-05 mm
	X	-1,08E-05 mm	1,08E-05 mm
	Y	5,23E-06 mm	1,08E-05 mm
	Z	0 mm	1,08E-05 mm
Reaction Force			
	Total	0 N	0,016 N
	X	-0,002 N	0,001 N
	Y	0,001 N	0,016 N
	Z	0,001 N	0 N
Strain			
	Equivalent	2,00E-08	1,27E-05
	1st Principal	-1,75E-08	1,92E-05
	3rd Principal	-1,07E-05	1,12E-08
	Normal XX	-4,35E-06	4,78E-06
	Normal YY	-1,07E-05	1,12E-08
	Normal ZZ	-1,07E-05	1,92E-05
	Shear XY	-1,79E-06	1,87E-05
	Shear YZ	-1,08E-05	1,62E-05
	Shear XZ	-1,87E-05	1,79E-06
Contact Pressure			
	Total	0 MPa	0,016 MPa
	X	-0,012 MPa	0,016 MPa
	Y	-0,016 MPa	0,016 MPa
	Z	-0,017 MPa	0,01 MPa
Contact Force			
	Total	0 N	0,016 N
	X	-0,012 N	0,016 N
	Y	-0,016 N	0,016 N
	Z	-0,01 N	0,016 N

Safety Factor

Max Fail



Stress

Von Mises



1st Principal



3rd Principal



Displacement



Load Case6

Geometry

Model



Type	Model
Mass	0 kg
CG	Origin

Mesh

Global Solid Coarse

Type	Linear Global Load
Accelerations	
Y Direction	9.81 m/s^2
Z Direction	9.81 m/s^2
Unit	Metric

Load Case0 - Guided Results

Safety Factor



With the analysis based on the load case 0 the design is expected to fail(not passing the yield).

Start Ideas

Design Safety Factor Unit

Material case study

- Change the material to a steel with higher yield strength.
- Change the material to a steel with higher yield strength.
- Change the material to a steel with higher yield strength.

Pick other Ideas

- Change the Design Safety Factor Unit(Unit) to a case where the material yields and
- Change the Design Safety Factor Unit(Unit) to a case where the material yields and
- Change the Design Safety Factor Unit(Unit) to a case where the material yields and

Generate alternative designs

- Add more material to weak areas
- Add more material to weak areas
- Add more material to weak areas
- Reduce material in areas with low stress
- Reduce material in areas with low stress
- Reduce material in areas with low stress

Design Safety Factor Unit

Material case study

- Change the material to a steel with higher yield strength.
- Change the material to a steel with higher yield strength.
- Change the material to a steel with higher yield strength.

Pick other Ideas

- Change the Design Safety Factor Unit(Unit) to a case where the material yields and
- Change the Design Safety Factor Unit(Unit) to a case where the material yields and
- Change the Design Safety Factor Unit(Unit) to a case where the material yields and

Generate alternative designs

- Add more material to weak areas
- Add more material to weak areas
- Add more material to weak areas
- Reduce material in areas with low stress
- Reduce material in areas with low stress
- Reduce material in areas with low stress

Lightweight the design

- Reduce material in areas where the stress is low and the material yields not the intended
- Reduce material in areas where the stress is low and the material yields not the intended
- Reduce material in areas where the stress is low and the material yields not the intended

Generate alternative designs

- Reduce material in areas where the stress is low and the material yields not the intended
- Reduce material in areas where the stress is low and the material yields not the intended
- Reduce material in areas where the stress is low and the material yields not the intended

Load Case0 - Results

Result Summary			
Name	Last Result	Minimum	Maximum
Safety Factor			
	Safety Factor	295.26	1.86e+15e+295
Stress			
	Von Mises	0.0000 GN/MPa	2.0000e+295e
	1st Principal	-0.0000 MPa	0.1235 MPa
	2nd Principal	-0.0000 MPa	0.0000 MPa
	3rd Principal	-0.0000 MPa	-0.0000 MPa
	Normal XX	-0.0000 MPa	0.0000 MPa
	Normal YY	-0.0000 MPa	0.0000 MPa
	Normal ZZ	-0.0000 MPa	0.0000 MPa
	Shear XY	-0.0000 MPa	0.0000 MPa
	Shear YZ	-0.0000 MPa	0.0000 MPa
	Shear XZ	-0.0000 MPa	0.0000 MPa
Displacement			
	Total	0 mm	0.0000 mm
	X	-0.0000 mm	0.0000 mm
	Y	-0.0000 mm	0.0000 mm
	Z	-0.0000 mm	0.0000 mm
Reaction Force			
	Total	0 N	0.000 N
	X	-0.000 N	0.000 N
	Y	-0.000 N	0.000 N
	Z	-0.000 N	0.000 N
Strain			
	Equivalent	-1.0E-17 ME	1.0000E-15
	1st Principal	-0.0000 ME	0.0000 ME
	2nd Principal	-0.0000 ME	-1.0000 ME
	3rd Principal	-0.0000 ME	-0.0000 ME
	Normal XX	-0.0000 ME	0.0000 ME
	Normal YY	-0.0000 ME	0.0000 ME
	Normal ZZ	-0.0000 ME	0.0000 ME
	Shear XY	-0.0000 ME	0.0000 ME
	Shear YZ	-0.0000 ME	0.0000 ME
	Shear XZ	-0.0000 ME	0.0000 ME
Contact Pressure			
	Total	0 MPa	0.000 MPa
	X	-0.00 MPa	0.00 MPa
	Y	-0.00 MPa	0.00 MPa
	Z	-0.00 MPa	0.00 MPa
Contact Force			
	Total	0 N	0.000 N
	X	-0.000 N	0.000 N
	Y	-0.000 N	0.000 N
	Z	-0.000 N	0.000 N

Safety Factor

Safety Factor



Stress

Von Mises



1st Principal



2nd Principal



Displacement

Total



Loads

Fixed



Loads

Linear Global Load



Type	Linear Global Load
Accelerations	
Y Direction	9.81 m/s^2
Z Direction	9.81 m/s^2
Unit	Metric

Load Case1 - Guided Results

Safety Factor



With the analysis criteria in the same place, there is opportunity to reduce the volume of material and cost of the design.

Start Ideas

Design Safety Factor Unit

Material case study

- Change the material to a steel with higher yield strength.
- Change the material to a steel with higher yield strength.
- Change the material to a steel with higher yield strength.

Pick other Ideas

- Change the Design Safety Factor Unit(Unit) to a case where the material yields and
- Change the Design Safety Factor Unit(Unit) to a case where the material yields and
- Change the Design Safety Factor Unit(Unit) to a case where the material yields and

Generate alternative designs

- Add more material to weak areas
- Add more material to weak areas
- Add more material to weak areas
- Reduce material in areas with low stress
- Reduce material in areas with low stress
- Reduce material in areas with low stress

Design Safety Factor Unit

Material case study

- Change the material to a steel with higher yield strength.
- Change the material to a steel with higher yield strength.
- Change the material to a steel with higher yield strength.

Pick other Ideas

- Change the Design Safety Factor Unit(Unit) to a case where the material yields and
- Change the Design Safety Factor Unit(Unit) to a case where the material yields and
- Change the Design Safety Factor Unit(Unit) to a case where the material yields and

Generate alternative designs

- Add more material to weak areas
- Add more material to weak areas
- Add more material to weak areas
- Reduce material in areas with low stress
- Reduce material in areas with low stress
- Reduce material in areas with low stress

Lightweight the design

- Reduce material in areas where the stress is low and the material yields not the intended
- Reduce material in areas where the stress is low and the material yields not the intended
- Reduce material in areas where the stress is low and the material yields not the intended

Generate alternative designs

- Reduce material in areas where the stress is low and the material yields not the intended
- Reduce material in areas where the stress is low and the material yields not the intended
- Reduce material in areas where the stress is low and the material yields not the intended

Load Case1 - Results

Result Summary			
Name	Last Result	Minimum	Maximum
Safety Factor			
	Safety Factor	0.7334	1.86e+295
Stress			
	Von Mises	0.0000 GN/MPa	1.4E-06 MPa
	1st Principal	-0.0000 MPa	0.0000 MPa
	2nd Principal	-0.0000 MPa	0.0000 MPa
	3rd Principal	-0.0000 MPa	-0.0000 MPa
	Normal XX	-0.0000 MPa	0.0000 MPa
	Normal YY	-0.0000 MPa	0.0000 MPa
	Normal ZZ	-0.0000 MPa	0.0000 MPa
	Shear XY	-0.0000 MPa	0.0000 MPa
	Shear YZ	-0.0000 MPa	0.0000 MPa
	Shear XZ	-0.0000 MPa	0.0000 MPa
Displacement			
	Total	0 mm	0.177 mm
	X	-0.0147 mm	0.0000 mm
	Y	-0.0000 mm	0.0000 mm
	Z	-0.0000 mm	0.0000 mm
Reaction Force			
	Total	0 N	0.000 N
	X	-0.000 N	0.000 N
	Y	-0.000 N	0.000 N
	Z	-0.000 N	0.000 N
Strain			
	Equivalent	-1.0000E-15	0.7000 ME
	1st Principal	-0.0000 ME	0.0000 ME
	2nd Principal	-2.0700 ME	-1.0000 ME
	3rd Principal	-0.0000 ME	0.0000 ME
	Normal XX	-0.0000 ME	0.0000 ME
	Normal YY	-0.0000 ME	0.0000 ME
	Normal ZZ	-0.0000 ME	0.0000 ME
	Shear XY	-0.0000 ME	0.0000 ME
	Shear YZ	-0.0000 ME	0.0000 ME
	Shear XZ	-0.0000 ME	0.0000 ME
Contact Pressure			
	Total	0 MPa	0.01 MPa
	X	-0.00 MPa	0.00 MPa
	Y	-0.00 MPa	0.00 MPa
	Z	-0.00 MPa	0.00 MPa
Contact Force			
	Total	0 N	0.01 N
	X	-0.00 N	0.00 N
	Y	-0.01 N	0.01 N
	Z	-0.00 N	0.00 N

Safety Factor

Safety Factor



Stress

Von Mises



1st Principal



2nd Principal



Displacement

Total



Load Case8

Constraints

Fixed03

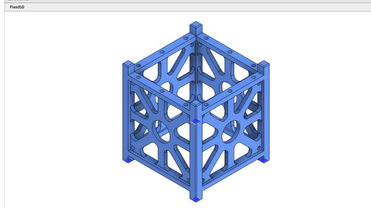

Type	Fixed
Ux	Fixed
Uy	Fixed
Uz	Fixed

Loads

Linear Global Load9

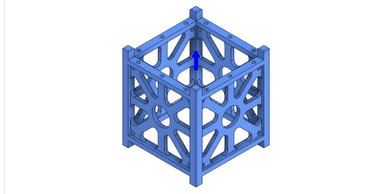

Type	Linear Global Load
Acceleration	
X Value	0.00 m / s^2
Y Value	0.00 m / s^2
Z Value	147.00 m / s^2

Load Case8 - Guided Results

Safety Factor

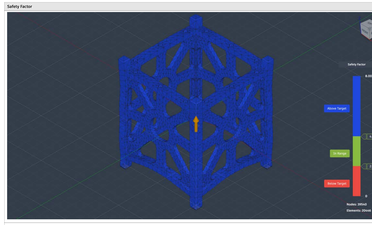

With the analysis criteria in this study setup, there is opportunity to reduce the volume of material and cost of this design.

Next Steps

Achieve your study setup
- Check the loads are not set too high
- Check the mesh refinement and consider increasing it in areas of high stress
- Confirm your Safety Factor requirement
- If the Displacement result shows high displacement, consider running a Nonlinear study to gain more insight

Check other results
- Examine the Below target Result visualization to see where the weakest areas are
- Check the stress result to see if, and where, the material might yield
- Check the displacement result to see how far from its original alignment the model has moved
- Look at other results, such as reaction forces to check your study set up, or strain to check your material performance

Lightweight the design
- Set a Safety Factor upper limit to find where material can be removed
- Remove material from areas that exceed the Safety Factor upper limit

Generate alternative designs
- In the Generative Design workspace, create design modifications
- Remove unnecessary material using a Shape Optimization study

Load Case8 - Results

Result Summary

Result type	Sub-result	Minimum	Maximum
Safety Factor			
	Safety Factor	315.349	395,326.953
Stress			
	Von Mises	2.0482-04 MPa	0.127 MPa
	1st Principal	-0.026 MPa	0.226 MPa
	3rd Principal	-0.045 MPa	0.082 MPa
	Normal XX	-0.04 MPa	0.095 MPa
	Normal YY	-0.036 MPa	0.096 MPa
	Normal ZZ	-0.026 MPa	0.206 MPa
	Shear XY	-0.032 MPa	0.032 MPa
	Shear YZ	-0.043 MPa	0.037 MPa
	Shear XZ	-0.038 MPa	0.055 MPa
Displacement			
	Total	0 mm	0.001 mm
	X	-1.221E-04 mm	1.278E-04 mm
	Y	-1.317E-04 mm	1.223E-04 mm
	Z	0 mm	0.001 mm
Reaction Force			
	Total	0 N	0.555 N
	X	-0.155 N	0.153 N
	Y	-0.13 N	0.122 N
	Z	-0.523 N	0 N
Strain			
	Equivalent	7.662E-08	6.818E-05
	1st Principal	6.877E-08	7.506E-05
	3rd Principal	-3.562E-05	-4.302E-08
	Normal XX	-1.516E-05	1.43E-05
	Normal YY	-1.729E-05	1.437E-05
	Normal ZZ	-5.299E-06	4.902E-05
	Shear XY	-1.184E-05	1.159E-05
	Shear YZ	-4.399E-05	3.602E-05
	Shear XZ	-3.773E-05	5.331E-05
Contact Pressure			
	Total	0 MPa	0.198 MPa
	X	-0.037 MPa	0.035 MPa
	Y	-0.024 MPa	0.038 MPa
	Z	-0.193 MPa	0.025 MPa
Contact Force			
	Total	0 N	0.061 N
	X	-0.042 N	0.064 N
	Y	-0.06 N	0.059 N
	Z	-0.035 N	0.023 N

Safety Factor

Safety Factor

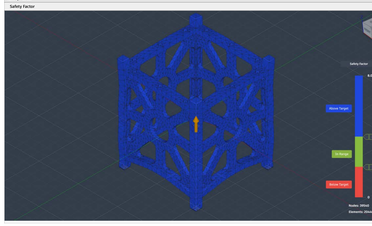

Stress

Von Mises

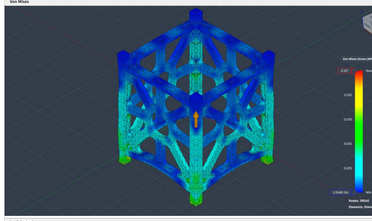

1st Principal

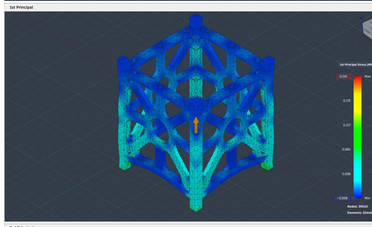

3rd Principal

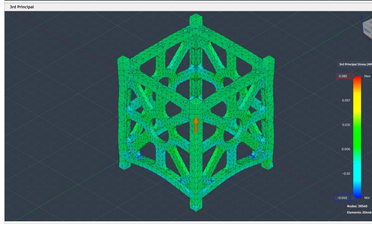

Displacement
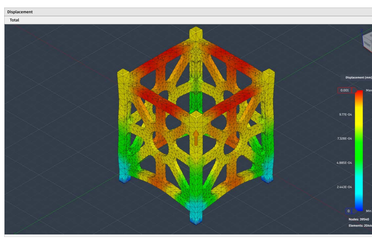
Total