



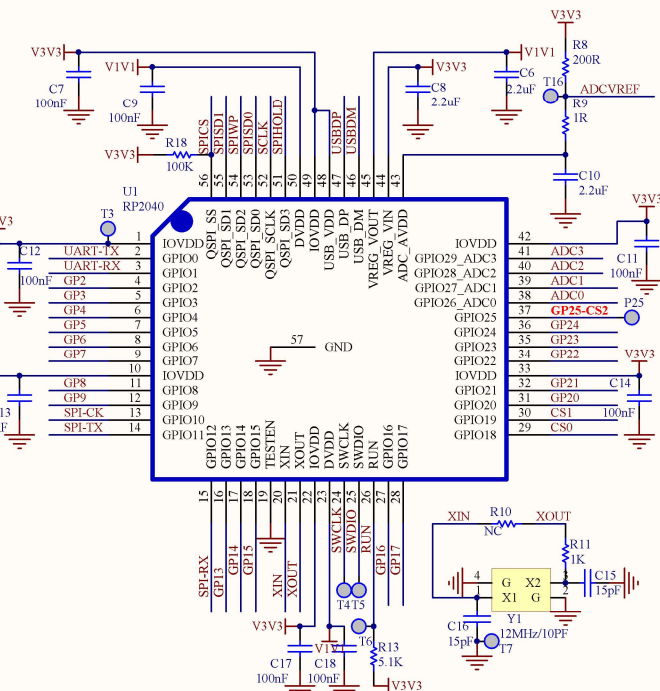
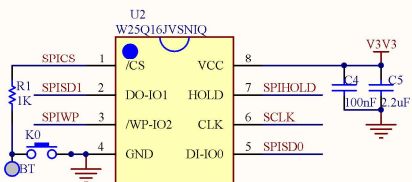





MCU--POWER

Sensor

LED-DEBUG




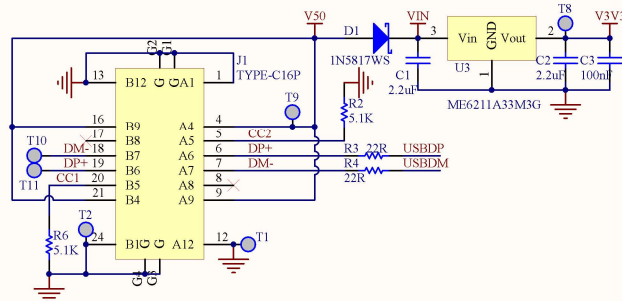


KEY

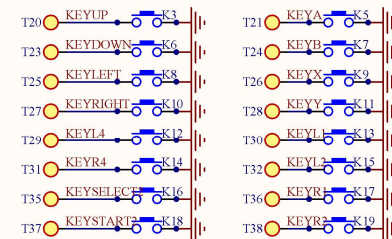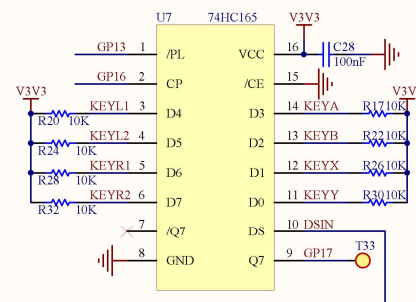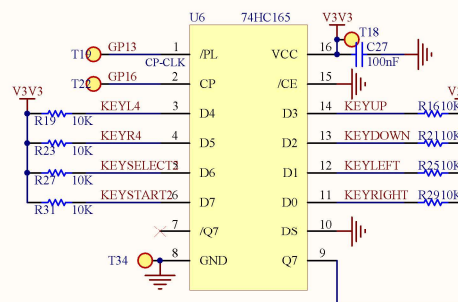

Stick--Motor

Wireless

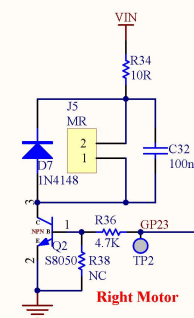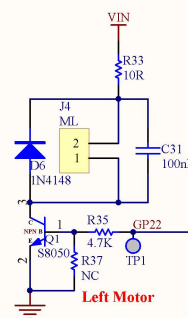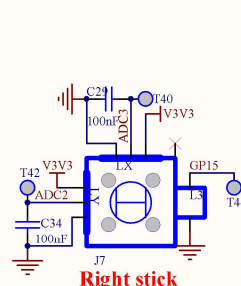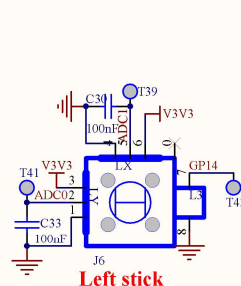

The GP25-CS2 pin is reserved as an interface for the wireless chip, which uses the SPI interface to communicate with the RP2040 chip